

OP-27A, OP-27C, OP-27E, OP-27G  
OP-37A, OP-37C, OP-37E, OP-37G  
LOW-NOISE, HIGH-SPEED, PRECISION OPERATIONAL AMPLIFIERS

D3176, FEBRUARY 1989

- Direct Replacements for PMI and LTC OP-27 and OP-37 Series

Features of OP-27A, OP-27C, OP-37A, and OP-37C:

- Maximum Equivalent Input Noise Voltage:  
3.8 nV/√Hz at 1 kHz  
5.5 nV/√Hz at 10 Hz
- Very Low Peak-to-Peak Noise Voltage at 0.1 Hz to 10 Hz . . . 80 nV Typ
- Low Input Offset Voltage . . . 25 μV Max
- High Voltage Amplification . . . 1 V/μV Min

Feature of OP-37 Series:

- Minimum Slew Rate . . . 11 V/μs

description

The OP-27 and OP-37 operational amplifiers combine outstanding noise performance with excellent precision and high-speed specifications. The wideband noise is only 3 nV/√Hz, and with the 1/f noise corner at 2.7 Hz, low noise is maintained for all low-frequency applications.

The outstanding characteristics of the OP-27 and OP-37 make these devices excellent choices for low-noise amplifier applications requiring precision performance and reliability. Additionally, the OP-37 is free of latch-up in high-gain, large-capacitive-feedback configurations.

The OP-27 series is compensated for unity gain. The OP-37 series is decompensated for increased bandwidth and slew rate and is stable down to a gain of 5.

The OP-27A, OP-27C, OP-37A, and OP-37C are characterized for operation over the full military temperature range of -55°C to 125°C. The OP-27E, OP-27G, OP-37E, and OP-37G are characterized for operation from -25°C to 85°C.

AVAILABLE OPTIONS


| TA             | VIO MAX AT 25°C | STABLE GAIN | PACKAGE          |               |                 |
|----------------|-----------------|-------------|------------------|---------------|-----------------|
|                |                 |             | CERAMIC DIP (JG) | METAL CAN (L) | PLASTIC DIP (P) |
| -25°C to 85°C  | 25 μV           | 1           | OP27EJG          | OP27EL        | OP27EP          |
|                |                 | 5           | OP37EJG          | OP37EL        | OP37EP          |
|                | 100 μV          | 1           | OP27GJG          | OP27GL        | OP27GP          |
|                |                 | 5           | OP37GJG          | OP37GL        | OP37GP          |
| -55°C to 125°C | 25 μV           | 1           | OP27AJG          | OP27AL        | OP27AP          |
|                |                 | 5           | OP37AJG          | OP37AL        | OP37AP          |
|                | 100 μV          | 1           | OP27CJG          | OP27CL        | OP27CP          |
|                |                 | 5           | OP37CJG          | OP37CL        | OP37CP          |

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.


TEXAS INSTRUMENTS  
POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

Copyright © 1989, Texas Instruments Incorporated

JG OR P PACKAGE (TOP VIEW) T-79-06-10




L PACKAGE (TOP VIEW)



NC—No internal connection

symbol




NOTICE

SEE ORDER OF DATA FOR ERRATA INFORMATION

OP-27A, OP-27C, OP-27E, OP-27G  
OP-37A, OP-37C, OP-37E, OP-37G  
LOW-NOISE, HIGH-SPEED, PRECISION OPERATIONAL AMPLIFIERS

T-79-06-10

schematic

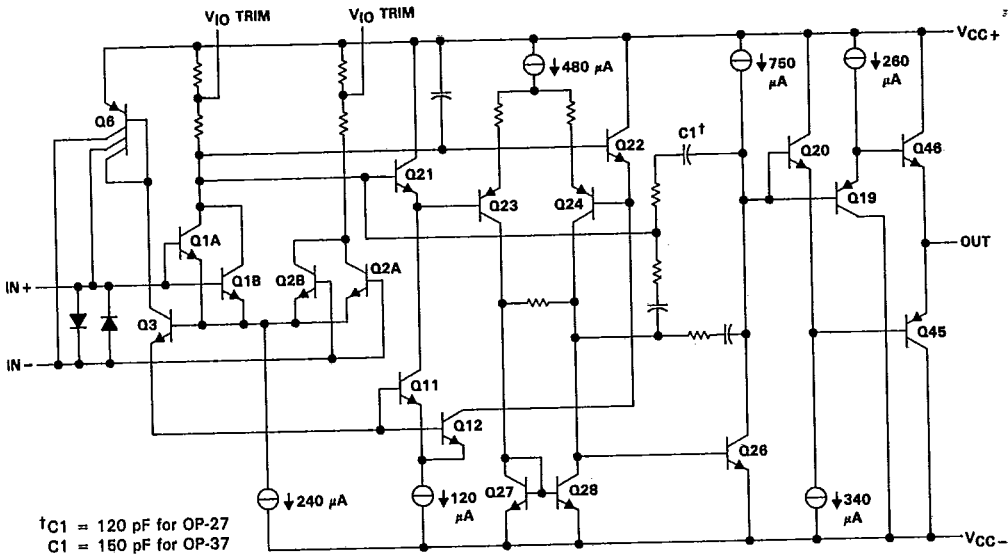

- absolute maximum ratings over operating free-air temperature range (unless otherwise noted)
- Supply voltage, VCC+ (see Note 1) . . . . . 22 V
  - Supply voltage, VCC- (see Note 1) . . . . . -22 V
  - Input voltage . . . . . VCC±
  - Duration of output short circuit . . . . . unlimited
  - Differential input current (see Note 2) . . . . . ±25 mA
  - Continuous power dissipation . . . . . see Dissipation Rating Table
  - Operating free-air temperature range: OP-27A, OP-27C, OP-37A, OP-37C . . . . . -55°C to 125°C
  - OP-27E, OP-27G, OP-37E, OP-37G . . . . . -25°C to 85°C
  - Storage temperature range . . . . . -65°C to 150°C
  - Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds: JG or L package . . . . . 300°C
  - Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: P package . . . . . 260°C

NOTES: 1. All voltage values are with respect to the midpoint between VCC+ and VCC- unless otherwise noted.  
2. The inputs are protected by back-to-back diodes. Current-limiting resistors are not used in order to achieve low noise. Excessive input current will flow if a differential input voltage in excess of approximately ±0.7 V is applied between the inputs unless some limiting resistance is used.

DISSIPATION RATING TABLE

| PACKAGE                             | T <sub>A</sub> ≤ 25°C | DERATING FACTOR<br>ABOVE T <sub>A</sub> = 25°C | T <sub>A</sub> = 85°C | T <sub>A</sub> = 125°C |
|-------------------------------------|-----------------------|------------------------------------------------|-----------------------|------------------------|
|                                     | POWER RATING          |                                                | POWER RATING          | POWER RATING           |
| JG (OP-27A, OP-27C, OP-37A, OP-37C) | 1050 mW               | 8.4 mW/°C                                      | 546 mW                | 210 mW                 |
| JG (OP-27E, OP-27G, OP-37E, OP-37G) | 825 mW                | 6.6 mW/°C                                      | 429 mW                | N/A                    |
| L (OP-27A, OP-27C, OP-37A, OP-37C)  | 825 mW                | 6.6 mW/°C                                      | 429 mW                | 165 mW                 |
| L (OP-27E, OP-27G, OP-37E, OP-37G)  | 650 mW                | 5.2 mW/°C                                      | 338 mW                | N/A                    |
| P                                   | 1000 mW               | 8.0 mW/°C                                      | 520 mW                | N/A                    |

T-79-06-10

recommended operating conditions

|                                       |                                                                          | OP-27A, OP-37A |     |     | OP-27C, OP-37C |     |     | UNIT             |
|---------------------------------------|--------------------------------------------------------------------------|----------------|-----|-----|----------------|-----|-----|------------------|
|                                       |                                                                          | MIN            | NOM | MAX | MIN            | NOM | MAX |                  |
| Supply voltage, $V_{CC+}$             |                                                                          | 4              | 15  | 22  | 4              | 15  | 22  | V                |
| Supply voltage, $V_{CC-}$             |                                                                          | -4             | -15 | -22 | -4             | -15 | -22 | V                |
| Common-mode input voltage, $V_{ICR}$  | $V_{CC\pm} = \pm 15$ V, $T_A = 25^\circ\text{C}$                         | $\pm 11$       |     |     | $\pm 11$       |     |     | V                |
|                                       | $V_{CC\pm} = \pm 15$ V, $T_A = -55^\circ\text{C}$ to $125^\circ\text{C}$ | $\pm 10.3$     |     |     | $\pm 10.2$     |     |     | V                |
| Operating free-air temperature, $T_A$ |                                                                          | -55            | 125 |     | -55            | 125 |     | $^\circ\text{C}$ |

electrical characteristics,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)

| PARAMETER                                                                | TEST CONDITIONS                                                                                                                                                                                                                 | $T_A$                                                            | OP-27A, OP-37A                                           |          |          | OP-27C, OP-37C                                             |          |           | UNIT                         |
|--------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|----------------------------------------------------------|----------|----------|------------------------------------------------------------|----------|-----------|------------------------------|
|                                                                          |                                                                                                                                                                                                                                 |                                                                  | MIN                                                      | TYP      | MAX      | MIN                                                        | TYP      | MAX       |                              |
| $V_{IO}$ Input offset voltage                                            | $V_O = 0$ , $V_{IC} = 0$<br>$R_S = 50 \Omega$ , See Note 3                                                                                                                                                                      | $25^\circ\text{C}$<br>$-55^\circ\text{C}$ to $125^\circ\text{C}$ |                                                          | 10       | 25       |                                                            | 30       | 100       | $\mu\text{V}$                |
|                                                                          |                                                                                                                                                                                                                                 |                                                                  |                                                          |          | 60       |                                                            |          | 300       |                              |
| $\propto V_{IO}$ Average temperature coefficient of input offset voltage |                                                                                                                                                                                                                                 | $-55^\circ\text{C}$ to $125^\circ\text{C}$                       |                                                          | 0.2      | 0.6      |                                                            | 0.4      | 1.8       | $\mu\text{V}/^\circ\text{C}$ |
| Long-term drift of input offset voltage                                  | See Note 4                                                                                                                                                                                                                      |                                                                  |                                                          | 0.2      | 1        |                                                            | 0.4      | 2         | $\mu\text{V}/\text{mo}$      |
| $I_{IO}$ Input offset current                                            | $V_O = 0$ , $V_{IC} = 0$                                                                                                                                                                                                        | $25^\circ\text{C}$<br>$-55^\circ\text{C}$ to $125^\circ\text{C}$ |                                                          | 7        | 35       |                                                            | 12       | 75        | nA                           |
|                                                                          |                                                                                                                                                                                                                                 |                                                                  |                                                          |          | 50       |                                                            |          | 135       |                              |
| $I_{IB}$ Input bias current                                              | $V_O = 0$ , $V_{IC} = 0$                                                                                                                                                                                                        | $25^\circ\text{C}$<br>$-55^\circ\text{C}$ to $125^\circ\text{C}$ |                                                          | $\pm 10$ | $\pm 40$ |                                                            | $\pm 15$ | $\pm 80$  | nA                           |
|                                                                          |                                                                                                                                                                                                                                 |                                                                  |                                                          |          | $\pm 60$ |                                                            |          | $\pm 150$ |                              |
| $V_{ICR}$ Common-mode input voltage range                                |                                                                                                                                                                                                                                 | $25^\circ\text{C}$<br>$-55^\circ\text{C}$ to $125^\circ\text{C}$ | $\pm 11$<br>$\pm 10.3$                                   |          |          | $\pm 11$<br>$\pm 10.2$                                     |          |           | V                            |
| $V_{OM}$ Peak output voltage swing                                       | $R_L \geq 2 \text{ k}\Omega$<br>$R_L \geq 0.6 \text{ k}\Omega$<br>$R_L \geq 2 \text{ k}\Omega$                                                                                                                                  | $25^\circ\text{C}$<br>$-55^\circ\text{C}$ to $125^\circ\text{C}$ | $\pm 12$ $\pm 13.8$<br>$\pm 10$ $\pm 11.5$<br>$\pm 11.5$ |          |          | $\pm 11.5$ $\pm 13.5$<br>$\pm 10$ $\pm 11.5$<br>$\pm 10.5$ |          |           | V                            |
| $A_{VD}$ Large-signal differential voltage amplification                 | $R_L \geq 2 \text{ k}\Omega$ , $V_O = \pm 10$ V<br>$R_L \geq 1 \text{ k}\Omega$ , $V_O = \pm 10$ V<br>$R_L \geq 0.6 \text{ k}\Omega$ , $V_O = \pm 1$ V<br>$V_{CC} = \pm 4$ V<br>$R_L \geq 2 \text{ k}\Omega$ , $V_O = \pm 10$ V | $25^\circ\text{C}$<br>$-55^\circ\text{C}$ to $125^\circ\text{C}$ | 1000 1800<br>800 1500<br>250 700<br>600                  |          |          | 700 1500<br>1500<br>200 500<br>300                         |          |           | V/mV                         |
| $r_{i(CM)}$ Common-mode input resistance                                 |                                                                                                                                                                                                                                 |                                                                  | 3                                                        |          |          | 2                                                          |          |           | G $\Omega$                   |
| $r_o$ Output resistance                                                  | $V_O = 0$ , $I_O = 0$                                                                                                                                                                                                           | $25^\circ\text{C}$                                               | 70                                                       |          |          | 70                                                         |          |           | $\Omega$                     |
| CMRR Common-mode rejection ratio                                         | $V_{IC} = \pm 11$ V<br>$V_{IC} = \pm 10$ V                                                                                                                                                                                      | $25^\circ\text{C}$<br>$-55^\circ\text{C}$ to $125^\circ\text{C}$ | 114 126<br>108                                           |          |          | 100 120<br>94                                              |          |           | dB                           |
| $k_{SVR}$ Supply voltage rejection ratio                                 | $V_{CC\pm} = \pm 4$ V to $\pm 18$ V<br>$V_{CC\pm} = \pm 4.5$ V to $\pm 18$ V                                                                                                                                                    | $25^\circ\text{C}$<br>$-55^\circ\text{C}$ to $125^\circ\text{C}$ | 100 120<br>96                                            |          |          | 94 118<br>86                                               |          |           | dB                           |

- NOTES: 3. Input offset voltage measurements are performed by automatic test equipment approximately 0.5 seconds after applying power.  
 4. Long-term drift of input offset voltage refers to the average trend line of offset voltage versus time over extended periods after the first 30 days of operation. Excluding the initial hour of operation, changes in  $V_{IO}$  during the first 30 days are typically 2.5  $\mu\text{V}$ . See Figure 3.

2  
Operational Amplifiers

## OP-27E, OP-37E, OP-27G, OP-37G

## LOW-NOISE, HIGH-SPEED, PRECISION OPERATIONAL AMPLIFIERS

T-79-06-10

## recommended operating conditions

|                                       | MIN                                                                      | NOM | MAX | UNIT             |
|---------------------------------------|--------------------------------------------------------------------------|-----|-----|------------------|
| Supply voltage, $V_{CC+}$             | 4                                                                        | 15  | 22  | V                |
| Supply voltage, $V_{CC-}$             | -4                                                                       | -15 | -22 | V                |
| Common-mode input voltage, range      | $V_{CC\pm} = \pm 15$ V, $T_A = 25^\circ\text{C}$                         |     |     | $\pm 11$ V       |
|                                       | $V_{CC\pm} = \pm 15$ V, $T_A = -55^\circ\text{C}$ to $125^\circ\text{C}$ |     |     | $\pm 10.5$ V     |
| Operating free-air temperature, $T_A$ | -25                                                                      |     | 85  | $^\circ\text{C}$ |

electrical characteristics,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)

| PARAMETER                                                               | TEST CONDITIONS                                            | $T_A$                                     | OP-27E, OP-37E |            |            | OP-27G, OP-37G |            |            | UNIT                         |
|-------------------------------------------------------------------------|------------------------------------------------------------|-------------------------------------------|----------------|------------|------------|----------------|------------|------------|------------------------------|
|                                                                         |                                                            |                                           | MIN            | TYP        | MAX        | MIN            | TYP        | MAX        |                              |
| $V_{IO}$ Input offset voltage                                           | $V_O = 0$ , $V_{IC} = 0$<br>$R_S = 50 \Omega$ , See Note 3 | $25^\circ\text{C}$                        |                | 10         | 25         |                | 30         | 100        | $\mu\text{V}$                |
|                                                                         |                                                            | $-25^\circ\text{C}$ to $85^\circ\text{C}$ |                |            | 50         |                |            | 220        |                              |
| $\alpha V_{IO}$ Average temperature coefficient of input offset voltage |                                                            | $-25^\circ\text{C}$ to $85^\circ\text{C}$ |                | 0.2        | 0.8        |                | 0.4        | 1.8        | $\mu\text{V}/^\circ\text{C}$ |
| Long-term drift of input offset voltage                                 | See Note 4                                                 |                                           |                | 0.2        | 1          |                | 0.4        | 2          | $\mu\text{V}/\text{mo}$      |
| $I_{IO}$ Input offset current                                           | $V_O = 0$ , $V_{IC} = 0$                                   | $25^\circ\text{C}$                        |                | 7          | 35         |                | 12         | 75         | nA                           |
|                                                                         |                                                            | $-25^\circ\text{C}$ to $85^\circ\text{C}$ |                |            | 50         |                |            | 135        |                              |
| $I_{IB}$ Input bias current                                             | $V_O = 0$ , $V_{IC} = 0$                                   | $25^\circ\text{C}$                        |                | $\pm 10$   | $\pm 40$   |                | $\pm 15$   | $\pm 80$   | nA                           |
|                                                                         |                                                            | $-25^\circ\text{C}$ to $85^\circ\text{C}$ |                |            | $\pm 60$   |                |            | $\pm 150$  |                              |
| $V_{ICR}$ Common-mode input voltage range                               |                                                            | $25^\circ\text{C}$                        |                | $\pm 11$   |            |                | $\pm 11$   |            | V                            |
|                                                                         |                                                            | $-25^\circ\text{C}$ to $85^\circ\text{C}$ |                | $\pm 10.5$ |            |                | $\pm 10.5$ |            |                              |
| $V_{OM}$ Peak output voltage swing                                      | $R_L \geq 2 \text{ k}\Omega$                               | $25^\circ\text{C}$                        |                | $\pm 12$   | $\pm 13.8$ |                | $\pm 11.5$ | $\pm 13.5$ | V                            |
|                                                                         | $R_L \geq 0.6 \text{ k}\Omega$                             |                                           |                | $\pm 10$   | $\pm 11.5$ |                | $\pm 10$   | $\pm 11.5$ |                              |
|                                                                         | $R_L \geq 2 \text{ k}\Omega$                               | $-25^\circ\text{C}$ to $85^\circ\text{C}$ |                | $\pm 11.7$ |            |                | $\pm 11$   |            |                              |
| AVD Large-signal differential voltage amplification                     | $R_L \geq 2 \text{ k}\Omega$ , $V_O = \pm 10$ V            | $25^\circ\text{C}$                        |                | 1000       | 1800       |                | 700        | 1500       | V/mV                         |
|                                                                         | $R_L \geq 1 \text{ k}\Omega$ , $V_O = \pm 10$ V            |                                           |                | 800        | 1500       |                |            | 1500       |                              |
|                                                                         | $R_L \geq 0.6 \text{ k}\Omega$ , $V_O = \pm 1$ V           |                                           |                | 250        | 700        |                | 200        | 500        |                              |
|                                                                         | $V_{CC} = \pm 4$ V                                         |                                           |                |            |            |                |            |            |                              |
|                                                                         | $R_L \geq 2 \text{ k}\Omega$ , $V_O = \pm 10$ V            | $-25^\circ\text{C}$ to $85^\circ\text{C}$ |                | 750        |            |                | 450        |            |                              |
| $r_{i(CM)}$ Common-mode input resistance                                |                                                            |                                           |                | 3          |            |                | 2          |            | G $\Omega$                   |
| $r_o$ Output resistance                                                 | $V_O = 0$ , $I_O = 0$                                      | $25^\circ\text{C}$                        |                | 70         |            |                | 70         |            | $\Omega$                     |
| CMRR Common-mode rejection ratio                                        | $V_{IC} = \pm 11$ V                                        | $25^\circ\text{C}$                        |                | 114        | 126        |                | 100        | 120        | dB                           |
|                                                                         | $V_{IC} = \pm 10$ V                                        | $-25^\circ\text{C}$ to $85^\circ\text{C}$ |                | 110        |            |                | 96         |            |                              |
| kSVR Supply voltage rejection ratio                                     | $V_{CC\pm} = \pm 4$ V to $\pm 18$ V                        | $25^\circ\text{C}$                        |                | 100        | 120        |                | 94         | 118        | dB                           |
|                                                                         | $V_{CC\pm} = \pm 4.5$ V to $\pm 18$ V                      | $-25^\circ\text{C}$ to $85^\circ\text{C}$ |                | 97         |            |                | 90         |            |                              |

NOTES: 3. Input offset voltage measurements are performed by automatic test equipment approximately 0.5 seconds after applying power.

4. Long-term drift of input offset voltage refers to the average trend line of offset voltage versus time over extended periods after the first 30 days of operation. Excluding the initial hour of operation, changes in  $V_{IO}$  during the first 30 days are typically 2.5  $\mu\text{V}$ . See Figure 3.

T-79-06-10 OP-27A, OP-27C, OP-27E, OP-27G  
OP-37A, OP-37C, OP-37E, OP-37G  
LOW-NOISE, HIGH-SPEED, PRECISION OPERATIONAL AMPLIFIERS

OP-27 operating characteristics over operating free-air temperature range, VCC± = ± 15 V

| PARAMETER |                                             | TEST CONDITIONS                                                             | OP-27A, OP-27E |      |      | OP-27C, OP-27G |      |      | UNIT                   |
|-----------|---------------------------------------------|-----------------------------------------------------------------------------|----------------|------|------|----------------|------|------|------------------------|
|           |                                             |                                                                             | MIN            | TYP  | MAX  | MIN            | TYP  | MAX  |                        |
| SR        | Slew rate at unity gain                     | $A_{VD} \geq 1, R_L \geq 2 \text{ k}\Omega$                                 | 1.7            | 2.8  |      | 1.7            | 2.8  |      | V/ $\mu$ s             |
| $V_{NPP}$ | Peak-to-peak equivalent input noise voltage | $f = 0.1 \text{ Hz to } 10 \text{ Hz}, R_S = 100 \Omega$ ,<br>See Figure 34 |                | 0.08 | 0.18 |                | 0.09 | 0.25 | $\mu$ V                |
| $V_n$     | Equivalent input noise voltage              | $f = 10 \text{ Hz}, R_S = 100 \Omega$                                       |                | 3.5  | 5.5  |                | 3.8  | 8    | nV/ $\sqrt{\text{Hz}}$ |
|           |                                             | $f = 30 \text{ Hz}, R_S = 100 \Omega$                                       |                | 3.1  | 4.5  |                | 3.3  | 5.6  |                        |
|           |                                             | $f = 1 \text{ kHz}, R_S = 100 \Omega$                                       |                | 3.0  | 3.8  |                | 3.2  | 4.5  |                        |
| $I_n$     | Equivalent input noise current              | $f = 10 \text{ Hz}$ , See Figure 35                                         |                | 1.5  | 4    |                | 1.5  |      | pA/ $\sqrt{\text{Hz}}$ |
|           |                                             | $f = 30 \text{ Hz}$ , See Figure 35                                         |                | 1.0  | 2.3  |                | 1.0  |      |                        |
|           |                                             | $f = 1 \text{ kHz}$ , See Figure 35                                         |                | 0.4  | 0.6  |                | 0.4  | 0.6  |                        |
| GBW       | Gain bandwidth product                      | $f = 100 \text{ kHz}$                                                       | 5              | 8    |      | 5              | 8    |      | MHz                    |

OP-37 operating characteristics over operating free-air temperature range, VCC± = ± 15 V

| PARAMETER        |                                             | TEST CONDITIONS                                                             | OP-37A, OP-37E |      |      | OP-37C, OP-37G |      |      | UNIT                   |
|------------------|---------------------------------------------|-----------------------------------------------------------------------------|----------------|------|------|----------------|------|------|------------------------|
|                  |                                             |                                                                             | MIN            | TYP  | MAX  | MIN            | TYP  | MAX  |                        |
| SR               | Slew rate at unity gain                     | $A_{VD} \geq 5, R_L \geq 2 \text{ k}\Omega$                                 | 11             | 17   |      | 11             | 17   |      | V/ $\mu$ s             |
| V <sub>NPP</sub> | Peak-to-peak equivalent input noise voltage | $f = 0.1 \text{ Hz to } 10 \text{ Hz}, R_S = 100 \Omega$ ,<br>See Figure 34 |                | 0.08 | 0.18 |                | 0.09 | 0.25 | $\mu$ V                |
| V <sub>n</sub>   | Equivalent input noise voltage              | $f = 10 \text{ Hz}, R_S = 100 \Omega$                                       |                | 3.5  | 5.5  |                | 3.8  | 8    | nV/ $\sqrt{\text{Hz}}$ |
|                  |                                             | $f = 30 \text{ Hz}, R_S = 100 \Omega$                                       |                | 3.1  | 4.5  |                | 3.3  | 5.6  |                        |
|                  |                                             | $f = 1 \text{ kHz}, R_S = 100 \Omega$                                       |                | 3.0  | 3.8  |                | 3.2  | 4.5  |                        |
| I <sub>n</sub>   | Equivalent input noise current              | $f = 10 \text{ Hz}$ , See Figure 35                                         |                | 1.5  | 4    |                | 1.5  |      | pA/ $\sqrt{\text{Hz}}$ |
|                  |                                             | $f = 30 \text{ Hz}$ , See Figure 35                                         |                | 1.0  | 2.3  |                | 1.0  |      |                        |
|                  |                                             | $f = 1 \text{ kHz}$ , See Figure 35                                         |                | 0.4  | 0.6  |                | 0.4  | 0.6  |                        |
| GBW              | Gain bandwidth product                      | $f = 10 \text{ kHz}$                                                        | 45             | 63   |      | 45             | 63   |      | MHz                    |
|                  |                                             | $A_V \geq 5, f = 1 \text{ MHz}$                                             |                | 40   |      |                | 40   |      |                        |

2  
Operational Amplifiers

OP-27A, OP-27C, OP-27E, OP-27G

OP-37A, OP-37C, OP-37E, OP-37G

LOW-NOISE, HIGH-SPEED, PRECISION OPERATIONAL AMPLIFIERS

T-79-06-10

## TYPICAL CHARACTERISTICS

table of graphs

|                 |                                     |                           | FIGURE     |
|-----------------|-------------------------------------|---------------------------|------------|
| $V_{IO}$        | Input offset voltage                | vs Temperature            | 1          |
| $\Delta V_{IO}$ | Change in input offset voltage      | vs Time after power-on    | 2          |
|                 |                                     | vs Time (long-term drift) | 3          |
| $I_{IO}$        | Input offset current                | vs Temperature            | 4          |
| $I_{IB}$        | Input bias current                  | vs Temperature            | 5          |
| $V_{ICR}$       | Common-mode input voltage range     | vs Supply voltage         | 6          |
| $V_{OM}$        | Maximum peak output voltage         | vs Load resistance        | 7          |
| $V_{OPP}$       | Maximum peak-to-peak output voltage | vs Frequency              | 8, 9       |
| $A_{VD}$        | Differential voltage amplification  | vs Supply voltage         | 10         |
|                 |                                     | vs Load resistance        | 11         |
|                 |                                     | vs Frequency              | 12, 13, 14 |
| CMRR            | Common-mode rejection ratio         | vs Frequency              | 15         |
| kSVR            | Supply voltage rejection ratio      | vs Frequency              | 16         |
| SR              | Slew rate                           | vs Temperature            | 17         |
|                 |                                     | vs Supply voltage         | 18         |
|                 |                                     | vs Load resistance        | 19         |
| $\phi_m$        | Phase margin                        | vs Temperature            | 20, 21     |
| $\phi$          | Phase shift                         | vs Frequency              | 12, 13     |
| $V_n$           | Equivalent input noise voltage      | vs Bandwidth              | 22         |
|                 |                                     | vs Source resistance      | 23         |
|                 |                                     | vs Supply voltage         | 24         |
|                 |                                     | vs Temperature            | 25         |
|                 |                                     | vs Frequency              | 26         |
| $I_n$           | Equivalent input noise current      | vs Frequency              | 27         |
| GBW             | Gain bandwidth product              | vs Temperature            | 20, 21     |
| $I_{OS}$        | Short-circuit output current        | vs Time                   | 28         |
| $I_{CC}$        | Supply current                      | vs Supply voltage         | 29         |
|                 | Pulse response                      | Small-signal              | 30, 32     |
|                 |                                     | Large-signal              | 31, 33     |

2

Operational Amplifiers

TYPICAL CHARACTERISTICS†

T-79-06-10

INPUT OFFSET VOLTAGE  
OF REPRESENTATIVE UNIT  
VS  
FREE-AIR TEMPERATURE

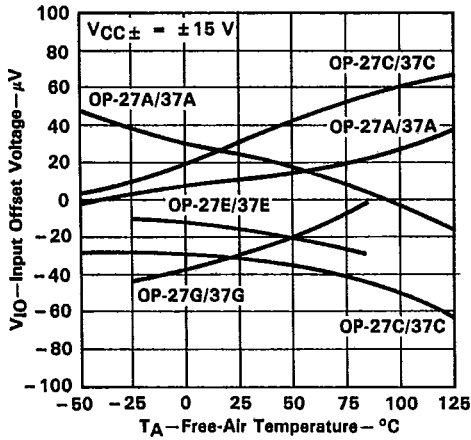


FIGURE 1

WARM-UP CHANGE IN  
INPUT OFFSET VOLTAGE  
VS  
ELAPSED TIME

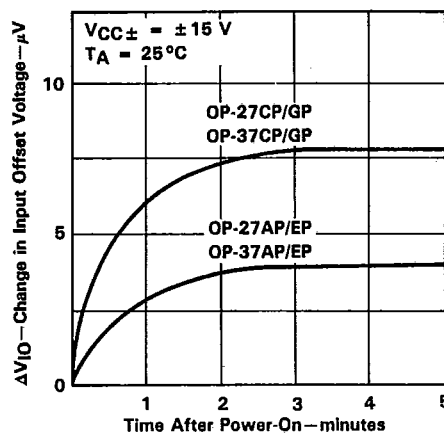


FIGURE 2

LONG-TERM DRIFT OF  
INPUT OFFSET VOLTAGE  
OF REPRESENTATIVE UNITS

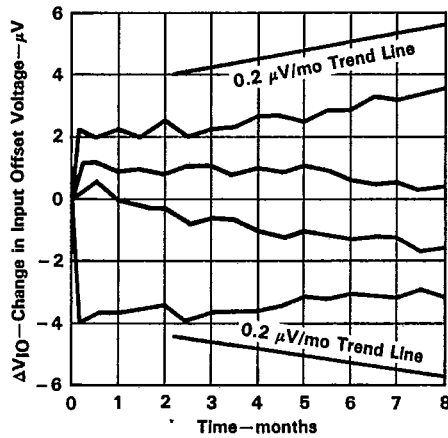


FIGURE 3

†Data for temperatures below  $-25^{\circ}\text{C}$  and above  $85^{\circ}\text{C}$  are applicable to the OP-27A, OP-27C, OP-37A, and OP-37C only.

TYPICAL CHARACTERISTICS†

INPUT OFFSET CURRENT  
vs  
FREE-AIR TEMPERATURE

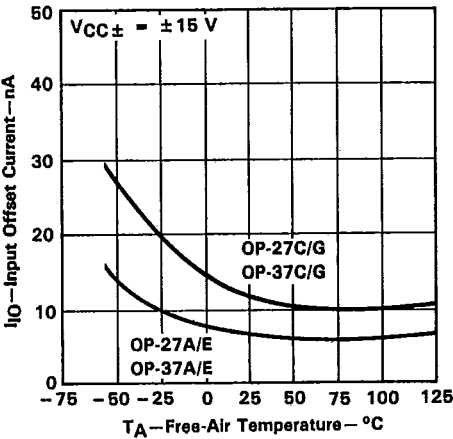


FIGURE 4

INPUT BIAS CURRENT  
vs  
FREE-AIR TEMPERATURE

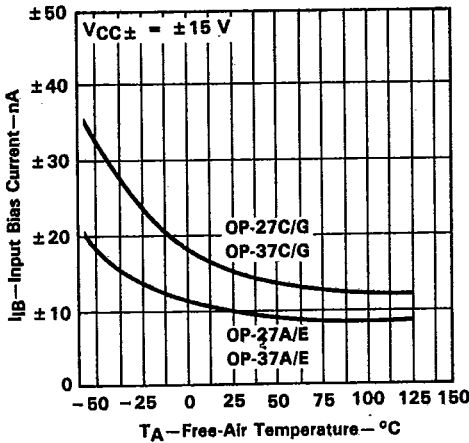


FIGURE 5

COMMON-MODE INPUT VOLTAGE RANGE LIMITS  
vs  
SUPPLY VOLTAGE

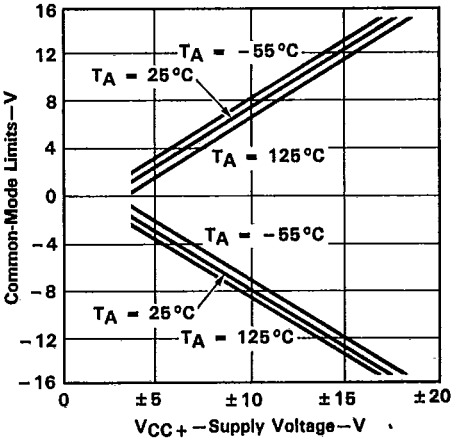


FIGURE 6

MAXIMUM PEAK OUTPUT VOLTAGE  
vs  
LOAD RESISTANCE

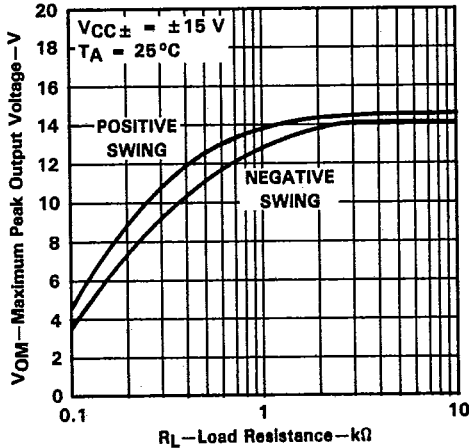


FIGURE 7

†Data for temperatures below  $-25^\circ\text{C}$  and above  $85^\circ\text{C}$  are applicable to the OP-27A, OP-27C, OP-37A, and OP-37C only.



OP-27A, OP-27C, OP-27E, OP-27G  
 OP-37A, OP-37C, OP-37E, OP-37G

LOW-NOISE, HIGH-SPEED, PRECISION OPERATIONAL AMPLIFIERS

## TYPICAL CHARACTERISTICS

T-79-06-10

OP-27  
 MAXIMUM PEAK-TO-PEAK  
 OUTPUT VOLTAGE  
 vs  
 FREQUENCY

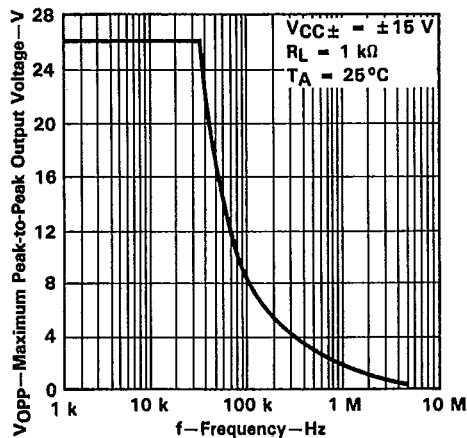


FIGURE 8

OP-37  
 MAXIMUM PEAK-TO-PEAK  
 OUTPUT VOLTAGE  
 vs  
 FREQUENCY

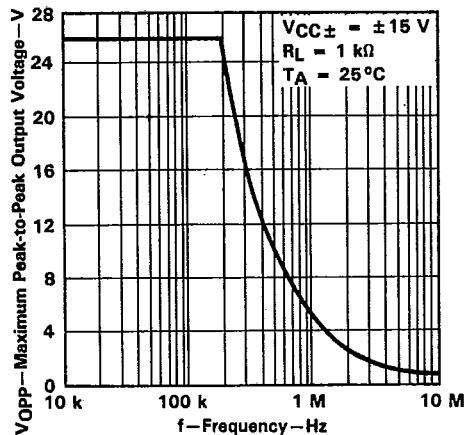


FIGURE 9

OP-27A, OP-27E, OP-37A, OP-37E  
 LARGE-SIGNAL  
 DIFFERENTIAL VOLTAGE AMPLIFICATION  
 vs  
 TOTAL SUPPLY VOLTAGE

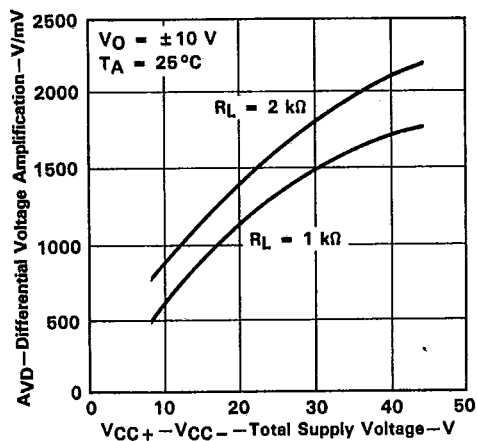


FIGURE 10

OP-27A, OP-27E, OP-37A, OP-37E  
 LARGE-SIGNAL  
 DIFFERENTIAL VOLTAGE AMPLIFICATION  
 vs  
 LOAD RESISTANCE

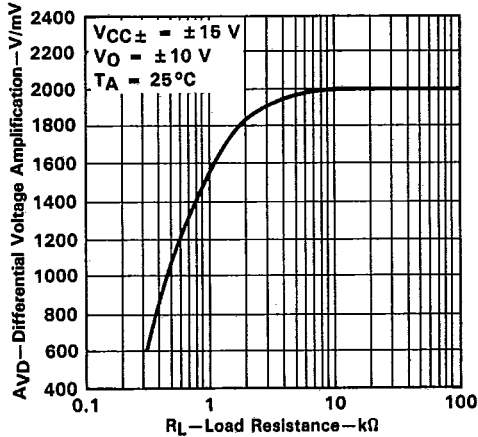


FIGURE 11

2

Operational Amplifiers

TYPICAL CHARACTERISTICS

OP-27  
 LARGE-SIGNAL DIFFERENTIAL  
 VOLTAGE AMPLIFICATION AND PHASE SHIFT  
 VS  
 FREQUENCY

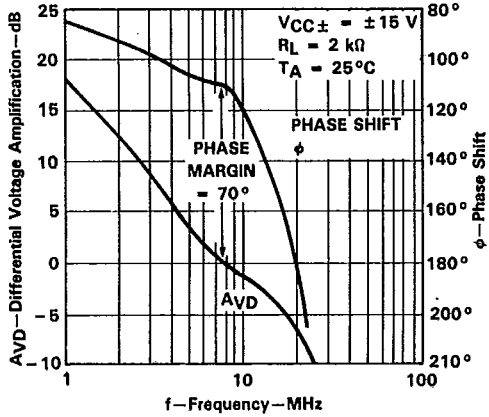


FIGURE 12

OP-37  
 LARGE-SIGNAL DIFFERENTIAL  
 VOLTAGE AMPLIFICATION AND PHASE SHIFT  
 VS  
 FREQUENCY

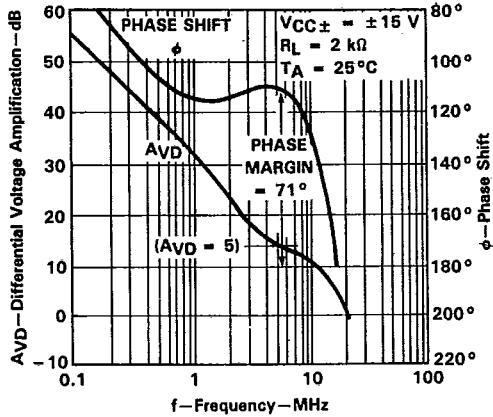


FIGURE 13

OP-27A, OP-27E, OP-37A, OP-37E  
 LARGE-SIGNAL  
 DIFFERENTIAL VOLTAGE AMPLIFICATION  
 VS  
 FREQUENCY

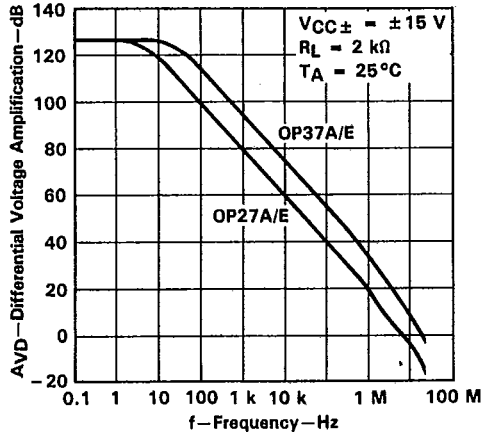


FIGURE 14

OP-27A, OP-27E, OP-37A, OP-37E  
 COMMON-MODE REJECTION RATIO  
 VS  
 FREQUENCY

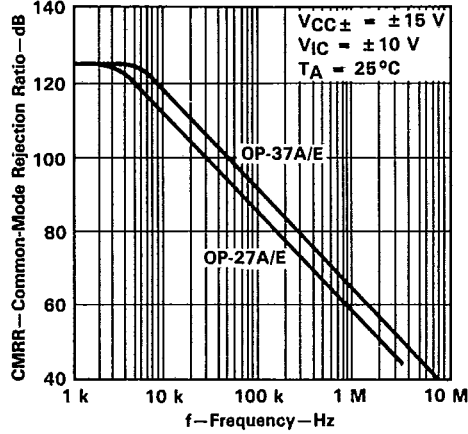


FIGURE 15

TYPICAL CHARACTERISTICS†

T-79-06-10

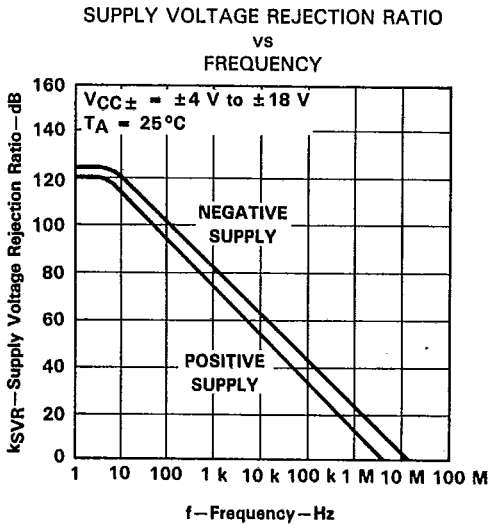


FIGURE 16

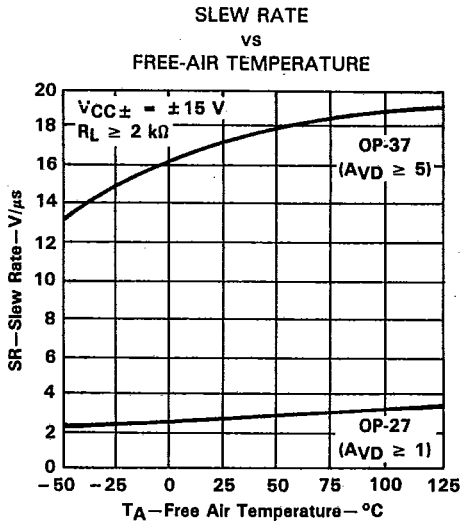


FIGURE 17

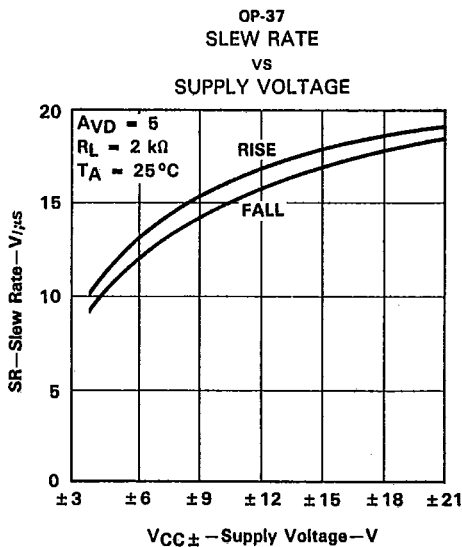


FIGURE 18

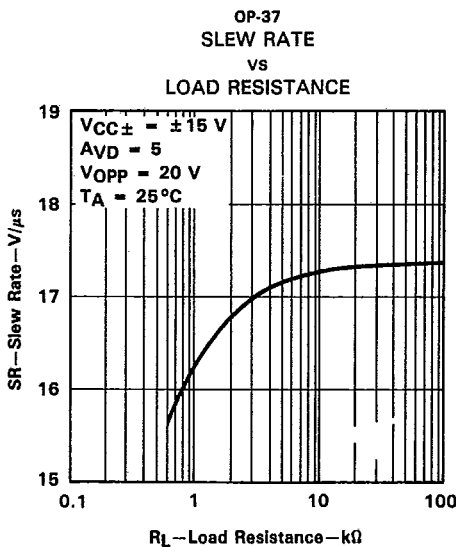


FIGURE 19

†Data for temperatures below  $-25^\circ\text{C}$  and above  $85^\circ\text{C}$  are applicable to the OP-27A, OP-27C, OP-37A, and OP-37C only.

TYPICAL CHARACTERISTICS†

2  
Operational Amplifiers

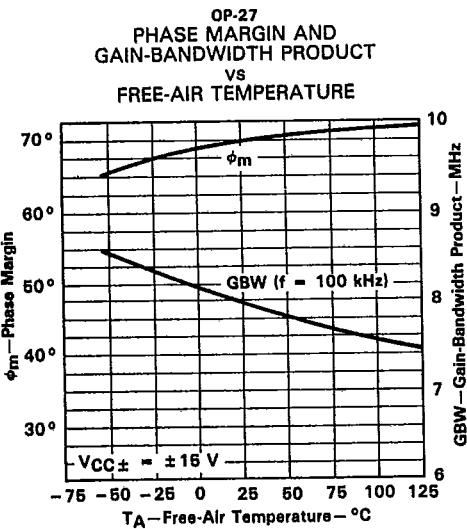


FIGURE 20

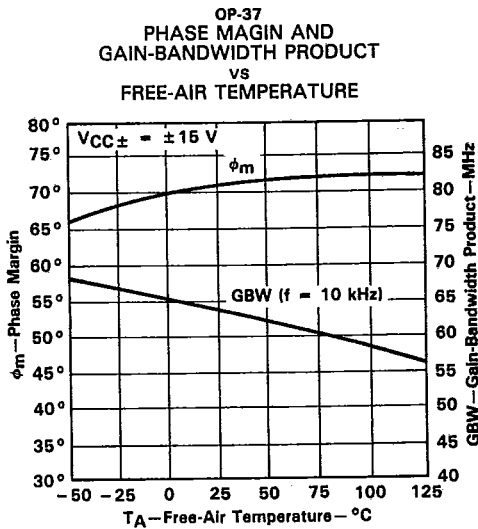


FIGURE 21

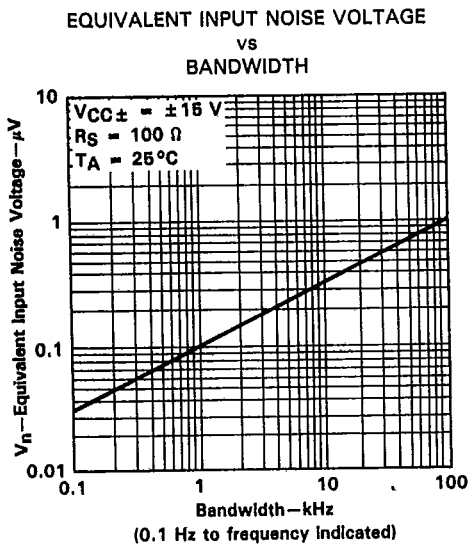


FIGURE 22

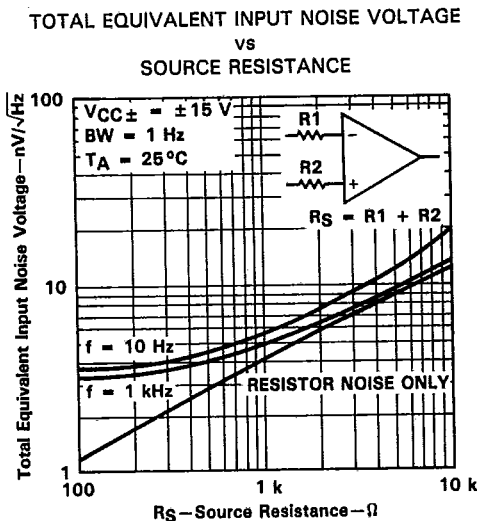


FIGURE 23

†Data for temperatures below  $-25^{\circ}\text{C}$  and above  $85^{\circ}\text{C}$  are applicable to the OP-27A, OP-27C, OP-37A, and OP-37C only.

OP-27A, OP-27C, OP-27E, OP-27G  
OP-37A, OP-37C, OP-37E, OP-37G  
LOW-NOISE, HIGH-SPEED, PRECISION OPERATIONAL AMPLIFIERS

TYPICAL CHARACTERISTICS†

T-79-06-10

OP-27A, OP-27E, OP-37A, OP-37E  
EQUIVALENT INPUT NOISE VOLTAGE  
vs  
TOTAL SUPPLY VOLTAGE

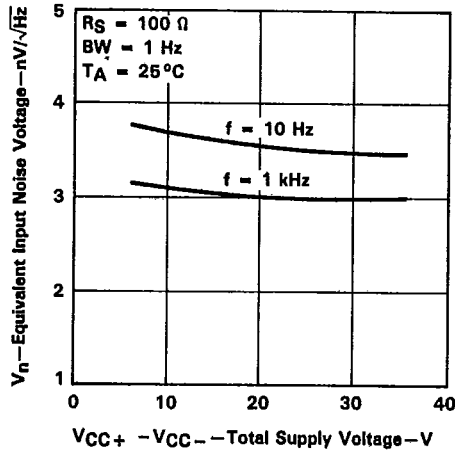


FIGURE 24

OP-27A, OP-27E, OP-37A, OP-37E  
EQUIVALENT INPUT NOISE VOLTAGE  
vs  
FREE-AIR TEMPERATURE

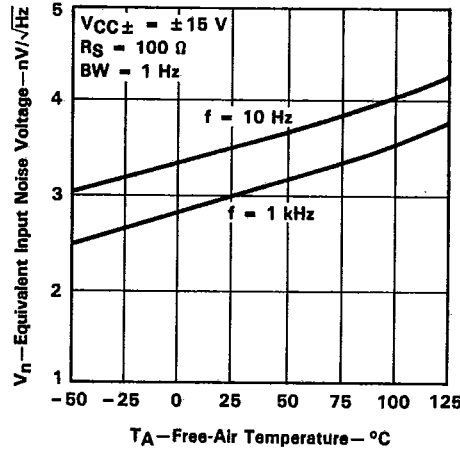


FIGURE 25

OP-27A, OP-27E, OP-37A, OP-37E  
EQUIVALENT INPUT NOISE VOLTAGE  
vs  
FREQUENCY

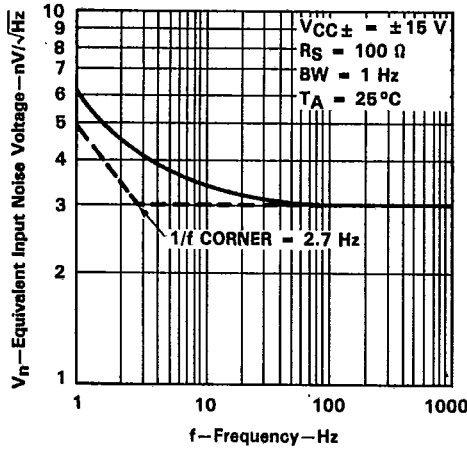


FIGURE 26

EQUIVALENT INPUT NOISE CURRENT  
vs  
FREQUENCY

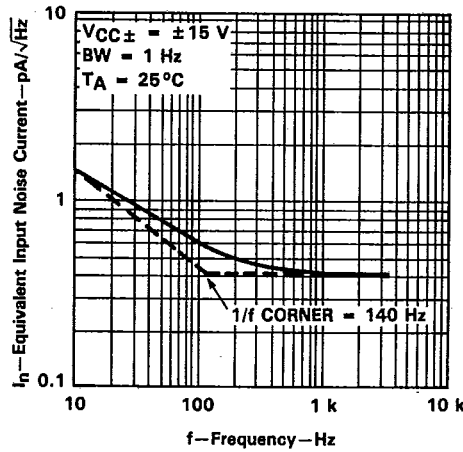


FIGURE 27

†Data for temperatures below -25°C and above 85°C are applicable to the OP-27A, OP-27C, OP-37A, and OP-37C only.

2

Operational Amplifiers

TEXAS  
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

TYPICAL CHARACTERISTICS†

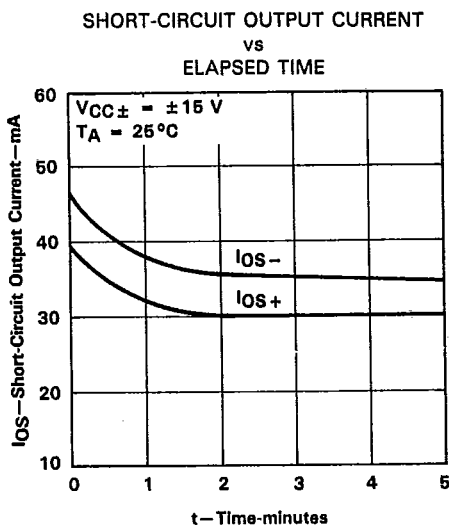


FIGURE 28

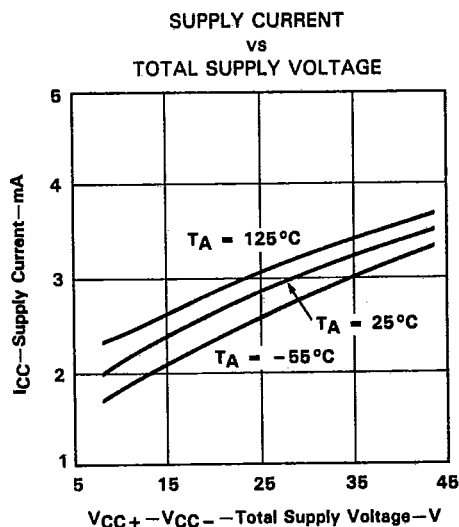


FIGURE 29

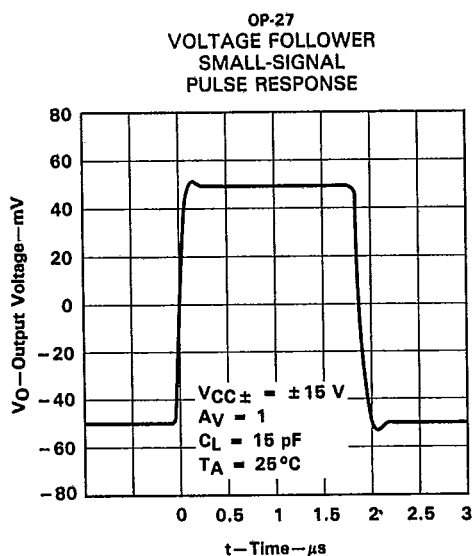


FIGURE 30

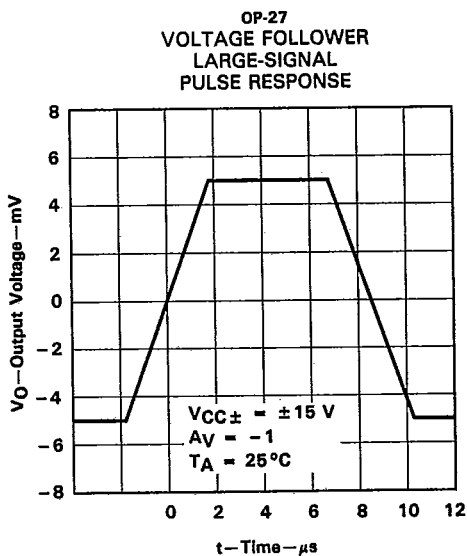


FIGURE 31

†Data for temperatures below -25°C and above 85°C are applicable to the OP-27A, OP-27C, OP-37A, and OP-37C only.

## TYPICAL CHARACTERISTICS

T-79-06-10

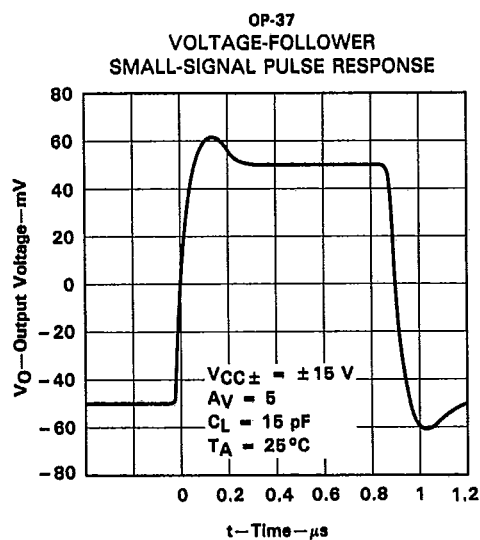


FIGURE 32

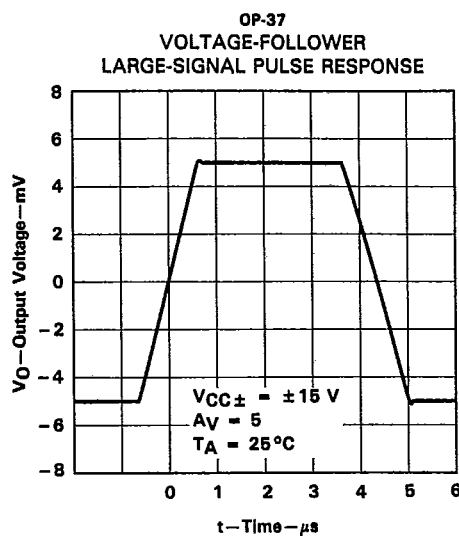


FIGURE 33

2

Operational Amplifiers

## TYPICAL APPLICATION DATA

## general

The OP-27 and OP-37 series devices may be inserted directly into OP-07, OP-05,  $\mu\text{A}725$ , and SE5534 sockets with or without removing external compensation or nulling components. In addition, the OP-27 and OP-37 may be fitted to  $\mu\text{A}741$  sockets by removing or modifying external nulling components.

## noise testing

Figure 34 shows a test circuit for 0.1-Hz to 10-Hz peak-to-peak noise measurement of the OP-27 and OP-37. The frequency response of this noise tester indicates that the 0.1-Hz corner is defined by only one zero. Because the time limit acts as an additional zero to eliminate noise contributions from the frequency band below 0.1 Hz, the test time to measure 0.1-Hz to 10-Hz noise should not exceed 10 seconds.

TYPICAL APPLICATION DATA

T-79-06-10

When measuring noise on a large number of units, a noise-voltage density test is recommended. A 10-Hz noise-voltage density measurement correlates well with a 0.1-Hz to 10-Hz peak-to-peak noise reading since both results are determined by the white noise and the location of the 1/f corner frequency.

Figure 35 shows a circuit measuring current noise and the formula for calculating current noise.

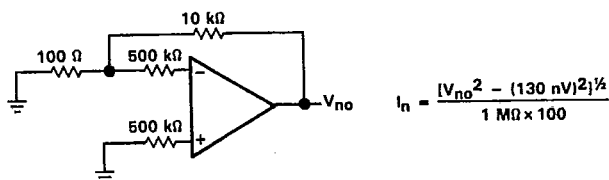


FIGURE 35. CURRENT NOISE TEST CIRCUIT AND FORMULA

offset voltage adjustment

The input offset voltage and temperature coefficient of the OP-27 and OP-37 are permanently trimmed to a low level at wafer testing. However, if further adjustment of  $V_{IO}$  is necessary, using a 10-k $\Omega$  nulling potentiometer, as shown in Figure 36, does not degrade the temperature coefficient  $\propto V_{IO}$ . Trimming to a value other than zero creates an  $\propto V_{IO}$  of  $V_{IO}/300 \mu\text{V}/^\circ\text{C}$ . For example, if  $V_{IO}$  is adjusted to 300  $\mu\text{V}$ , the change in  $\propto V_{IO}$  is 1  $\mu\text{V}/^\circ\text{C}$ .

The adjustment range with a 10-k $\Omega$  potentiometer is approximately  $\pm 2.5 \text{ mV}$ . If a smaller adjustment range is needed, the sensitivity and resolution of the nulling can be improved by using a smaller potentiometer in conjunction with fixed resistors. The example in Figure 37 has an approximate null range of  $\pm 200 \mu\text{V}$ .




FIGURE 36. STANDARD INPUT OFFSET VOLTAGE ADJUSTMENT




FIGURE 37. INPUT OFFSET VOLTAGE ADJUSTMENT WITH IMPROVED SENSITIVITY

offset voltage and drift



Unless proper care is exercised, thermocouple effects caused by temperature gradients across dissimilar metals at the contacts to the input terminals can exceed the inherent temperature coefficient  $\propto V_{IO}$  of the amplifier. Air currents should be minimized, package leads should be short, and the two input leads should be close together and at the same temperature.

The circuit shown in Figure 38 measures offset voltage. This circuit can also be used as the burn-in configuration for the OP-27 and OP-37, with the supply voltage increased to  $\pm 20 \text{ V}$ ,  $R_1 = R_3 = 10 \text{ k}\Omega$ ,  $R_2 = 200 \Omega$ , and  $A_{VP} = 100$ .



TYPICAL APPLICATION DATA

noise testing (continued)

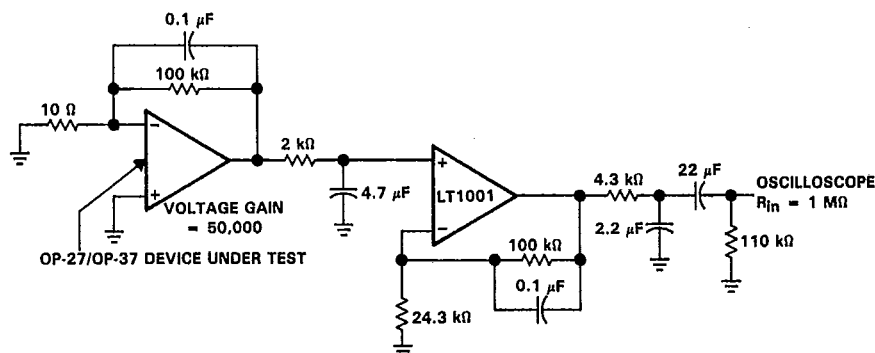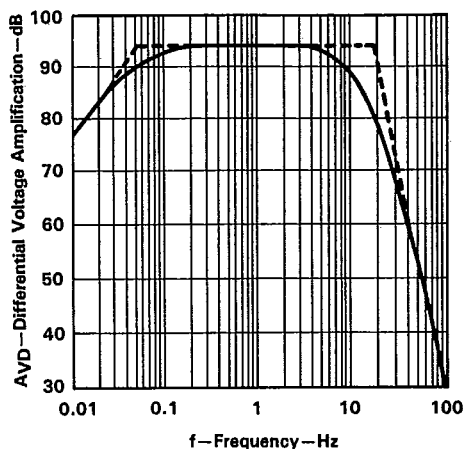

NOTE: All capacitor values are for non-polarized capacitors only.


FIGURE 34. 0.1-Hz TO 10-Hz PEAK-TO-PEAK NOISE TEST CIRCUIT AND FREQUENCY RESPONSE

Measuring the typical 80-nV peak-to-peak noise performance of the OP-27 and OP-37 requires the following special test precautions:

1. The device should be warmed up for at least five minutes. As the operational amplifier warms up, the offset voltage typically changes 4  $\mu$ V due to the chip temperature increasing from 10  $^{\circ}$ C to 20  $^{\circ}$ C starting from the moment the power supplies are turned on. In the 10-s measurement interval, these temperature-induced effects can easily exceed tens of nanovolts.
2. For similar reasons, the device should be well shielded from air currents to eliminate the possibility of thermoelectric effects in excess of a few nanovolts, which would invalidate the measurements.
3. Sudden motion in the vicinity of the device should be avoided, as it produces a feedthrough effect that increases observed noise.

TYPICAL APPLICATION DATA

T-79-06-10

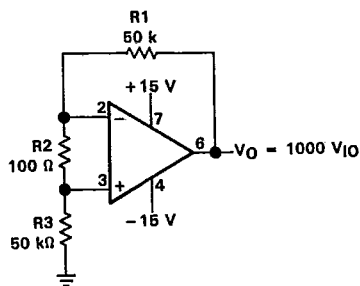

NOTE: Resistors must have low thermoelectric potential.

FIGURE 38. TEST CIRCUIT FOR OFFSET VOLTAGE AND OFFSET VOLTAGE TEMPERATURE COEFFICIENT

unity gain buffer applications

The resulting output waveform when  $R_f \leq 100 \Omega$  and the input is driven with a fast large-signal pulse ( $> 1 \text{ V}$ ) is shown in the pulsed-operation diagram in Figure 39.


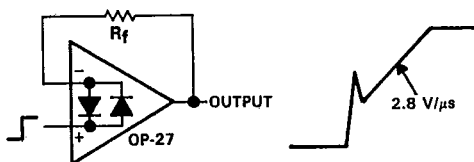


FIGURE 39. PULSED OPERATION


During the initial (fast-feedthrough-like) portion of the output waveform, the input protection diodes effectively short the output to the input, and a current, limited only by the output short-circuit protection, is drawn by the signal generator. When  $R_f \geq 500 \Omega$ , the output is capable of handling the current requirements (load current  $\leq 20 \text{ mA}$  at  $10 \text{ V}$ ), the amplifier stays in its active mode, and a smooth transition occurs. When  $R_f > 2 \text{ k}\Omega$ , a pole is created with  $R_f$  and the amplifier's input capacitance, creating additional phase shift and reducing the phase margin. A small capacitor ( $20 \text{ pF}$  to  $50 \text{ pF}$ ) in parallel with  $R_f$  eliminates this problem.

TYPICAL APPLICATION

T-79-06-10

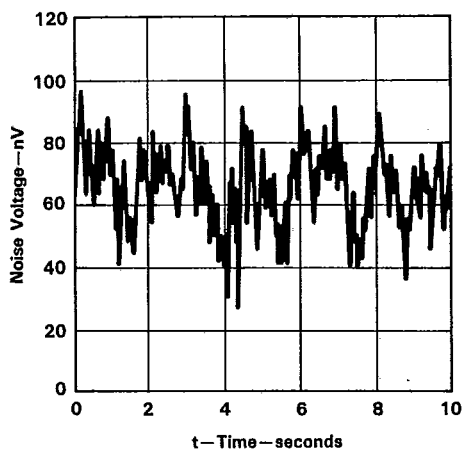

TYPE S THERMOCOUPLES  
 $5.4 \mu\text{V}/^\circ\text{C}$  AT  $0^\circ\text{C}$

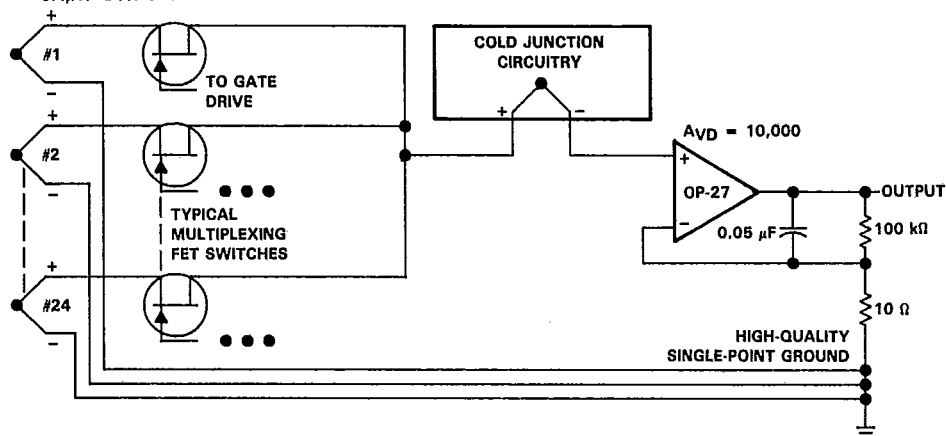

NOTE A: If 24 channels are multiplexed per second, and the output is required to settle to 0.1% accuracy, the amplifier's bandwidth cannot be limited to less than 30 Hz. The peak-to-peak noise contribution of the OP-27 will still be only  $0.11 \mu\text{V}$ , which is equivalent to an error of only  $0.02^\circ\text{C}$ .

FIGURE 40. LOW-NOISE, MULTIPLEXED THERMOCOUPLE AMPLIFIER  
 AND 0.1-Hz TO 10-Hz PEAK-TO-PEAK NOISE VOLTAGE

2

Operational Amplifiers

TEXAS  
 INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265