

# High-Side Sensing Constant Current Buck Controller for High Switching Frequency LED Driver FL7760

The FL7760 is a constant current step-down CCM controller for wide output power LED lighting applications. The FL7760 adapts hysteretic reference architecture that accurately regulates LED current by sensing voltage across an external high side sense resistor. This control scheme can stabilize LED current against input voltage and output load transient condition and implement optimal PWM and analog dimming control. Time delay control method widens analog dimming range down to less than 5%.

FL7760 has low 200 mV reference voltage to maximize system efficiency and high frequency driving capability so that system profile can be minimized in wide scale power ranges.


The FL7760 implements PWM and analog dimming together through a DIM pin and provides thermal shutdown (TSD), and under-voltage lockout (UVLO) protections.

## Features

- Wide Input Range (8 VDC~70 VDC)
- Continuous Conduction Mode Operation
- Hysteretic LED Current Control
- Wide analog dimming range down to 5%
- Wide PWM dimming duty range to 0.2% at 2 kHz PWM freq.
- High switching frequency up to 1 MHz
- High source / sink current of 1.5 A / 2.5 A
- Cycle-by-Cycle Peak Current Limit
- Low Operating Current (300 uA)
- Low Stand-by Current (240 uA)


## Typical Applications

- LED Lighting System



SOT23-6LD  
CASE 527AJ

## MARKING DIAGRAM



60 : Production Identifier  
x : Version (A or B)  
T : Wafer Lot Code  
--- Week Code  
--- Year Code

## ORDERING INFORMATION

See detailed ordering and shipping information on page 4 of this data sheet.

# FL7760

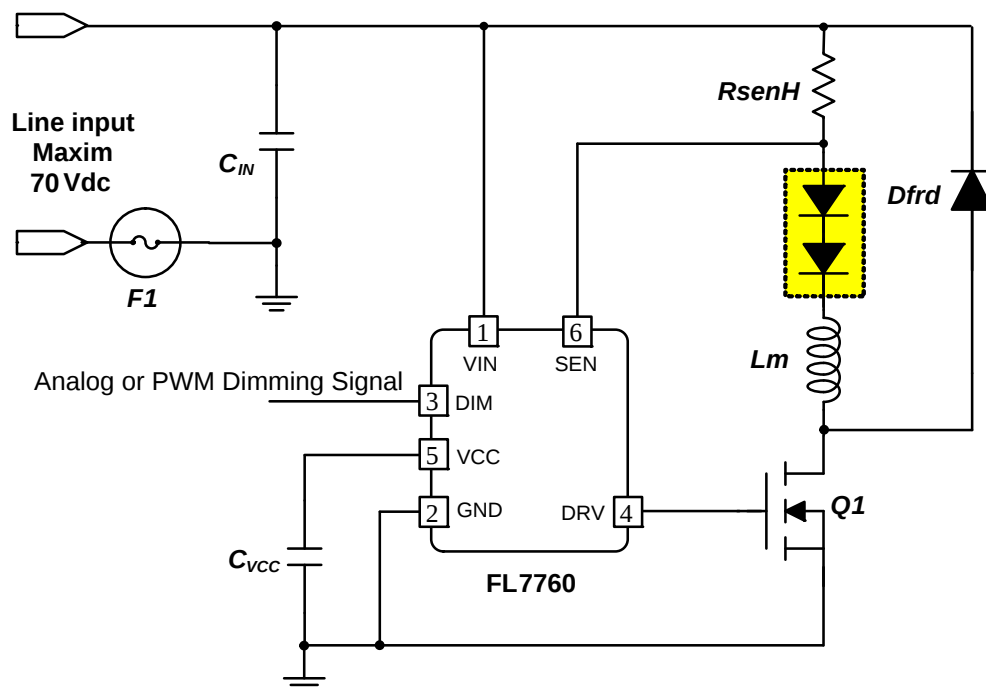


Figure 1. Application Schematic for Analog or PWM Dimming

Table 1. PIN FUNCTION DESCRIPTION

| Pin | Pin Name | Function                        | Description                                                                                                                                                                                                                |
|-----|----------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | VIN      | IC Input                        | Connect to the high voltage input line and supply current to the IC.                                                                                                                                                       |
| 2   | GND      | Ground                          | Ground of IC.                                                                                                                                                                                                              |
| 3   | DIM      | Analog / PWM / Hybrid / Dimming | DIM voltage determines LED current regulation reference and switching is terminated when DIM voltage is 0 V. If dimming function is not used, it is recommended to add a 0.1 $\mu$ F bypass capacitor between DIM and GND. |
| 4   | DRV      | Driver Output                   | Connect to the MOSFET gate.                                                                                                                                                                                                |
| 5   | VCC      | IC Supply                       | Supply pin for IC operation.                                                                                                                                                                                               |
| 6   | SEN      | Current Sense                   | The SEN pin is used to set the output LED current regulation.                                                                                                                                                              |



### Figure 2. Block Diagram

Table 2. MAXIMUM RATINGS

| Symbol      | Rating                                               | Value       | Unit |
|-------------|------------------------------------------------------|-------------|------|
| VIN(MAX)    | Maximum VIN Pin Voltage Range                        | -0.3 to 70  | V    |
| SEN(MAX)    | Maximum SEN Pin Voltage Range                        | -0.3 to 70  | V    |
| VCC(MAX)    | VCC Pin Voltage Range                                | -0.3 to 5.5 | V    |
| VDIM(MAX)   | DIM Pin Voltage Range                                | -0.3 to 5.5 | V    |
| VDRV(MAX)   | DRV Pin Voltage Range                                | -0.3 to 5.5 | V    |
| VCC(PULSE)  | Maximum VCC Pin Pulse Voltage at $t_{PULSE} < 20$ ns | 8           | V    |
| VDRV(PULSE) | Maximum DRV Pin Pulse Voltage at $t_{PULSE} < 20$ ns | 8           | V    |
| TJ(MAX)     | Maximum Junction Temperature                         | 150         | °C   |
| TSTG        | Storage Temperature Range                            | -65 to 150  | °C   |
| RθJA        | Junction-to-Ambient Thermal Impedance                | 263         | °C/W |
| PD          | Power Dissipation                                    | 247         | mW   |
| ESDHBM      | ESD Capability, Human Body Model (Note 2)            | 1.2         | kV   |
| ESDCDM      | ESD Capability, Charged Device Model (Note 2)        | 2           | kV   |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Refer to ELECTRICAL CHARACTERISTICS, RECOMMENDED OPERATING RANGES and/or APPLICATION INFORMATION for Safe Operating parameters
2. This device series incorporates ESD protection and is tested by the following methods  
 ESD Human Body Model tested per AEC-Q100-002 (EIA/JESD22-A114)  
 ESD Machine Model tested per AEC-Q100-003 (EIA/JESD22-A115)  
 Latchup Current Maximum Rating:  $\leq 150$  mA per JEDEC standard: JESD78

Table 3. ORDERING INFORMATION

| Device     | Package                                          | Shipping†   |
|------------|--------------------------------------------------|-------------|
| FL7760AM6X | 6LD,SOT23, JEDEC MO-178 VARIATION AB, 1.6MM WIDE | Tape & Reel |
| FL7760BM6X | 6LD,SOT23, JEDEC MO-178 VARIATION AB, 1.6MM WIDE | Tape & Reel |

Table 4. RECOMMENDED OPERATING RANGES

| Rating              | Symbol         | Min | Max | Unit |
|---------------------|----------------|-----|-----|------|
| Ambient Temperature | T <sub>A</sub> | -40 | 125 | °C   |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

Table 5. ELECTRICAL CHARACTERISTICS

(V<sub>CC</sub> = 5 V, For typical values T<sub>J</sub> = 25°C, for min/max values T<sub>J</sub> = -40°C to +125°C, Max T<sub>J</sub> = 150°C, unless otherwise noted)

| Characteristics                        | Condition             | Symbol              | Min  | Typ | Max  | Unit |
|----------------------------------------|-----------------------|---------------------|------|-----|------|------|
| <b>VIN SECTION</b>                     |                       |                     |      |     |      |      |
| Self BIAS Start Threshold Voltage      | V <sub>CC</sub> = 5 V | V <sub>IN,ON</sub>  | 7.05 | 7.5 | 7.95 | V    |
| Self BIAS Stop Threshold Voltage       | V <sub>CC</sub> = 5 V | V <sub>IN,OFF</sub> | 6.55 | 7   | 7.45 | V    |
| Self BIAS Current for Startup (Note 3) |                       | I <sub>ST</sub>     |      | 2   |      | mA   |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

3. This item is guaranteed by design.
4. This is only a recommended specification and there is no limit to the PWM Dimming frequency.
5. Drift after IC reliability test (JEDEC JESD22-A08) is not included.
6. This value indicates the change in internal reference voltage with temperature change and indicates the rate of change based on 25 °C ambient temperature. This item is guaranteed by design.

**Table 5. ELECTRICAL CHARACTERISTICS**(V<sub>CC</sub> = 5 V, For typical values T<sub>J</sub> = 25°C, for min/max values T<sub>J</sub> = -40°C to +125°C, Max T<sub>J</sub> = 150°C, unless otherwise noted)

| Characteristics                                             | Condition                                            | Symbol                     | Min    | Typ   | Max   | Unit  |
|-------------------------------------------------------------|------------------------------------------------------|----------------------------|--------|-------|-------|-------|
| <b>VCC SECTION</b>                                          |                                                      |                            |        |       |       |       |
| VCC Regulator Output Voltage                                | V <sub>VIN</sub> = 24 V <sub>DC</sub>                | V <sub>CC</sub>            | 4.5    | 5     | 5.5   | V     |
| IC Start Threshold Voltage                                  | V <sub>CC</sub> Increasing                           | V <sub>CC,ON</sub>         | 4.04   | 4.50  | 4.95  | V     |
| IC Stop Threshold Voltage                                   | V <sub>CC</sub> Decreasing                           | V <sub>CC,OFF</sub>        | 3.03   | 3.50  | 3.96  | V     |
| UVLO Hysteresis                                             |                                                      | V <sub>CC,HYS</sub>        | 0.505  | 1.000 | 1.485 | V     |
| Operation Current                                           | No Switching                                         | I <sub>CC</sub>            | 51     | 300   | 495   | uA    |
| Stand-by Current (Note 3)                                   | No Switching                                         | I <sub>stby</sub>          | 0.1    | 0.24  | 0.4   | mA    |
| <b>GATE SECTION</b>                                         |                                                      |                            |        |       |       |       |
| Gate High Voltage                                           |                                                      | V <sub>GATE,H</sub>        | 4.5    | 5     | 5.5   | V     |
| Gate Low Voltage                                            |                                                      | V <sub>GATE,L</sub>        |        |       | 0.5   | V     |
| Peak Pull-up Current (Note 3)                               | V <sub>CC</sub> = 5 V                                | I <sub>GATE,pullup</sub>   |        | 1.5   |       | A     |
| Peak Pull-down Current (Note 3)                             | V <sub>CC</sub> = 5 V                                | I <sub>GATE,pulldown</sub> |        | 2.5   |       | A     |
| Recommended Maximum Operating Frequency (Note 4)            |                                                      | F <sub>SW,MAX</sub>        |        | 1     |       | MHz   |
| <b>CURRENT-SENSE AND REFERENCE SECTION</b>                  |                                                      |                            |        |       |       |       |
| Internal Reference Voltage                                  | V <sub>DIM</sub> = 3.5 V<br>(T <sub>J</sub> = 25°C)  | V <sub>FB,DC</sub>         | 192    | 200   | 208   | mV    |
| Internal Reference Voltage Drift (Note 5)                   | V <sub>DIM</sub> = 3.5 V<br>(T <sub>J</sub> = 25°C)  | V <sub>FB,DC,R</sub>       | 196    | 200   | 204   | mV    |
| Variation of V <sub>FB,DC</sub> for Temperature (Note 6)    | V <sub>DIM</sub> = 3.5 V                             | V <sub>FB,DC,T</sub>       | ±118.2 |       |       | uV/°C |
| Feedback Reference Voltage Hysteresis                       | V <sub>DIM</sub> = 3.5 V                             | V <sub>FB,HYS</sub>        |        | ±30   |       | mV    |
| <b>SWITCHING SECTION</b>                                    |                                                      |                            |        |       |       |       |
| Minimum On-Time (Note 3)                                    |                                                      | t <sub>ON,MIN</sub>        |        | 200   |       | ns    |
| Minimum Off-Time (Note 3)                                   |                                                      | t <sub>OFF,MIN</sub>       |        | 200   |       | ns    |
| <b>DIMMING SECTION</b>                                      |                                                      |                            |        |       |       |       |
| Maximum Effective Dimming Voltage (Note 3)                  |                                                      | V <sub>DIM,MAX</sub>       | 2.7    | 3.0   | 3.3   | V     |
| Minimum Effective Dimming Voltage                           | V <sub>DIM</sub> > V <sub>DIM,R</sub> then decreased | V <sub>DIM,MIN</sub>       | 0.40   | 0.45  | 0.50  | V     |
| Dimming Recovery Voltage                                    |                                                      | V <sub>DIM,R</sub>         | 0.45   | 0.50  | 0.55  | V     |
| Internal Sourcing Current Pull up to 3V                     |                                                      | I <sub>pull up,DIM</sub>   | 5      | 6     | 7     | uA    |
| Delay Time at 0.5 V <sub>DIM</sub> (A version only, Note 3) | V <sub>DIM</sub> = 0.5 V                             | T <sub>Delay,max</sub>     | 5.00   | 5.35  | 5.70  | us    |
| Delay Time at 3 V <sub>DIM</sub> (A version only, Note 3)   | V <sub>DIM</sub> = 3 V                               | T <sub>Delay,min</sub>     | 28.5   | 30.0  | 31.5  | ns    |
| Blanking Time for Standby Mode (Note 3)                     | V <sub>DIM</sub> = 0 V                               | T <sub>Blank.stby</sub>    | 28     | 34    | 40    | ms    |
| <b>THERMAL SHUT DOWN SECTION</b>                            |                                                      |                            |        |       |       |       |
| Thermal Shutdown Temperature (Note 3)                       |                                                      |                            | 140    | 150   |       | °C    |
| Hysteresis Temperature of TSD (Note 3)                      |                                                      |                            |        | 30    |       | °C    |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

3. This item is guaranteed by design.

4. This is only a recommended specification and there is no limit to the PWM Dimming frequency.

5. Drift after IC reliability test (JEDEC JESD22-A08) is not included.

6. This value indicates the change in internal reference voltage with temperature change and indicates the rate of change based on 25 °C ambient temperature. This item is guaranteed by design.

TYPICAL CHARACTERISTICS

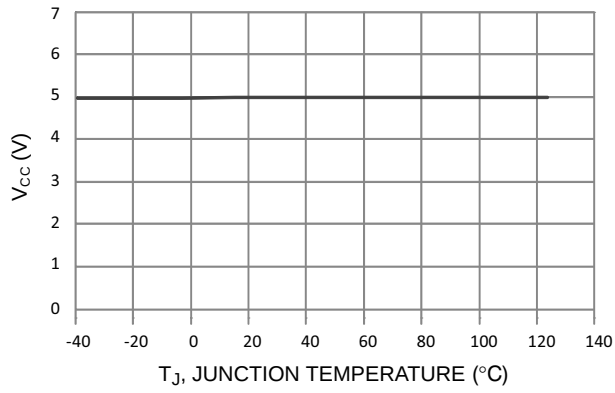


Figure 3. V<sub>CC</sub> vs. Temperature

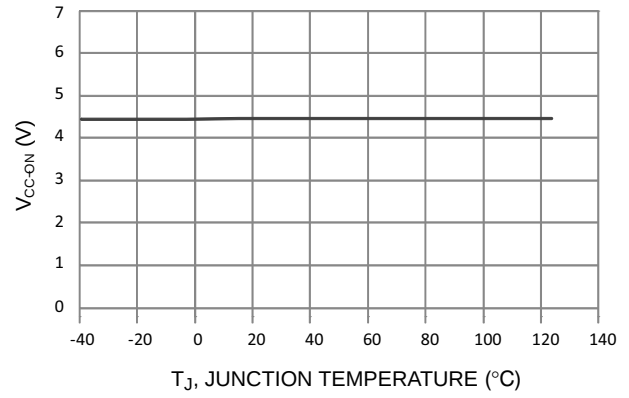


Figure 4. V<sub>CC-ON</sub> vs. Temperature

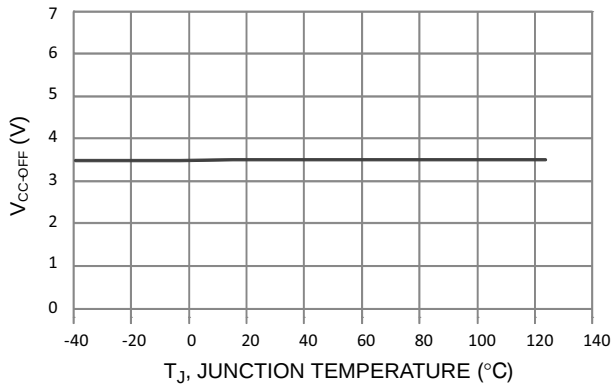


Figure 5. V<sub>CC-OFF</sub> vs. Temperature

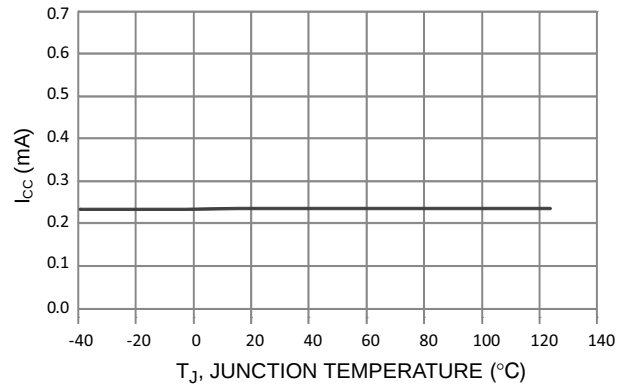


Figure 6. I<sub>CC</sub> vs. Temperature

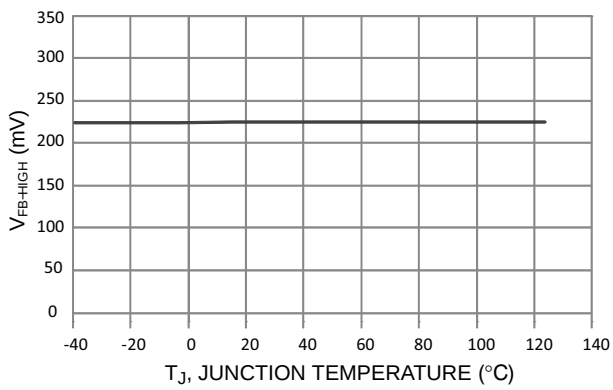


Figure 7. V<sub>FB-HIGH</sub> vs. Temperature

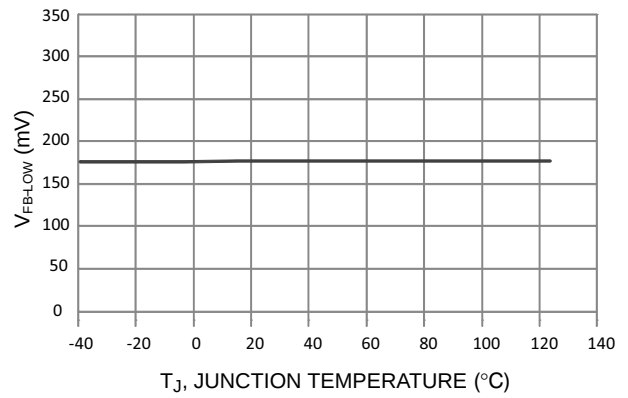
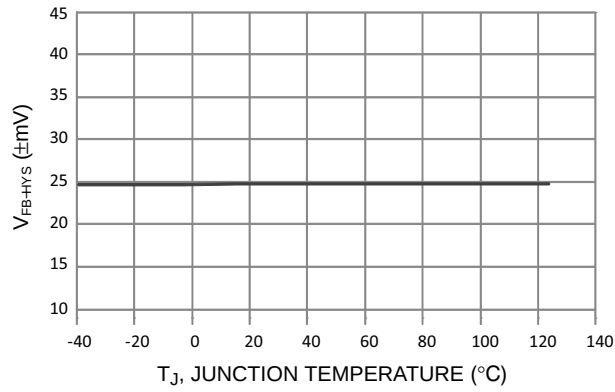
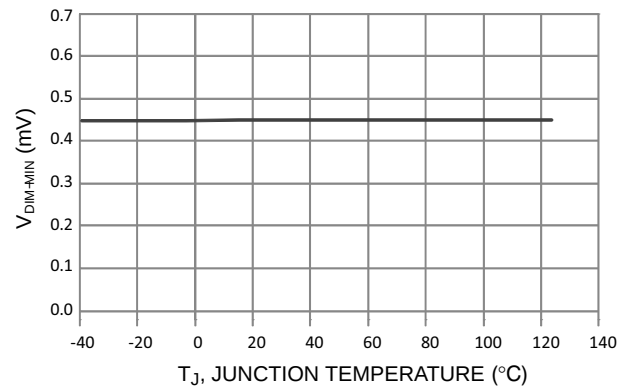
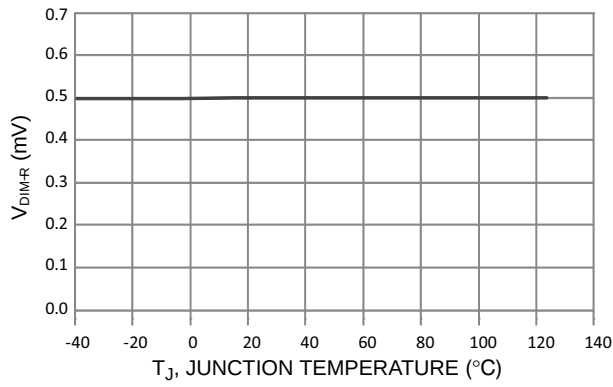
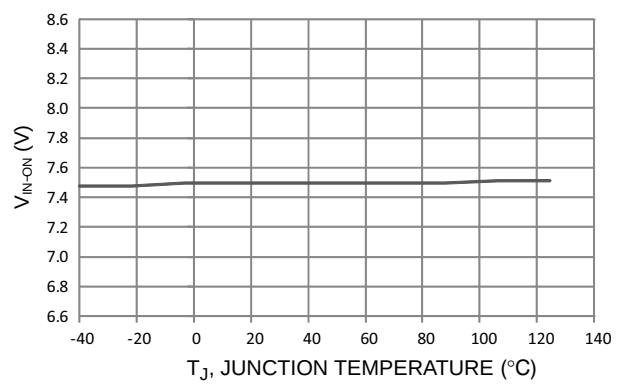
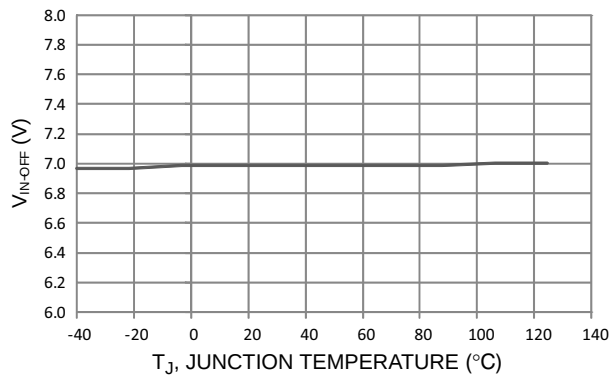
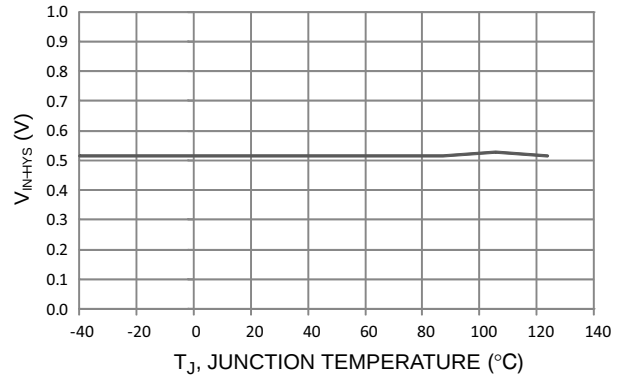


Figure 8. V<sub>FB-LOW</sub> vs. Temperature

## TYPICAL CHARACTERISTICS (Continued)

Figure 9. V<sub>FB-HYS</sub> vs. TemperatureFigure 10. V<sub>DIM-MIN</sub> vs. TemperatureFigure 11. V<sub>DIM-R</sub> vs. TemperatureFigure 12. V<sub>IN-ON</sub> vs. TemperatureFigure 13. V<sub>IN-OFF</sub> vs. TemperatureFigure 14. V<sub>IN-HYS</sub> vs. Temperature

## APPLICATION INFORMATION

## General

The FL7760 is a step down hysteretic LED current controller that is easily configured in varies input voltage range from 8 V to 70 V. The converter employs a high side current sensing resistor to detect and regulate the LED current. Analog, PWM and hybrid dimming can be easily implemented with single DIM pin. In addition, the time delay control operation can realize analog dimming less than 5%.

## Continuous Conduction Mode Regulation

The FL7760 employs hysteretic reference architecture that accurately regulates LED current by detecting an external high-side current-sense resistor voltage. The voltage across the current sensing resistor is kept measured and regulated in  $200\text{ mV} \pm 15\%$  range. This control scheme performs stable LED current regulation at input voltage and load transient conditions..

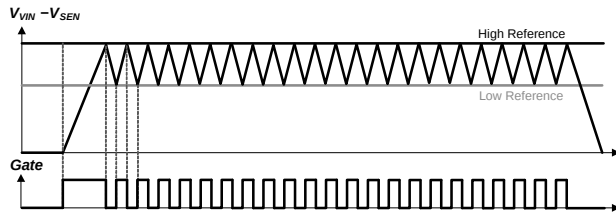


Figure 15. CCM Operation with Hysteresis

## VIN biasing at startup

Internal VIN biasing circuit quickly charges external VCC capacitor to begin IC operation. During the initial start-up, the VCC pin voltage gradually increases, and when the voltage reaches 4.5 V, the IC starts operating by VCC good signal.

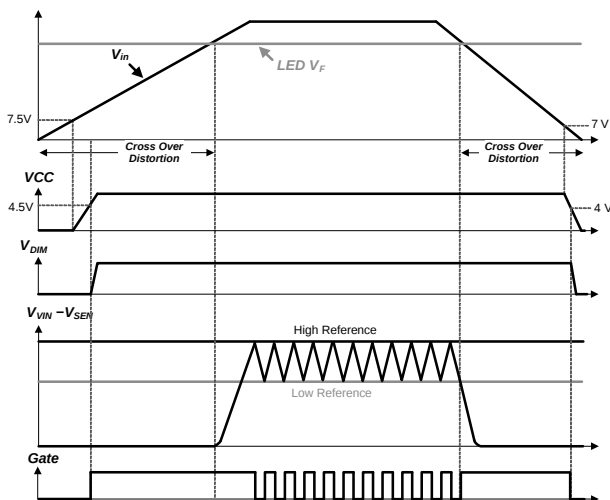


Figure 16. Start Up and Regulation

Thereafter, the internal current source in the DIM pin pulls up the DIM voltage and internal hysteresis reference is enabled with gate switching. Although the gate signal is

generated and the MOSFET is turned on, the LED current is still close to zero in the crossover distortion area where the input voltage is lower than the LED forward voltage.

## Soft Start

The hysteretic reference voltage to regulate LED current is proportional to DIM voltage. Internal current source [6 uA] charges an external capacitor connected at DIM pin and soft start time can be programmable with capacitances. Soft start time can be calculated as below equation.

$$T_{\text{SoftStart}} = \frac{C_{\text{DIM}} \times 3V}{6\mu A} \quad (\text{eq. 1})$$

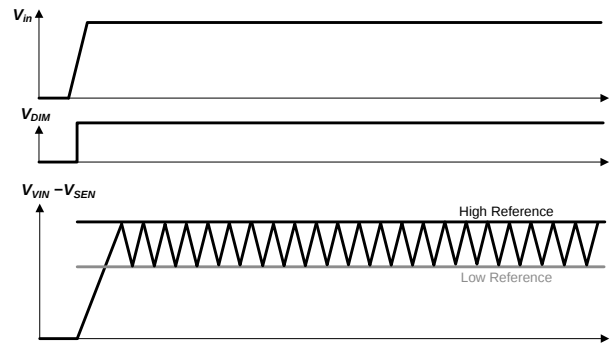


Figure 17. Soft Start with DIM pin Resistor

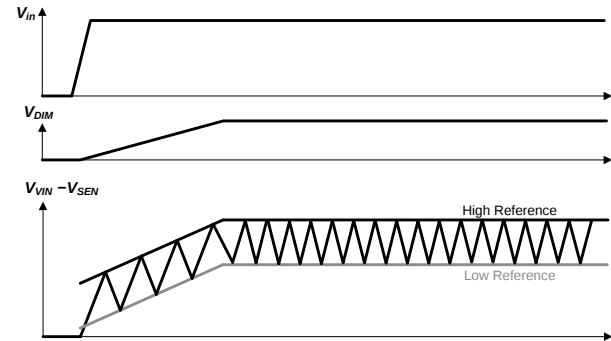


Figure 18. Soft Start with DIM pin Capacitor

Although soft start is not preferred, small filtering capacitor (~ hundreds pF) at DIM pin is recommended for noise immunity. PWM dimming signal delivered from an external PWM generator can be filtered by the capacitor, so the capacitor value needs to be carefully selected by considering an output impedance of PWM signal generator.

## Analog Dimming

When DIM voltage is higher than 3 V, hysteretic reference voltage is set to  $200\text{ mV} \pm 30\text{ mV}$ . This hysteretic reference condition limits LED current ripple spec of  $\pm 15\%$  without storage capacitor in parallel with the LED string.

The control range of the DIM pin in analog dimming is from 3 V to 0.5 V. As DIM voltage decreases, hysteretic

references are reduced accordingly with the fixed  $\pm 30$  mV hysteresis. To perform wide analog dimming range to less than 5%, the FL7760 has Time Delay Control (built in version A) with hysteresis control. In this delay control method, gate is not turned on during the delay time determined by DIM voltage once  $V_{VIN} - V_{SEN}$  reaches to the low reference. Therefore, operating mode is entered into DCM (Discontinuous Current Mode) that makes non-linear dimming curve in low DIM voltage range.

Therefore, for analog dimming application with wide dimming requirement, version A is recommended and for PWM dimming application with linear dimming curve, version B is preferred.

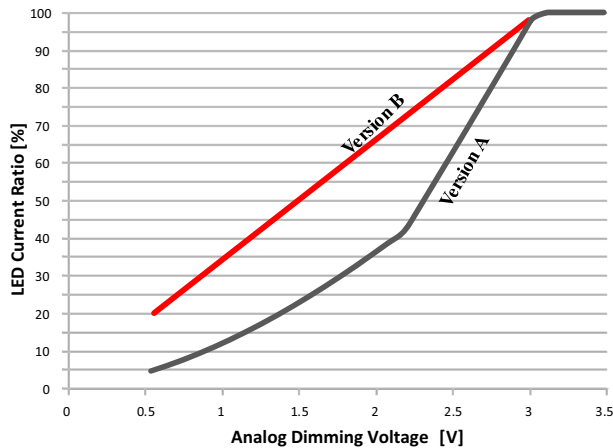


Figure 19. Analog Dimming Curve

#### PWM Dimming

If the DIM pin voltage is less than 0.45 V for 1  $\mu$ s blanking time, FL7760 stops switching. When the DIM voltage is up again over 0.5 V for the blanking time, switching begins. Based on the blanking time, the minimum duty ratio for PWM dimming can be calculated as 0.2% for a 2 kHz dimming signal.

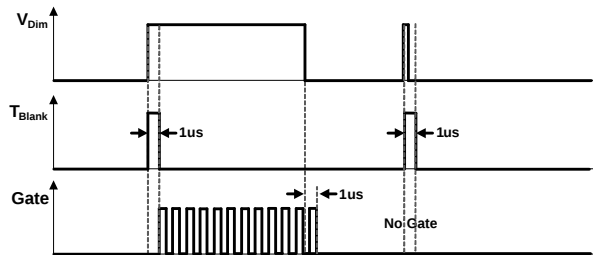


Figure 20. PWM Dimming

#### Hybrid Dimming

The FL7760 can implement hybrid dimming by adjusting amplitude and duty ratio of the single DIM signal provided

at DIM pin. It provides wide dimming range with good dimming linearity.

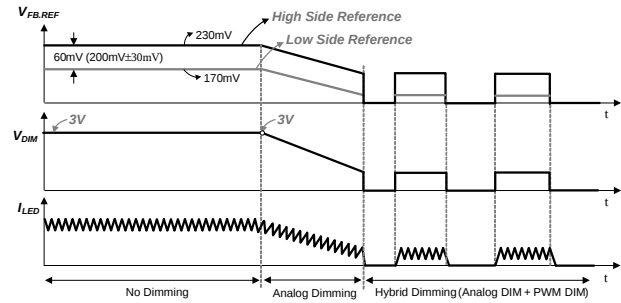


Figure 21. Hybrid Dimming

#### Standby Operation

When the voltage of the DIM pin falls below 0.45 V for 34 ms, standby mode is entered and the power consumption of the control circuitry is minimized. Standby mode is terminated once DIM voltage is over 0.5 V.

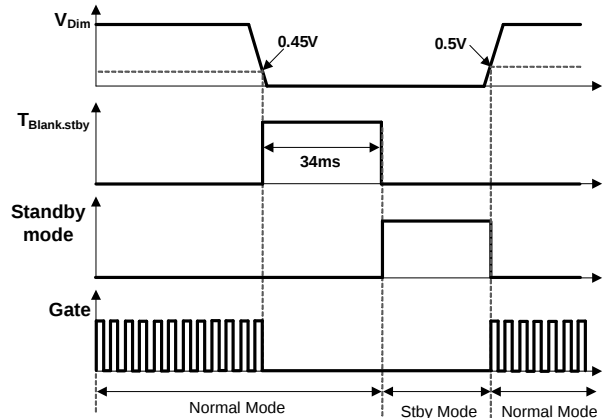


Figure 22. Standby Mode


#### Thermal Shut Down

If internal junction temperature is higher than 150°C, TSD protection is triggered and released with 30°C hysteresis.

#### Selection the Input Capacitor

A low ESR input capacitor reduces the surge current and switching noise drawn from the front end power supply. Ceramic capacitors (100 ~ 120 nF) closely connected to VIN and GND pin can be effective in bypassing switching noise generated from front-end power stage and FL7760 buck converter stage.

## Single layer PCB layout guidance

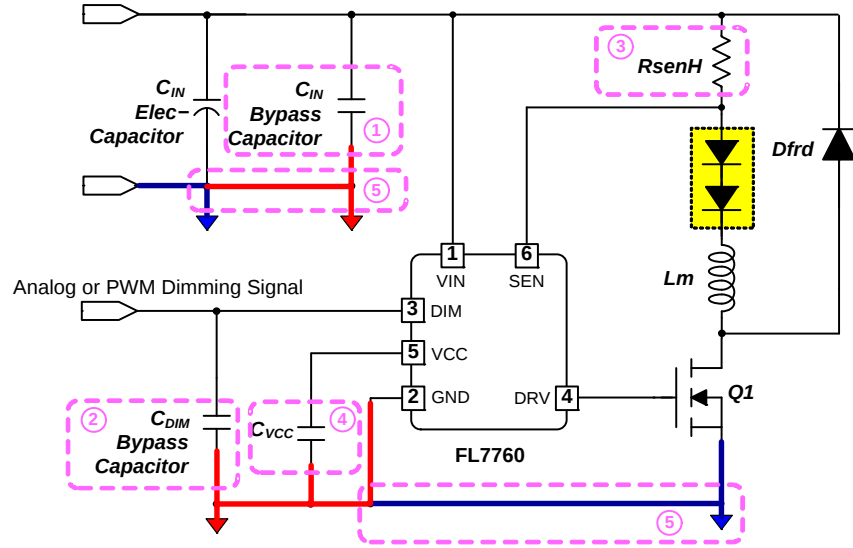

- ↓ PG (Power GND)  
 ↓ SG (Signal GND)
- ①  $C_{IN}$  bypass capacitor is closely connected to VIN and GND pins .
  - ②  $C_{DIM}$  bypass capacitor is closely connected to DIM and GND pins .
  - ③ Sensing resistor is connected close at VIN and SEN pins .
  - ④ VCC capacitor is connected close at VCC pin .
  - ⑤ SG and PG are combined and connected close at GND pin .


Figure 23. Single layer PCB layout guidance



SCALE 2:1

**SOT-23, 6 Lead**  
**CASE 527AJ**  
**ISSUE B**


DATE 29 FEB 2012

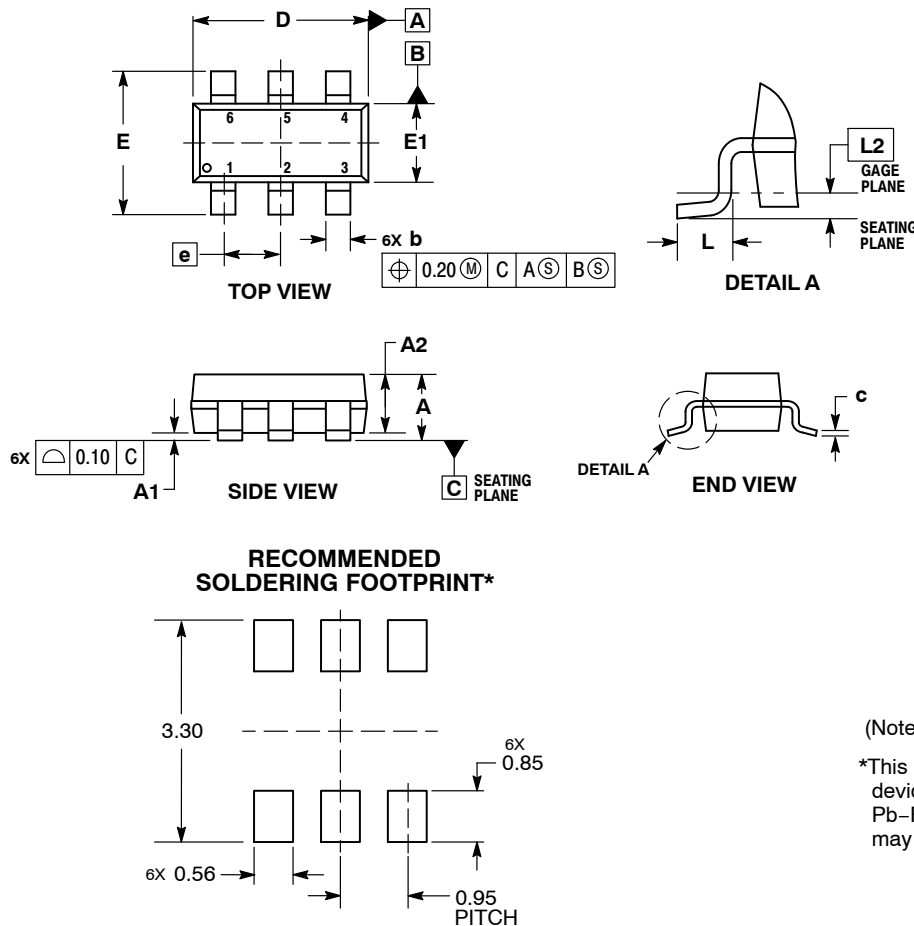

## NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DATUM C IS THE SEATING PLANE.

| MILLIMETERS |          |      |
|-------------|----------|------|
| DIM         | MIN      | MAX  |
| A           | ---      | 1.45 |
| A1          | 0.00     | 0.15 |
| A2          | 0.90     | 1.30 |
| b           | 0.20     | 0.50 |
| c           | 0.08     | 0.26 |
| D           | 2.70     | 3.00 |
| E           | 2.50     | 3.10 |
| E1          | 1.30     | 1.80 |
| e           | 0.95 BSC |      |
| L           | 0.20     | 0.60 |
| L2          | 0.25 BSC |      |

**GENERIC MARKING DIAGRAM\***


XXX = Specific Device Code  
M = Date Code  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present.

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

|                         |                       |                                                                                                                                                                                  |
|-------------------------|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98AON34321E</b>    | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>SOT-23, 6 LEAD</b> | <b>PAGE 1 OF 1</b>                                                                                                                                                               |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)