

# NPN Silicon Power Darlington Transistors

## MJB5742T4G

The Darlington transistors are designed for high-voltage power switching in inductive circuits.

### Features

- These Devices are Pb-Free and are RoHS Compliant

### Applications

- Small Engine Ignition
- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls

### MAXIMUM RATINGS

| Symbol            | Rating                                                                                 | Value       | Unit                     |
|-------------------|----------------------------------------------------------------------------------------|-------------|--------------------------|
| $V_{CEO(sus)}$    | Collector-Emitter Voltage                                                              | 400         | Vdc                      |
| $V_{CEV}$         | Collector-Emitter Voltage                                                              | 800         | Vdc                      |
| $V_{EB}$          | Emitter-Base Voltage                                                                   | 8           | Vdc                      |
| $I_C$<br>$I_{CM}$ | Collector Current – Continuous<br>– Peak (Note 1)                                      | 8<br>16     | Adc                      |
| $I_B$<br>$I_{BM}$ | Base Current – Continuous<br>– Peak (Note 1)                                           | 2.5<br>5    | Adc                      |
| $P_D$             | Total Device Dissipation @ $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | 2<br>0.016  | W<br>W/ $^\circ\text{C}$ |
| $P_D$             | Total Device Dissipation @ $T_C = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | 100<br>0.8  | W<br>W/ $^\circ\text{C}$ |
| $T_J, T_{stg}$    | Operating and Storage Junction<br>Temperature Range                                    | -65 to +150 | $^\circ\text{C}$         |


### THERMAL CHARACTERISTICS

| Symbol          | Characteristics                                                                 | Max  | Unit                      |
|-----------------|---------------------------------------------------------------------------------|------|---------------------------|
| $R_{\theta JC}$ | Thermal Resistance, Junction-to-Case                                            | 1.25 | $^\circ\text{C}/\text{W}$ |
| $R_{\theta JA}$ | Thermal Resistance, Junction-to-Ambient                                         | 62.5 | $^\circ\text{C}/\text{W}$ |
| $T_L$           | Maximum Lead Temperature for Soldering<br>Purposes 1/8" from Case for 5 Seconds | 275  | $^\circ\text{C}$          |



Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Pulse Test: Pulse Width = 5 ms, Duty Cycle  $\leq 10\%$ .


## POWER DARLINGTON TRANSISTORS 8 AMPERES, 400 VOLTS 100 WATTS



D<sup>2</sup>PAK  
CASE 418B  
STYLE 1



### MARKING DIAGRAM



B5742 = Specific Device Code  
A = Assembly Location  
Y = Year  
WW = Work Week  
G = Pb-Free Package

### ORDERING INFORMATION

| Device     | Package                         | Shipping <sup>†</sup> |
|------------|---------------------------------|-----------------------|
| MJB5742T4G | D <sup>2</sup> PAK<br>(Pb-Free) | 800 / Tape & Reel     |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, [BRD8011/D](#).

# MJB5742T4G

## ELECTRICAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$ unless otherwise noted)

| Symbol | Characteristic | Min | Typ | Max | Unit |
|--------|----------------|-----|-----|-----|------|
|--------|----------------|-----|-----|-----|------|

### OFF CHARACTERISTICS (Note 2)

|                |                                                                                                                                                                                                 |        |        |        |      |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------|--------|------|
| $V_{CEO(sus)}$ | Collector–Emitter Sustaining Voltage ( $I_C = 50\text{ mA}$ , $I_B = 0$ )                                                                                                                       | 400    | –      | –      | Vdc  |
| $I_{CEV}$      | Collector Cutoff Current ( $V_{CEV} = \text{Rated Value}$ , $V_{BE(off)} = 1.5\text{ Vdc}$ )<br>( $V_{CEV} = \text{Rated Value}$ , $V_{BE(off)} = 1.5\text{ Vdc}$ , $T_C = 100^\circ\text{C}$ ) | –<br>– | –<br>– | 1<br>5 | mAdc |
| $I_{EBO}$      | Emitter Cutoff Current ( $V_{EB} = 8\text{ Vdc}$ , $I_C = 0$ )                                                                                                                                  | –      | –      | 75     | mAdc |

### SECOND BREAKDOWN

|           |                                                             |              |  |  |  |
|-----------|-------------------------------------------------------------|--------------|--|--|--|
| $I_{S/b}$ | Second Breakdown Collector Current with Base Forward Biased | See Figure 6 |  |  |  |
| RBSOA     | Clamped Inductive SOA with Base Reverse Biased              | See Figure 7 |  |  |  |

### ON CHARACTERISTICS (Note 2)

|               |                                                                                                                                                                                                                              |             |             |                   |     |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------|-------------------|-----|
| $h_{FE}$      | DC Current Gain ( $I_C = 0.5\text{ Adc}$ , $V_{CE} = 5\text{ Vdc}$ )<br>( $I_C = 4\text{ Adc}$ , $V_{CE} = 5\text{ Vdc}$ )                                                                                                   | 50<br>200   | 100<br>400  | –<br>–            | –   |
| $V_{CE(sat)}$ | Collector–Emitter Saturation Voltage ( $I_C = 4\text{ Adc}$ , $I_B = 0.2\text{ Adc}$ )<br>( $I_C = 8\text{ Adc}$ , $I_B = 0.4\text{ Adc}$ )<br>( $I_C = 4\text{ Adc}$ , $I_B = 0.2\text{ Adc}$ , $T_C = 100^\circ\text{C}$ ) | –<br>–<br>– | –<br>–<br>– | 2<br>3<br>2.2     | Vdc |
| $V_{BE(sat)}$ | Base–Emitter Saturation Voltage ( $I_C = 4\text{ Adc}$ , $I_B = 0.2\text{ Adc}$ )<br>( $I_C = 8\text{ Adc}$ , $I_B = 0.4\text{ Adc}$ )<br>( $I_C = 4\text{ Adc}$ , $I_B = 0.2\text{ Adc}$ , $T_C = 100^\circ\text{C}$ )      | –<br>–<br>– | –<br>–<br>– | 2.5<br>3.5<br>2.4 | Vdc |
| $V_f$         | Diode Forward Voltage (Note 3) ( $I_F = 5\text{ Adc}$ )                                                                                                                                                                      | –           | –           | 2.5               | Vdc |

### SWITCHING CHARACTERISTICS

| Typical Resistive Load (Table 1)  |                      |                                                                                                                                                 |   |      |   |    |
|-----------------------------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---|------|---|----|
| t <sub>d</sub>                    | Delay Time           | (V <sub>CC</sub> = 250 Vdc, I <sub>C(pk)</sub> = 6 A<br>I <sub>B1</sub> = I <sub>B2</sub> = 0.25 A, t <sub>p</sub> = 25 μs,<br>Duty Cycle ≤ 1%) | – | 0.04 | – | μs |
| t <sub>r</sub>                    | Rise Time            |                                                                                                                                                 | – | 0.5  | – | μs |
| t <sub>s</sub>                    | Storage Time         |                                                                                                                                                 | – | 8    | – | μs |
| t <sub>f</sub>                    | Fall Time            |                                                                                                                                                 | – | 2    | – | μs |
| Inductive Load, Clamped (Table 1) |                      |                                                                                                                                                 |   |      |   |    |
| t <sub>sv</sub>                   | Voltage Storage Time | (I <sub>C(pk)</sub> = 6 A, V <sub>CE(pk)</sub> = 250 Vdc<br>I <sub>B1</sub> = 0.06 A, V <sub>BE(off)</sub> = 5 Vdc)                             | – | 4    | – | μs |
| t <sub>c</sub>                    | Crossover Time       |                                                                                                                                                 | – | 2    | – | μs |

2. Pulse Test: Pulse Width 300  $\mu\text{s}$ , Duty Cycle = 2%.

3. The internal Collector–to–Emitter diode can eliminate the need for an external diode to clamp inductive loads. Tests have shown that the Forward Recovery Voltage ( $V_f$ ) of this diode is comparable to that of typical fast recovery rectifiers.



TYPICAL CHARACTERISTICS

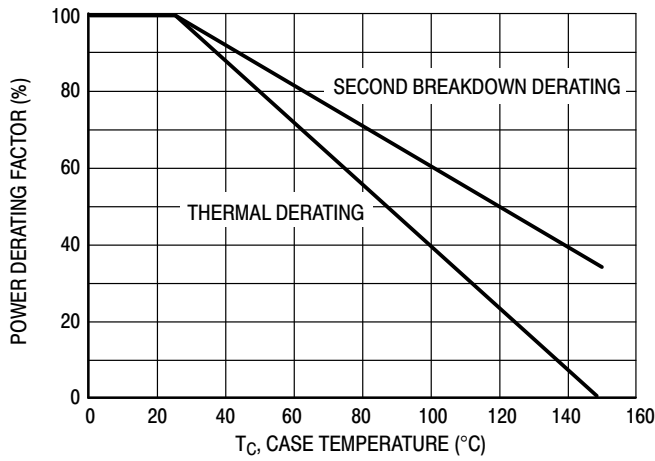


Figure 1. Power Derating

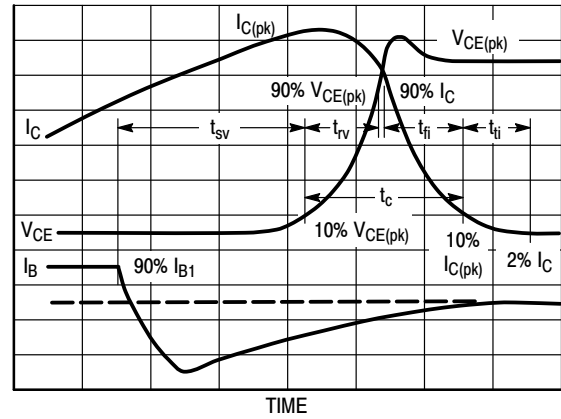


Figure 2. Inductive Switching Measurements

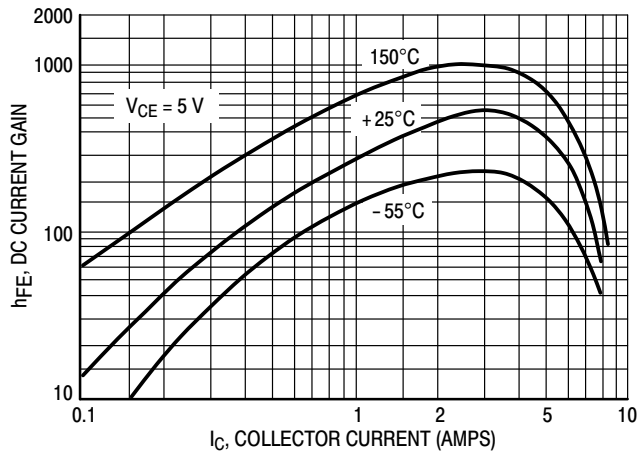


Figure 3. DC Current Gain

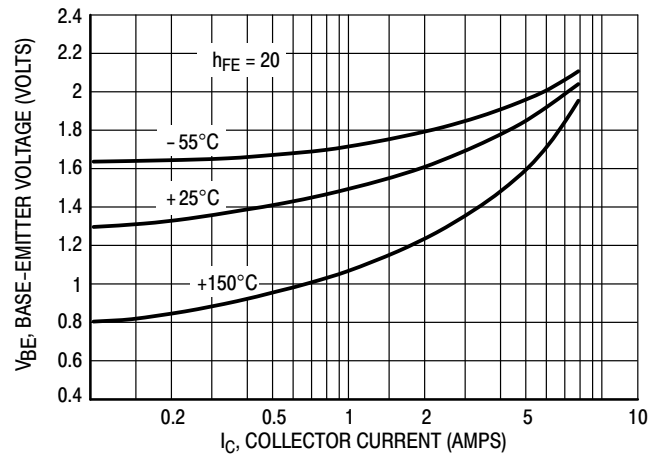


Figure 4. Base-Emitter Voltage

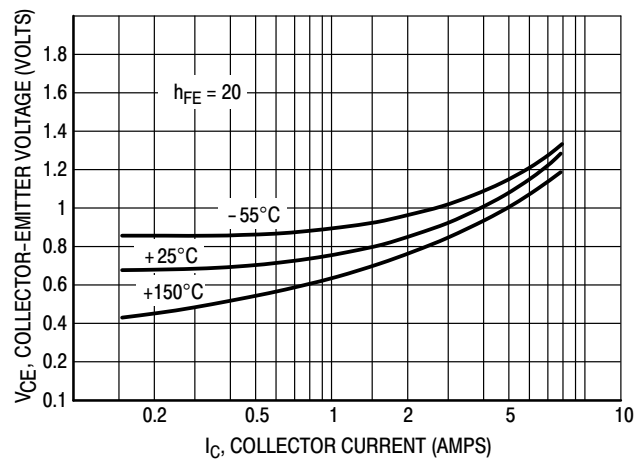
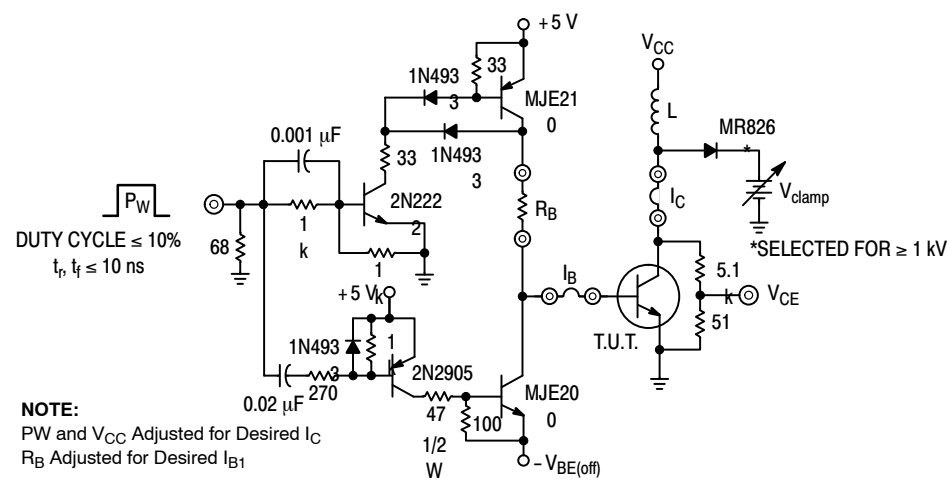

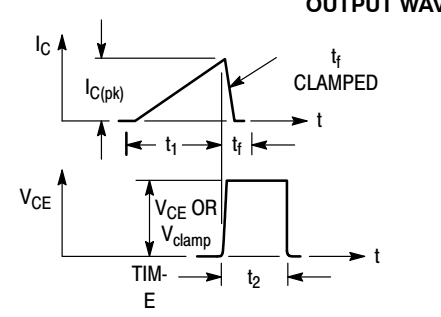



Figure 5. Collector-Emitter Saturation Voltage

# MJB5742T4G

Table 1. Test Conditions for Dynamic Performance

| REVERSE BIAS SAFE OPERATING AREA AND INDUCTIVE SWITCHING |                                                                                                                                                                                                                                                                                                                                                                     |  | RESISTIVE SWITCHING                                                                                                                                                                                                                                           |
|----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TEST CIRCUITS                                            |  <p>DUTY CYCLE <math>\leq 10\%</math><br/><math>t_r, t_f \leq 10 \text{ ns}</math></p> <p>NOTE:<br/>PW and <math>V_{CC}</math> Adjusted for Desired <math>I_C</math><br/><math>R_B</math> Adjusted for Desired <math>I_{B1}</math></p>                                            |  |                                                                                                                                                                            |
| CIRCUIT VALUES                                           | <p>COIL DATA:<br/>FERROXCUBE CORE #6656<br/>FULL BOBBIN (~16 TURNS) #16</p> <p>GAP FOR 200 <math>\mu\text{H}/20 \text{ A}</math><br/><math>L_{\text{coil}} = 200 \mu\text{H}</math></p> <p><math>V_{CC} = 30 \text{ V}</math><br/><math>V_{CE(pk)} = 250 \text{ Vdc}</math><br/><math>I_{C(pk)} = 6 \text{ A}</math></p>                                            |  | <p><math>V_{CC} = 250 \text{ V}</math><br/><math>D1 = 1N5820 \text{ OR EQUIV.}</math></p>                                                                                                                                                                     |
| TEST WAVEFORMS                                           | <p>OUTPUT WAVEFORMS</p>  <p><math>t_1</math> ADJUSTED TO OBTAIN <math>I_C</math></p> $t_1 \approx \frac{L_{\text{coil}} (I_{C(pk)})}{V_{CC}}$ $t_2 \approx \frac{L_{\text{coil}} (I_{C(pk)})}{V_{\text{clamp}}}$ <p>TEST EQUIPMENT<br/>SCOPE-TEKTRONICS<br/>475 OR EQUIVALENT</p> |  |  <p><math>t_r, t_f &lt; 10 \text{ ns}</math><br/>DUTY CYCLE = 1%<br/><math>R_B</math> AND <math>R_C</math> ADJUSTED FOR DESIRED <math>I_B</math> AND <math>I_C</math></p> |

## SAFE OPERATING AREA INFORMATION

### FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate  $I_C - V_{CE}$  limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 6 is based on  $T_C = 25^\circ\text{C}$ ;  $T_{J(pk)}$  is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when  $T_C \geq 25^\circ\text{C}$ . Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 6 may be found at any case temperature by using the appropriate curve on Figure 1.

The Safe Operating Area figures shown in Figures 6 and 7 are specified ratings for these devices under the test conditions shown.

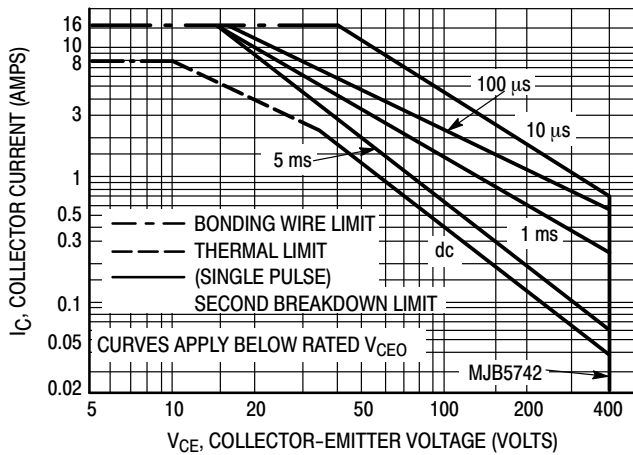


Figure 6. Forward Bias Safe Operating Area

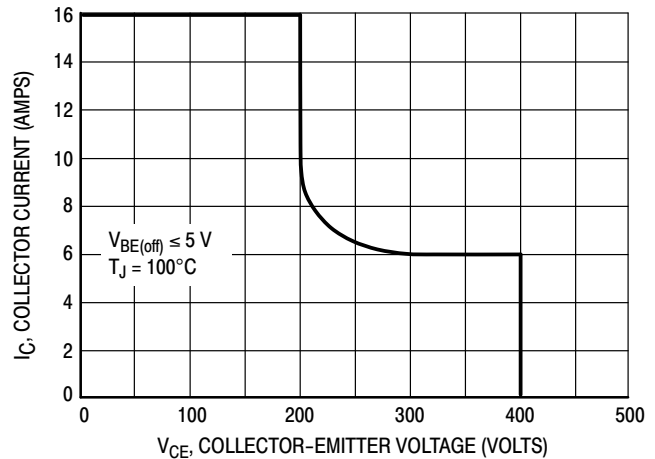


Figure 7. Reverse Bias Safe Operating Area

## RESISTIVE SWITCHING PERFORMANCE

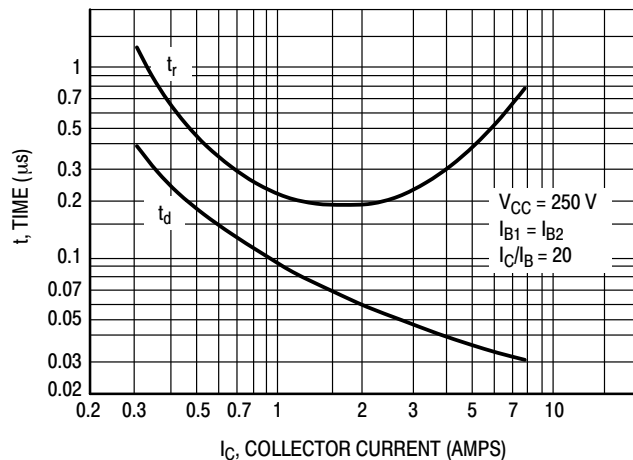


Figure 8. Turn-On Time


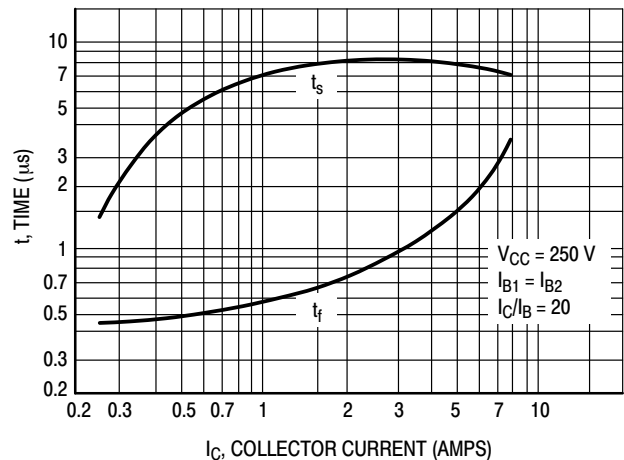



Figure 9. Turn-Off Time



D<sup>2</sup>PAK 3  
CASE 418B-04  
ISSUE L

DATE 17 FEB 2015

SCALE 1:1

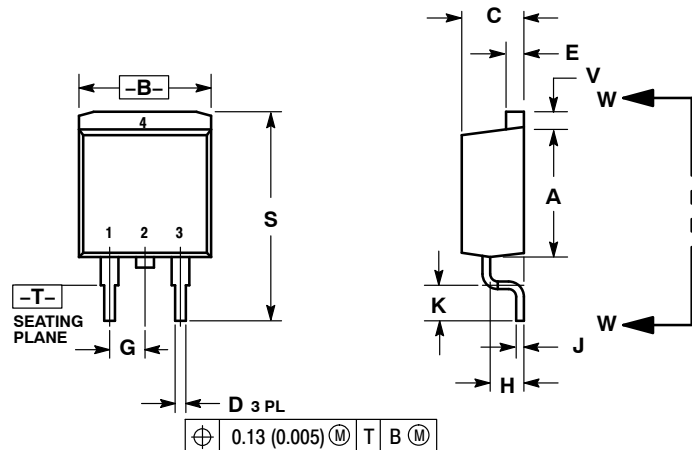


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. 418B-01 THRU 418B-03 OBSOLETE, NEW STANDARD 418B-04.

| DIM | INCHES |       | MILLIMETERS |       |
|-----|--------|-------|-------------|-------|
|     | MIN    | MAX   | MIN         | MAX   |
| A   | 0.340  | 0.380 | 8.64        | 9.65  |
| B   | 0.380  | 0.405 | 9.65        | 10.29 |
| C   | 0.160  | 0.190 | 4.06        | 4.83  |
| D   | 0.020  | 0.035 | 0.51        | 0.89  |
| E   | 0.045  | 0.055 | 1.14        | 1.40  |
| F   | 0.310  | 0.350 | 7.87        | 8.89  |
| G   | 0.100  | BSC   | 2.54        | BSC   |
| H   | 0.080  | 0.110 | 2.03        | 2.79  |
| J   | 0.018  | 0.025 | 0.46        | 0.64  |
| K   | 0.090  | 0.110 | 2.29        | 2.79  |
| L   | 0.052  | 0.072 | 1.32        | 1.83  |
| M   | 0.280  | 0.320 | 7.11        | 8.13  |
| N   | 0.197  | REF   | 5.00        | REF   |
| P   | 0.079  | REF   | 2.00        | REF   |
| R   | 0.039  | REF   | 0.99        | REF   |
| S   | 0.575  | 0.625 | 14.60       | 15.88 |
| V   | 0.045  | 0.055 | 1.14        | 1.40  |

VARIABLE  
CONFIGURATION  
ZONE

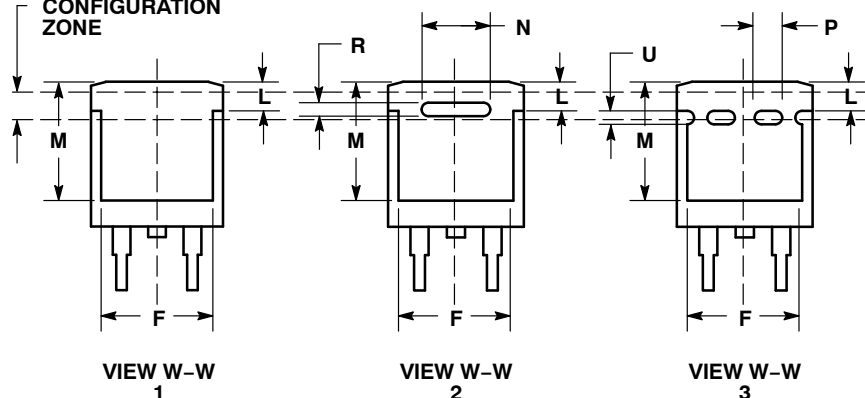

STYLE 1:

- PIN 1. BASE  
2. COLLECTOR  
3. EMITTER  
4. COLLECTOR

STYLE 2:

- PIN 1. GATE  
2. DRAIN  
3. SOURCE  
4. DRAIN

STYLE 3:

- PIN 1. ANODE  
2. CATHODE  
3. ANODE  
4. CATHODE

STYLE 4:

- PIN 1. GATE  
2. COLLECTOR  
3. EMITTER  
4. COLLECTOR

STYLE 5:

- PIN 1. CATHODE  
2. ANODE  
3. CATHODE  
4. ANODE

STYLE 6:

- PIN 1. NO CONNECT  
2. CATHODE  
3. ANODE  
4. CATHODE

MARKING INFORMATION AND FOOTPRINT ON PAGE 2


|                  |                      |                                                                                                                                                                                     |
|------------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98ASB42761B          | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | D <sup>2</sup> PAK 3 | PAGE 1 OF 2                                                                                                                                                                         |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**D<sup>2</sup>PAK 3**  
CASE 418B-04  
ISSUE L

DATE 17 FEB 2015


**GENERIC  
MARKING DIAGRAM\***

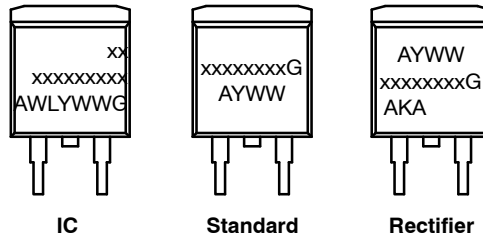

xx = Specific Device Code  
A = Assembly Location  
WL = Wafer Lot  
Y = Year  
WW = Work Week  
G = Pb-Free Package  
AKA = Polarity Indicator

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

**SOLDERING FOOTPRINT\***

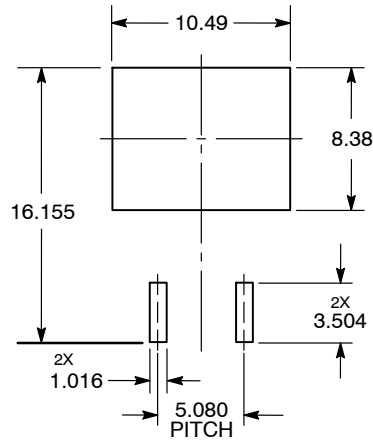

DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

|                         |                           |                                                                                                                                                                                     |
|-------------------------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98ASB42761B</b>        | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>D<sup>2</sup>PAK 3</b> | <b>PAGE 2 OF 2</b>                                                                                                                                                                  |

**onsemi** and **Onsemi** are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)