

# Advanced Load Management Switch

## FPF1504 / FPF1504L

### Description

The FPF1504/FPF1504L are low- $R_{DS}$  P-channel MOSFET load switches of the IntelliMAX™ family. Integrated slew-rate control prevents excessive inrush current from the supply rails with capacitive loads common in power applications. In addition, the FPF1504/FPF1504L feature output discharge capability.

The input voltage range operates from 1.0 V to 3.6 V to fulfill today's mobile device supply requirements. Switch control is by a logic input (ON pin) capable of interfacing directly with low-voltage CMOS control signals and GPIOs in embedded processors.

### Features

- 1.0 V to 3.6 V Input Voltage Operating Range
- Typical  $R_{DS(ON)}$ :
  - ◆ 15 m $\Omega$  at  $V_{IN} = 3.3$  V
  - ◆ 20 m $\Omega$  at  $V_{IN} = 1.8$  V
  - ◆ 40 m $\Omega$  at  $V_{IN} = 1.0$  V
- Slew Rate Control
- Output Discharge Function
- Low <1  $\mu$ A Quiescent Current at  $V_{ON} = V_{IN}$
- ESD Protected: 4000 V HBM, 2000 V CDM
- GPIO/CMOS-Compatible Enable Circuitry
- Active HIGH and active LOW versions

### Applications

- Mobile Devices and Smart Phones
- Portable Media Devices
- Digital Cameras
- Advanced Notebook, UMPC, and MID
- Portable Medical Devices
- GPS and Navigation Equipment


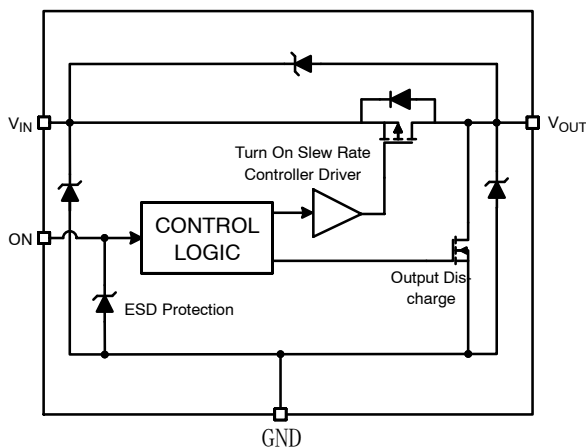


Figure 1. Block Diagram



WLCSP4  
CASE 567RH

### MARKING DIAGRAM



|    |                                                   |
|----|---------------------------------------------------|
| G  | = 1 <sup>st</sup> Digit of 2 Digit Device ID Mark |
| &K | = 2-Digits Lot Run Traceability Code              |
| 4  | = 2 <sup>nd</sup> Digit of 2 Digit Device ID Mark |
| &2 | = 2-digit Date Code Format                        |
| &. | = Pin 1 Identifier                                |
| &E | = Space Designator                                |
| &Z | = Assembly Plant Code                             |


### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

## ORDERING INFORMATION

| Part Number  | Top Mark | Switch (Typical)<br>At 1.8 V <sub>IN</sub> | Input Buffer | Output<br>Discharge | ON Pin<br>Activity | Package                                            |
|--------------|----------|--------------------------------------------|--------------|---------------------|--------------------|----------------------------------------------------|
| FPF1504UCX   | G4       | 20 mΩ                                      | CMOS         | YES                 | Active HIGH        | 4-Ball, WLCSP, 0.5 mm Pitch                        |
| FPF1504BUCX  | G4       | 20 mΩ                                      | CMOS         | YES                 | Active HIGH        | 4-Ball, WLCSP with Backside Laminate, 0.5 mm Pitch |
| FPF1504LUCX  | GZ       | 20 mΩ                                      | CMOS         | YES                 | Active LOW         | 4-Ball, WLCSP, 0.5 mm Pitch                        |
| FPF1504LBUCX | GZ       | 20 mΩ                                      | CMOS         | YES                 | Active LOW         | 4-Ball, WLCSP with Backside Laminate, 0.5 mm Pitch |

## Application Diagram

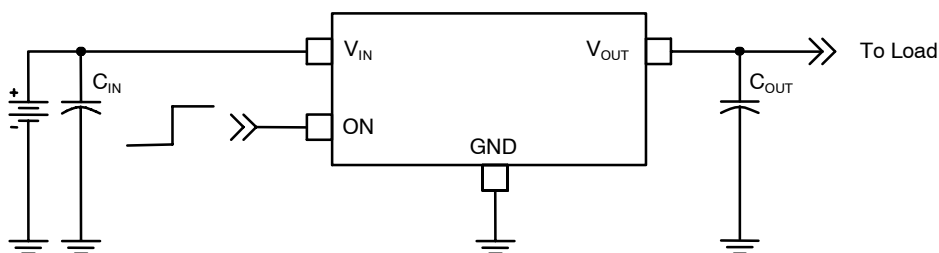

- NOTES: 1. C<sub>IN</sub> = 1 μF, X5R, 0603, for example Murata GRM185R60J105KE26.  
2. C<sub>OUT</sub> = 1 μF, X5R, 0805, for example Murata GRM216R61A105KA01.

Figure 2. Typical Application

## Pin Configurations



Figure 3. 1 x 1 mm WLCSP Bumps Facing Down




Figure 4. 1 x 1 mm WLCSP Bumps Facing Up

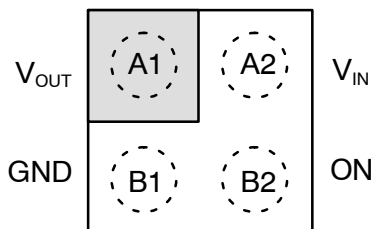


Figure 5. Pin Assignments (Top View)

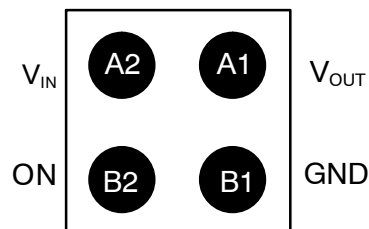


Figure 6. Pin Assignments (Bottom View)

## PIN DEFINITIONS

| Pin # | Name             | Description                             |
|-------|------------------|-----------------------------------------|
| A1    | V <sub>OUT</sub> | Switch Output                           |
| A2    | V <sub>IN</sub>  | Supply Input; Input to the Power Switch |
| B1    | GND              | Ground                                  |
| B2    | ON               | ON/OFF Control                          |

## ABSOLUTE MAXIMUM RATINGS

| Symbol           | Parameter                                                   |                                   | Min. | Max. | Unit |
|------------------|-------------------------------------------------------------|-----------------------------------|------|------|------|
| V <sub>IN</sub>  | V <sub>IN</sub> , V <sub>OUT</sub> , V <sub>ON</sub> to GND |                                   | -0.3 | 4.0  | V    |
| I <sub>SW</sub>  | Maximum Continuous Switch Current                           |                                   |      | 1.5  | A    |
| P <sub>D</sub>   | Power Dissipation at T <sub>A</sub> = 25°C                  |                                   |      | 1.0  | W    |
| T <sub>STG</sub> | Storage Junction Temperature                                |                                   | -65  | +150 | °C   |
| T <sub>A</sub>   | Operating Temperature Range                                 |                                   | -40  | +85  | °C   |
| θ <sub>JA</sub>  | Thermal Resistance, Junction-to-Ambient                     | 1S2P with 1 Thermal Via           |      | 95   | °C/W |
|                  |                                                             | 1S2P without Thermal Via          |      | 187  |      |
| ESD              | Electrostatic Discharge Capability                          | Human Body Model, JESD22-A114     | 4    |      | kV   |
|                  |                                                             | Charged Device Model, JESD22-C101 | 2    |      |      |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

## RECOMMENDED OPERATING CONDITIONS

| Symbol          | Parameter                     | Min. | Max. | Unit |
|-----------------|-------------------------------|------|------|------|
| V <sub>IN</sub> | Supply Voltage                | 1.0  | 3.6  | V    |
| T <sub>A</sub>  | Ambient Operating Temperature | -40  | +85  | °C   |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

# FPF1504 / FPF1504L

## ELECTRICAL CHARACTERISTICS

Unless otherwise noted,  $V_{IN} = 1.0$  to  $3.6$  V,  $T_A = -40$  to  $+85^\circ\text{C}$ ; Typical Values are at  $V_{IN} = 3.3$  V and  $T_A = 25^\circ\text{C}$ .

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Units |
|--------|-----------|------------|------|------|------|-------|
|--------|-----------|------------|------|------|------|-------|

### BASIC OPERATION

|               |                                       |          |                                                                                             |     |      |     |                  |
|---------------|---------------------------------------|----------|---------------------------------------------------------------------------------------------|-----|------|-----|------------------|
| $V_{IN}$      | Supply Voltage                        |          |                                                                                             | 1.0 |      | 3.6 | V                |
| $I_{Q(OFF)}$  | Off Supply Current                    | FPF1504  | $V_{ON} = \text{GND}, V_{OUT} = \text{Open}$                                                |     | 0.25 |     | $\mu\text{A}$    |
|               |                                       | FPF1504L | $V_{ON} = V_{IN}, V_{OUT} = \text{Open}$                                                    |     | 0.3  |     |                  |
| $I_{SD(OFF)}$ | Off Switch Current                    | FPF1504  | $V_{ON} = \text{GND}, V_{OUT} = \text{GND}$                                                 |     | 0.25 |     |                  |
|               |                                       | FPF1504L | $V_{ON} = V_{IN}, V_{OUT} = \text{GND}$                                                     |     | 0.3  |     |                  |
| $I_Q$         | Quiescent Current                     | FPF1504  | $I_{OUT} = 0 \text{ mA}, V_{IN} = 3.6 \text{ V}, V_{ON} = V_{IN}$                           |     | 0.08 |     |                  |
|               |                                       |          | $I_{OUT} = 0 \text{ mA}, V_{ON} = V_{IH(MIN)}$                                              |     | 0.75 |     |                  |
|               |                                       | FPF1504L | $I_{OUT} = 0 \text{ mA}, V_{IN} = 3.6 \text{ V}, V_{ON} = \text{GND}$                       |     | 0.08 |     |                  |
|               |                                       |          | $I_{OUT} = 0 \text{ mA}, V_{ON} = V_{IL(MAX)}$                                              |     | 0.95 |     |                  |
| $R_{ON}$      | On Resistance                         |          | $V_{IN} = 3.3 \text{ V}, I_{OUT} = 200 \text{ mA}, T_A = 25^\circ\text{C}$                  |     | 15   | 30  | $\text{m}\Omega$ |
|               |                                       |          | $V_{IN} = 1.8 \text{ V}, I_{OUT} = 200 \text{ mA}, T_A = 25^\circ\text{C}$                  |     | 20   | 40  |                  |
|               |                                       |          | $V_{IN} = 1.5 \text{ V}, I_{OUT} = 200 \text{ mA}, T_A = 25^\circ\text{C}$                  |     | 30   |     |                  |
|               |                                       |          | $V_{IN} = 1.0 \text{ V}, I_{OUT} = 200 \text{ mA}, T_A = 25^\circ\text{C}$                  |     | 40   | 80  |                  |
|               |                                       |          | $V_{IN} = 1.8 \text{ V}, I_{OUT} = 200 \text{ mA}, T_A = 85^\circ\text{C} \text{ (Note 3)}$ |     | 35   | 50  |                  |
| $R_{PD}$      | Output Discharge Pull-Down Resistance |          | $V_{ON} = 0 \text{ V or } V_{IN}, I_{OUT} = -20 \text{ mA}$                                 |     | 65   | 95  | $\Omega$         |
| $V_{IH}$      | On Input Logic High Voltage           | FPF1504  |                                                                                             | 0.8 |      |     | V                |
| $V_{IL}$      | On Input Logic Low Voltage            | FPF1504  |                                                                                             |     |      | 0.3 |                  |
| $I_{ON}$      | On Input Leakage                      |          | $V_{ON} = V_{IN} \text{ or } \text{GND}$                                                    |     |      | 1   | $\mu\text{A}$    |

### DYNAMIC CHARACTERISTICS

|            |                              |          |                                                                                           |  |     |     |               |
|------------|------------------------------|----------|-------------------------------------------------------------------------------------------|--|-----|-----|---------------|
| $t_{DON}$  | Turn-On Delay (Note 4)       | FPF1504  | $R_L = 10 \Omega, C_L = 0.1 \mu\text{F}, V_{IN} = 3.3 \text{ V}, T_A = 25^\circ\text{C}$  |  | 80  |     | $\mu\text{s}$ |
| $t_R$      | $V_{OUT}$ Rise Time (Note 4) | FPF1504  |                                                                                           |  | 130 |     |               |
| $t_{ON}$   | Turn-On Time (Note 4)        | FPF1504  |                                                                                           |  | 210 |     |               |
| $t_{DON}$  | Turn-On Delay (Note 4)       | FPF1504  | $R_L = 500 \Omega, C_L = 0.1 \mu\text{F}, V_{IN} = 3.3 \text{ V}, T_A = 25^\circ\text{C}$ |  | 70  | 100 | $\mu\text{s}$ |
|            |                              | FPF1504L |                                                                                           |  | 95  |     |               |
| $t_R$      | $V_{OUT}$ Rise Time (Note 4) | FPF1504  |                                                                                           |  | 110 | 150 |               |
|            |                              | FPF1504L |                                                                                           |  | 115 |     |               |
| $t_{ON}$   | Turn-On Time (Note 4)        | FPF1504  |                                                                                           |  | 180 | 250 |               |
|            |                              | FPF1504L |                                                                                           |  | 210 |     |               |
| $t_{DOFF}$ | Turn-Off Delay (Note 4)      | FPF1504  | $R_L = 10 \Omega, C_L = 0.1 \mu\text{F}, V_{IN} = 3.3 \text{ V}, T_A = 25^\circ\text{C}$  |  | 25  | 30  | $\mu\text{s}$ |
| $t_F$      | $V_{OUT}$ Fall Time (Note 4) | FPF1504  |                                                                                           |  | 2   |     |               |
| $t_{OFF}$  | Turn-Off Time (Note 4)       | FPF1504  |                                                                                           |  | 27  |     |               |

# FPF1504 / FPF1504L

## ELECTRICAL CHARACTERISTICS (continued)

Unless otherwise noted,  $V_{IN} = 1.0$  to  $3.6$  V,  $T_A = -40$  to  $+85^\circ\text{C}$ ; Typical Values are at  $V_{IN} = 3.3$  V and  $T_A = 25^\circ\text{C}$ .

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Units |
|--------|-----------|------------|------|------|------|-------|
|--------|-----------|------------|------|------|------|-------|

### DYNAMIC CHARACTERISTICS

|            |                                 |          |                                                                                                         |  |    |  |               |
|------------|---------------------------------|----------|---------------------------------------------------------------------------------------------------------|--|----|--|---------------|
| $t_{DOFF}$ | Turn-Off Delay<br>(Note 4)      | FPF1504  | $R_L = 500\ \Omega$ , $C_L = 0.1\ \mu\text{F}$ ,<br>$V_{IN} = 3.3\ \text{V}$ , $T_A = 25^\circ\text{C}$ |  | 25 |  | $\mu\text{s}$ |
|            |                                 | FPF1504L |                                                                                                         |  | 2  |  |               |
| $t_F$      | $V_{OUT}$ Fall Time<br>(Note 4) | FPF1504  |                                                                                                         |  | 12 |  |               |
|            |                                 | FPF1504L |                                                                                                         |  | 14 |  |               |
| $t_{OFF}$  | Turn-Off Time<br>(Note 4)       | FPF1504  |                                                                                                         |  | 37 |  |               |
|            |                                 | FPF1504L |                                                                                                         |  | 16 |  |               |


Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

3. This parameter is guaranteed by design and characterization; not production tested.

4.  $t_{DON}/t_{DOFF}/t_R/t_F$  are defined in Figure 7.

5. Output discharge path is enabled during off.

### Timing Diagram – FPF1504

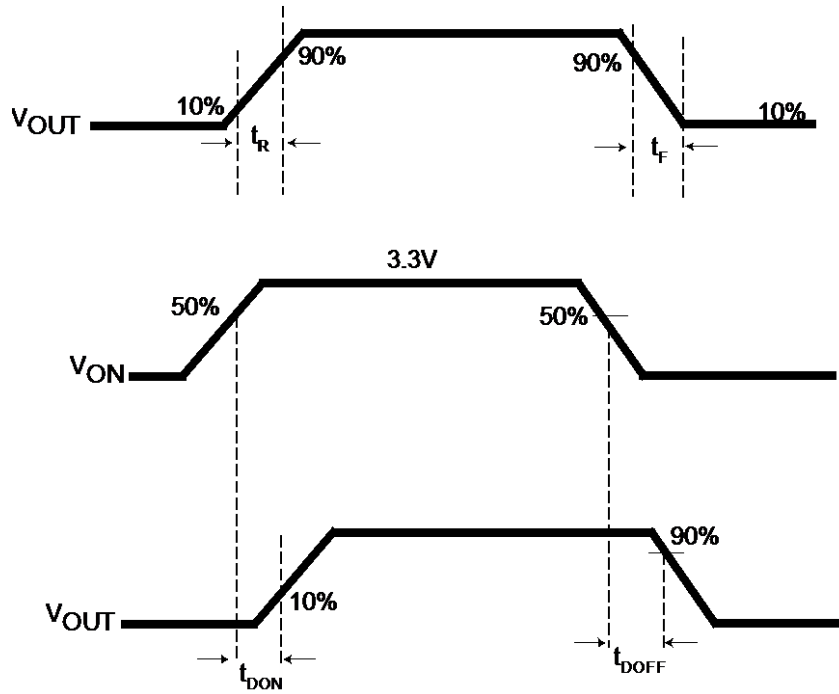

- NOTES: 6.  $t_{ON} = t_R + t_{DON}$ .  
7.  $t_{OFF} = t_F + t_{DOFF}$ .

Figure 7. Timing Diagram for FPF1504

# TYPICAL PERFORMANCE CHARACTERISTICS FOR FPF1504

Applicable to active high version only.

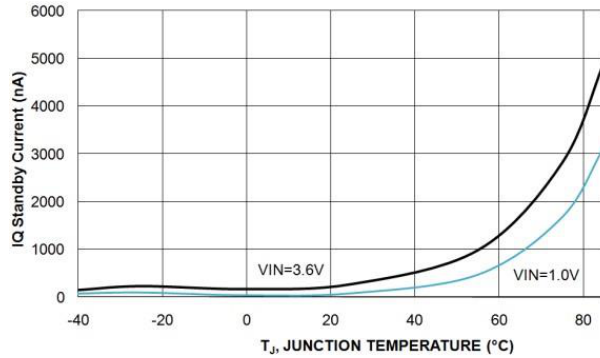


Figure 1. Shutdown Current vs. Temperature

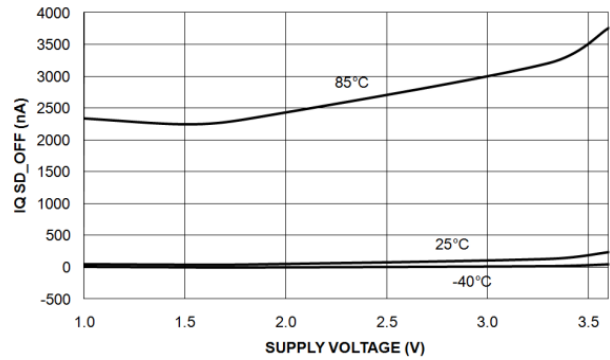


Figure 2. Shutdown Current vs. Supply Voltage

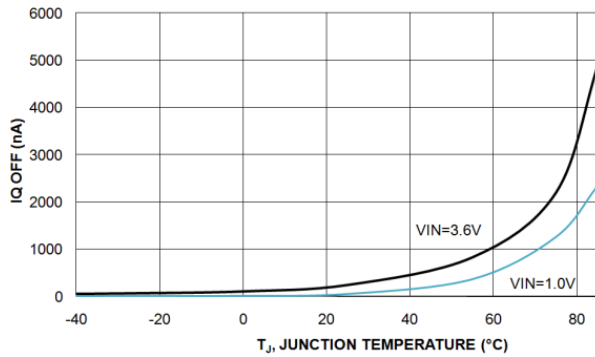


Figure 3. Off Supply Current vs. Temperature

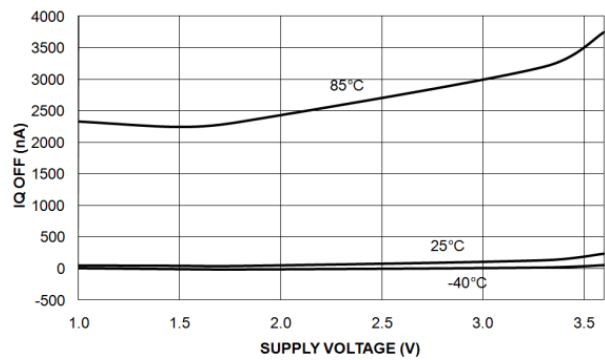


Figure 4. Off Supply Current vs. Supply Voltage

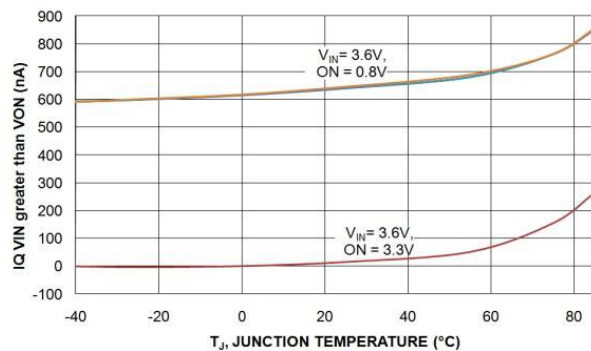


Figure 5. Quiescent Current vs. Temperature

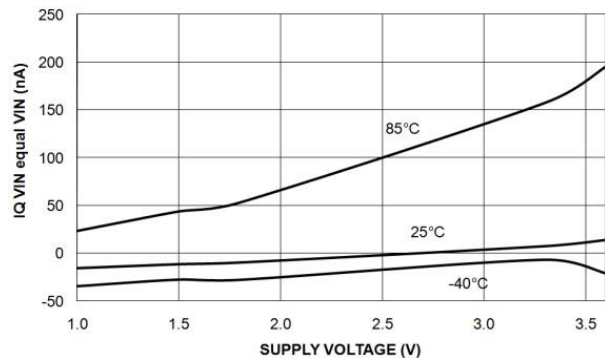


Figure 6. Quiescent Current vs. Supply Voltage  
( $V_{ON} = V_{IN}$ )

# TYPICAL PERFORMANCE CHARACTERISTICS FOR FPF1504

Applicable to active high version only.

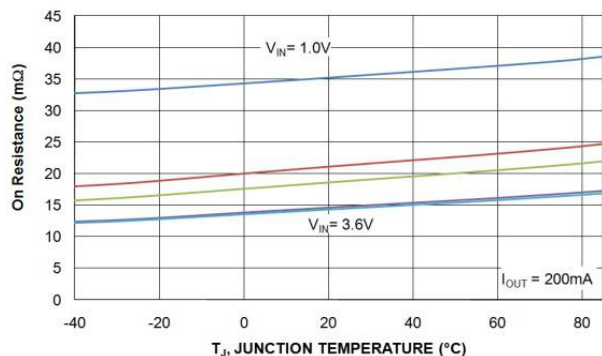


Figure 7.  $R_{ON}$  vs. Temperature

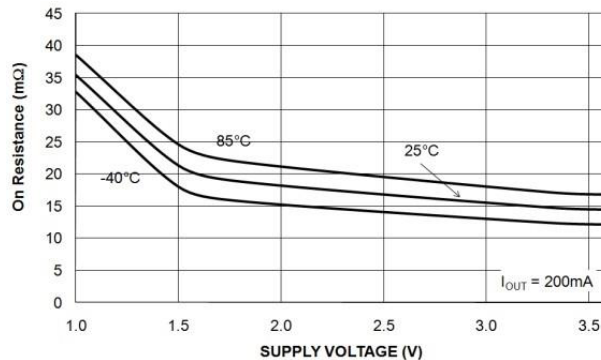


Figure 8.  $R_{ON}$  vs. Temperature

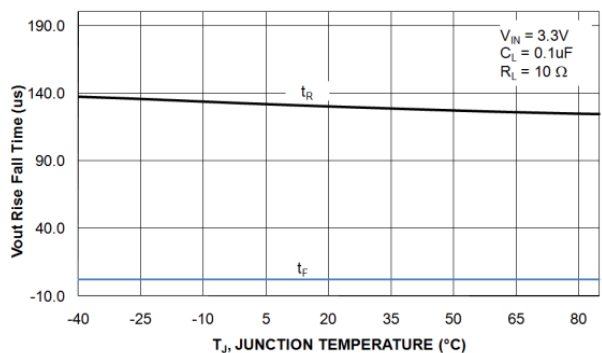


Figure 9.  $V_{OUT}$  Rise/Fall Times vs. Temperature ( $R_L = 10 \Omega$ )

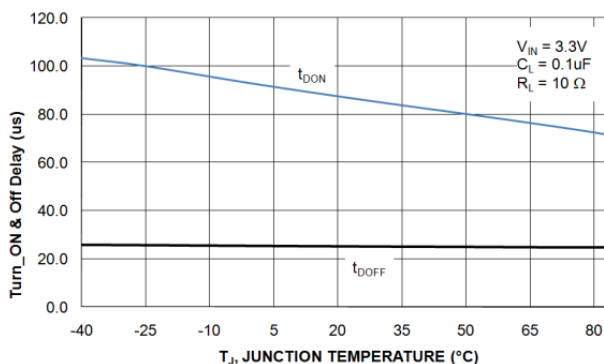


Figure 10.  $V_{OUT}$  Turn-On/Turn-Off Delays vs. Temperature ( $R_L = 10 \Omega$ )

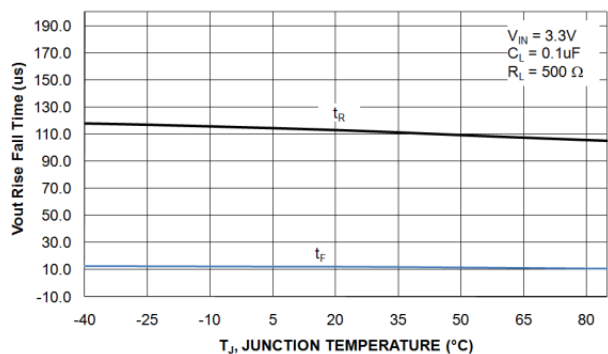


Figure 11.  $V_{OUT}$  Rise/Fall Time vs. Temperature ( $R_L = 500 \Omega$ )

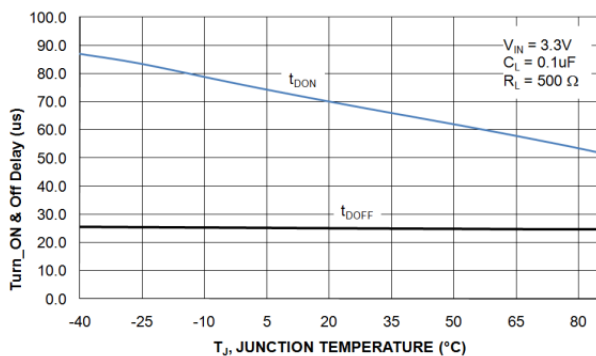


Figure 12.  $V_{OUT}$  Turn-On/Turn-Off Delays vs. Temperature ( $R_L = 500 \Omega$ )

TYPICAL PERFORMANCE CHARACTERISTICS FOR FPF1504

Applicable to active high version only.

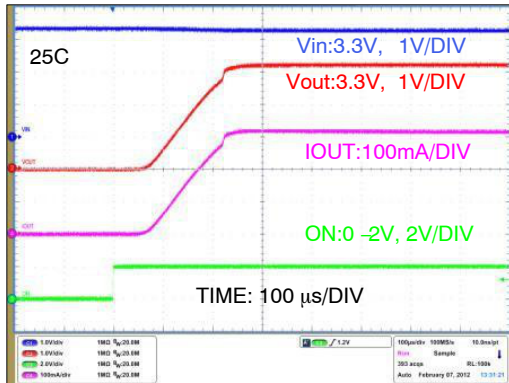


Figure 13. Turn-On Response  
( $V_{IN} = 3.3\text{ V}$ ,  $C_{OUT} = 0.1\text{ }\mu\text{F}$ ,  $R_L = 10\text{ }\Omega$ )

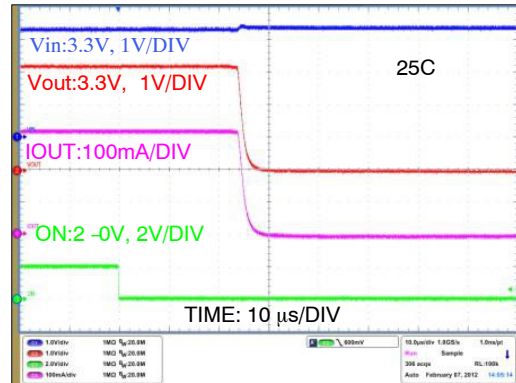


Figure 14. Turn-Off Response  
( $V_{IN} = 3.3\text{ V}$ ,  $C_{OUT} = 0.1\text{ }\mu\text{F}$ ,  $R_L = 10\text{ }\Omega$ )

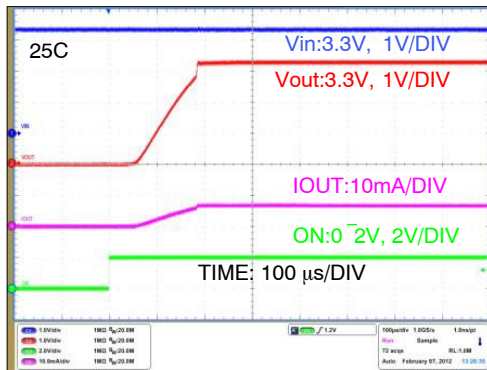


Figure 15. Turn-On Response  
( $V_{IN} = 3.3\text{ V}$ ,  $C_{OUT} = 0.1\text{ }\mu\text{F}$ ,  $R_L = 500\text{ }\Omega$ )

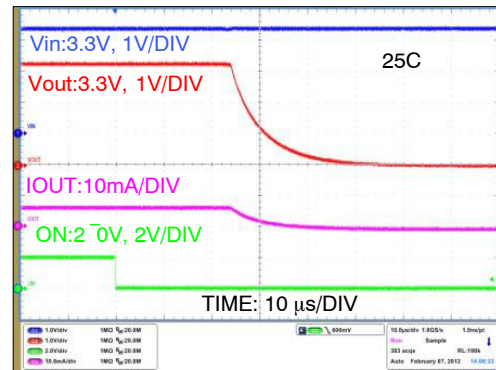


Figure 16. Turn-Off Response  
( $V_{IN} = 3.3\text{ V}$ ,  $C_{OUT} = 0.1\text{ }\mu\text{F}$ ,  $R_L = 500\text{ }\Omega$ )

## APPLICATION INFORMATION

### Input Capacitor

IntelliMAX switches don't require an input capacitor. To reduce device inrush current, a 0.1  $\mu$ F ceramic capacitor,  $C_{IN}$ , is recommended close to the VIN pin. A higher value of  $C_{IN}$  can be used to further reduce the voltage drop experienced as the switch is turned on into a large capacitive load.

### Output Capacitor

IntelliMAX switches work without an output capacitor. If the applications parasitic board inductance forces  $V_{OUT}$  below GND when switching off, a 0.1  $\mu$ F capacitor,  $C_{OUT}$ , should be placed between  $V_{OUT}$  and GND.

### Fall Time

Device output fall time can be calculated based on RC constant of external components as follows:

$$t_F = R_L \times C_L \times 2.2 \quad (\text{eq. 1})$$

where  $t_F$  is 90% to 10% fall time,  $R_L$  is output, load and  $C_L$  is output capacitor.

The same equation works for a device with a pull-down output resistor, then  $R_L$  is replaced by a parallel connected pull-down and external output resistor combination, as follows:

$$t_F = \frac{R_L \times R_{PD} \times C_L}{R_L + R_{PD}} \times 2.2 \quad (\text{eq. 2})$$

where  $t_F$  is 90% to 10% fall time,  $R_L$  is output load,  $R_{PD}$  is output pull-down resistor (65  $\Omega$  typical), and  $C_L$  is the output capacitor.

## RECOMMENDED LAND PATTERN AND LAYOUT

For best thermal performance and minimal inductance and parasitic effects, it is recommended to keep input and output traces short and the capacitors as close to the device

as possible. Below is a recommended layout for this device to achieve optimum performance.

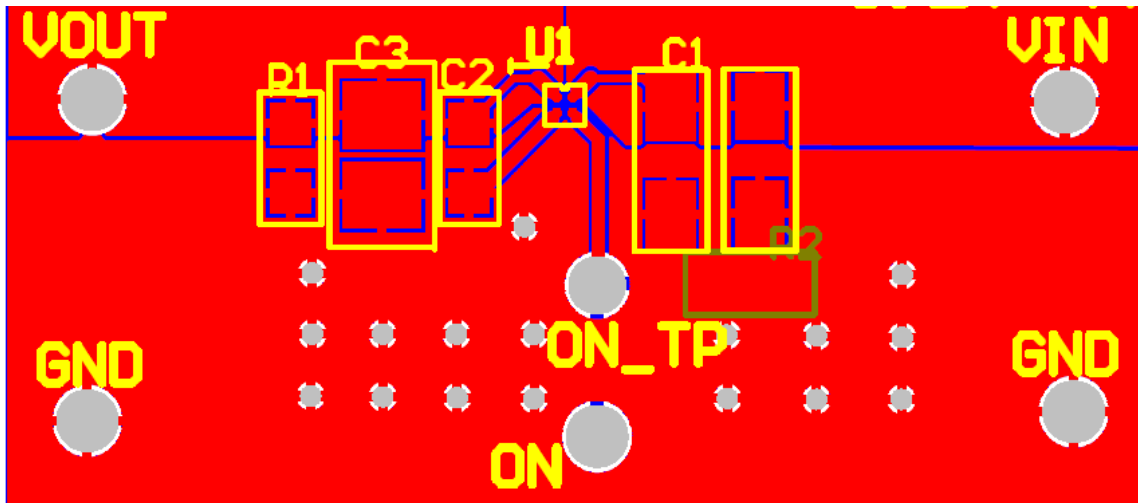


Figure 17. Recommended Land Pattern and Layout

The following information applies to the WLCSP package dimensions on the next page:


### PRODUCT-SPECIFIC DIMENSIONS

| Product      | D                            | E                            | X        | Y        |
|--------------|------------------------------|------------------------------|----------|----------|
| FPF1504UCX   | 960 $\mu$ m $\pm$ 30 $\mu$ m | 960 $\mu$ m $\pm$ 30 $\mu$ m | 0.230 mm | 0.230 mm |
| FPF1504BUCX  |                              |                              |          |          |
| FPF1504LUCX  |                              |                              |          |          |
| FPF1504LBUCX |                              |                              |          |          |


IntelliMAX is a trademark of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries.

**WLCSP4 0.96x0.96x0.582**  
CASE 567RH  
ISSUE O


DATE 30 NOV 2016

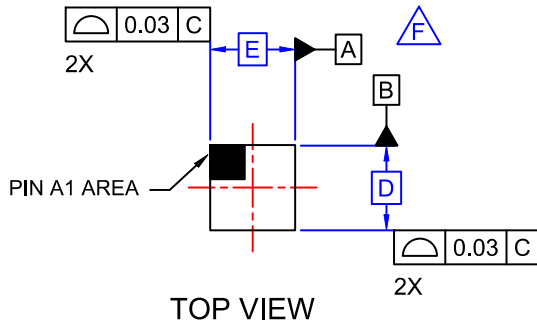



TOP VIEW

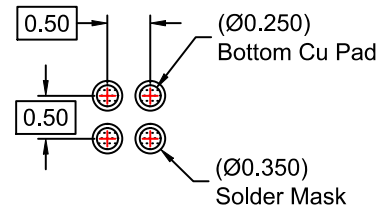

RECOMMENDED LAND PATTERN  
(NSMD PAD TYPE)

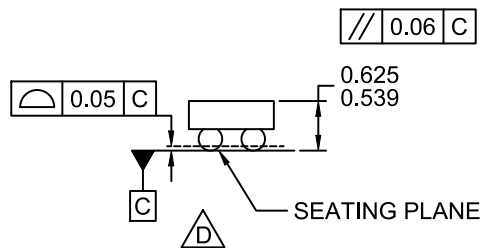

SIDE VIEWS

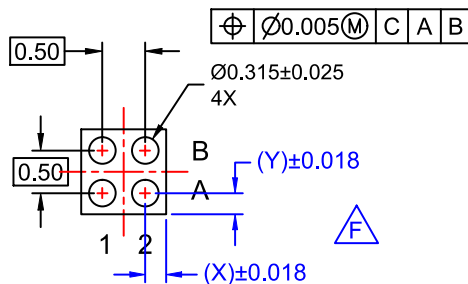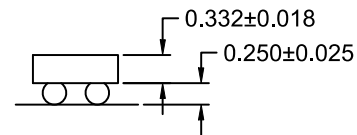

BOTTOM VIEW

**NOTES:**

- A. NO JEDEC REGISTRATION APPLIES.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 2009.
- D. DATUM C IS DEFINED BY THE SPHERICAL CROWNS OF THE BALLS.
- E. PACKAGE NOMINAL HEIGHT IS 582 MICRONS ±43 MICRONS (539-625 MICRONS).
- F. FOR DIMENSIONS D, E, X, AND Y SEE PRODUCT DATASHEET.

|                         |                               |                                                                                                                                                                                  |
|-------------------------|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98AON16575G</b>            | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>WLCSP4 0.96x0.96x0.582</b> | <b>PAGE 1 OF 1</b>                                                                                                                                                               |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marketing.pdf](http://www.onsemi.com/site/pdf/Patent-Marketing.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)