

Not Recommended for New Designs

This product was manufactured for Maxim by an outside wafer foundry using a process that is no longer available. It is not recommended for new designs. The data sheet remains available for existing users.

A Maxim replacement or an industry second-source may be available. Please see the QuickView data sheet for this part or contact technical support for assistance.

For further information, [contact Maxim's Applications Tech Support](#).

MAXIM

Low-Noise, Precision Op Amp

MXL1007

General Description

The Maxim MXL1007 operational amplifier features low-noise, $\pm 15\text{V}$ performance: $2.5\text{nV}/\sqrt{\text{Hz}}$ wideband noise, $1/f$ corner frequency of 2Hz , and 60nVp-p 0.1Hz to 10Hz noise. Precision and speed performance includes $10\mu\text{V}$ typical offset voltage, $0.2\mu\text{V}/^\circ\text{C}$ drift, 130dB CMRR and PSRR, and an 8MHz unity-gain stable bandwidth. In addition, the MXL1007's voltage gain is 20 million with a $2\text{k}\Omega$ load and 12 million with a 600Ω load.

Maxim's MXL1007 is a pin-compatible alternative to other industry-standard low-noise op amps such as the OP27 and LT1007.

For applications requiring higher performance, see the MAX427/MAX437 and MAX410/MAX412/MAX414 data sheets.

Applications

Low-Noise Signal Processing
Threshold Detection
Strain-Gauge Amplifiers
Microphone Preamplifiers


Features

- ◆ **Low-Noise Performance:**
 $4.5\text{nV}/\sqrt{\text{Hz}}$ Max (10Hz)
 $3.8\text{nV}/\sqrt{\text{Hz}}$ Max (1kHz)
- ◆ **High-Voltage Gain:**
 7 Million Min ($2\text{k}\Omega$ Load)
 3 Million Min (600Ω Load)
- ◆ **25 μV Max Offset Voltage**
- ◆ **0.6 $\mu\text{V}/^\circ\text{C}$ Max Drift**
- ◆ **117dB Min CMRR**

Ordering Information


PART	TEMP. RANGE	PIN-PACKAGE
MXL1007ACN8	0°C to $+70^\circ\text{C}$	8 Plastic DIP
MXL1007CN8	0°C to $+70^\circ\text{C}$	8 Plastic DIP
MXL1007CS8	0°C to $+70^\circ\text{C}$	8 SO
MXL1007CS	0°C to $+70^\circ\text{C}$	16 Wide SO
MXL1007AMJ8	-55°C to $+125^\circ\text{C}$	8 CERDIP
MXL1007MJ8	-55°C to $+125^\circ\text{C}$	8 CERDIP
MXL1007AMH	-55°C to $+125^\circ\text{C}$	8 TO-99
MXL1007MH	-55°C to $+125^\circ\text{C}$	8 TO-99

Typical Application Circuit

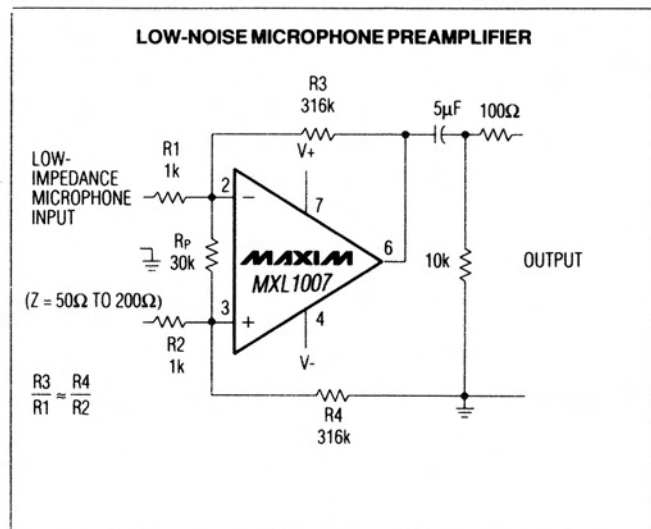

Pin Configurations

TOP VIEW



Pin Configurations continued on last page.

MAXIM

Maxim Integrated Products 1

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

Low-Noise, Precision Op Amp

ABSOLUTE MAXIMUM RATINGS

Supply Voltage..... $\pm 22\text{V}$
 Input Voltage (Note 1)..... $\pm 22\text{V}$
 Output Short-Circuit Duration.....Continuous
 Differential Input Voltage (Note 2)..... $\pm 0.7\text{V}$
 Differential Input Current (Note 2)..... $\pm 25\text{mA}$
 Continuous Power Dissipation ($T_A = +70^\circ\text{C}$)
 8-Pin Plastic DIP (derate $9.09\text{mW}/^\circ\text{C}$ above $+70^\circ\text{C}$) ... 727mW
 8-Pin SO (derate $5.88\text{mW}/^\circ\text{C}$ above $+70^\circ\text{C}$)..... 471mW
 16-Pin Wide SO (derate $9.52\text{mW}/^\circ\text{C}$ above $+70^\circ\text{C}$) 726mW

8-Pin CERDIP (derate $8.00\text{mW}/^\circ\text{C}$ above $+70^\circ\text{C}$)..... 640mW
 8-Pin TO-99 (derate $6.67\text{mW}/^\circ\text{C}$ above $+70^\circ\text{C}$)..... 533mW
 Operating Temperature Ranges:
 MXL1007AC___/C___..... 0°C to $+70^\circ\text{C}$
 MXL1007AM___/M___..... -55°C to $+125^\circ\text{C}$
 Junction Temperature Range..... -65°C to $+150^\circ\text{C}$
 Storage Temperature Range..... -65°C to $+150^\circ\text{C}$
 Lead Temperature (soldering, 10sec)..... $+300^\circ\text{C}$

Note 1: For supply voltages less than $\pm 22\text{V}$, the absolute maximum input voltage is equal to the supply voltage.

Note 2: MXL1007 inputs are protected by back-to-back diodes. Current-limiting resistors are not used in order to achieve low noise. If differential input voltage exceeds $\pm 0.7\text{V}$, the input current should be limited to 25mA .

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

($V_S = \pm 15\text{V}$, $T_A = +25^\circ\text{C}$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MXL1007AM/AC			MXL1007M/C			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Input Offset Voltage (Note 3)	V_{OS}			10	25		20	60	μV
Long-Term V_{OS} Stability (Notes 4, 5)	V_{OS}/TIME			0.2	1.0		0.2	1.0	$\mu\text{V}/\text{Mo}$
Input Bias Current	I_B			± 10	± 35		± 15	± 55	nA
Input Offset Current	I_{OS}			7	30		12	50	nA
Input Voltage Range	I_{VR}		± 11.0	± 12.5		± 11.0	± 12.5		V
Input Resistance – Common Mode	R_{INCM}			7			5		$\text{G}\Omega$
Input Noise Voltage (Notes 5, 6)	e_{n-p-p}	0.1Hz to 10Hz		0.06	0.13		0.06	0.13	μV_{p-p}
Input Noise-Voltage Density (Note 5)	e_n	$f_o = 10\text{Hz}$		2.8	4.5		2.8	4.5	$\text{nV}/\sqrt{\text{Hz}}$
		$f_o = 1\text{kHz}$		2.5	3.8		2.5	3.8	
Input Noise-Current Density (Notes 5, 7)	i_n	$f_o = 10\text{Hz}$		1.5	4.0		1.5	4.0	$\text{pA}/\sqrt{\text{Hz}}$
		$f_o = 1\text{kHz}$		0.4	0.6		0.4	0.6	
Large-Signal Voltage Gain	A_{VO}	$R_L \geq 2\text{k}\Omega$, $V_O = \pm 12\text{V}$	7.0	20.0		5.0	20.0		$\text{V}/\mu\text{V}$
		$R_L \geq 1\text{k}\Omega$, $V_O = \pm 10\text{V}$	5.0	16.0		3.5	16.0		
		$R_L \geq 600\Omega$, $V_O = \pm 10\text{V}$	3.0	12.0		2.0	12.0		
Output Voltage Swing	V_O	$R_L \geq 2\text{k}\Omega$	± 13.0	± 13.8		± 12.5	± 13.5		V
		$R_L \geq 600\Omega$	± 11.0	± 12.5		± 10.5	± 12.5		
Open-Loop Output Resistance	R_O	$V_O = 0$, $I_O = 0$		70			70		Ω
Common-Mode Rejection Ratio	CMRR	$V_{CM} = \pm 11\text{V}$	117	130		110	126		dB
Power-Supply Rejection Ratio	PSRR	$V_S = \pm 4\text{V}$ to $\pm 18\text{V}$	110	130		106	126		dB
Gain-Bandwidth Product (Note 5)	GBP	$f_o = 100\text{kHz}$	5.0	8.0		5.0	8.0		MHz
Slew Rate (Note 5)	SR	$R_L \geq 2\text{k}\Omega$	1.7	2.5		1.7	2.5		$\text{V}/\mu\text{s}$
Power Dissipation	PD	$V_O = 0$		80	120		80	140	mW

Low-Noise, Precision Op Amp

MXL1007

ELECTRICAL CHARACTERISTICS

($V_S = \pm 15V$, $T_A = -55^\circ C$ to $+125^\circ C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MXL1007AM			MXL1007M			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Input Offset Voltage (Note 3)	V_{OS}			25	60		50	160	μV
Average Offset-Voltage Drift (Note 8)	TCV_{OS}			0.2	0.6		0.3	1.0	$\mu V/^\circ C$
Input Offset Current	I_{OS}			15	50		20	85	nA
Input Bias Current	I_B			± 20	± 60		± 35	± 95	nA
Input Voltage Range	I_{VR}		± 10.3	± 11.5		± 10.3	± 11.5		V
Common-Mode Rejection Ratio	CMRR	$V_{CM} = \pm 10.3V$	112	126		104	120		dB
Power-Supply Rejection Ratio	PSRR	$V_S = \pm 4.5V$ to $\pm 18V$	104	126		100	120		dB
Large-Signal Voltage Gain	A_{VOL}	$R_L \geq 2k\Omega$, $V_O = \pm 10V$	3.0	14.0		2.0	14.0		V/ μV
		$R_L \geq 1k\Omega$, $V_O = \pm 10V$	2.0	10.0		1.5	10.0		
Maximum Output-Voltage Swing	V_{OUT}	$R_L \geq 2k\Omega$	± 12.5	± 13.5		± 12.0	± 13.5		V
Power Dissipation	PD	$V_O = 0$		100	150		100	170	mW

ELECTRICAL CHARACTERISTICS

($V_S = \pm 15V$, $T_A = 0^\circ C$ to $+70^\circ C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MXL1007AC			MXL1007C			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Input Offset Voltage (Note 3)	V_{OS}			20	50		35	110	μV
Average Offset-Voltage Drift (Note 8)	TCV_{OS}			0.2	0.6		0.3	1.0	$\mu V/^\circ C$
Input Offset Current	I_{OS}			10	40		15	70	nA
Input Bias Current	I_B			± 14	± 45		± 20	± 75	nA
Input Voltage Range	I_{VR}		± 10.5	± 11.8		± 10.5	± 11.8		V
Common-Mode Rejection Ratio	CMRR	$V_{CM} = \pm 10.5V$	114	126		106	120		dB
Power-Supply Rejection Ratio	PSRR	$V_S = \pm 4.5V$ to $\pm 18V$	106	126		102	120		dB
Large-Signal Voltage Gain	A_{VOL}	$R_L \geq 2k\Omega$, $V_O = \pm 10V$	4.0	18.0		2.5	18.0		V/ μV
		$R_L \geq 1k\Omega$, $V_O = \pm 10V$	2.5	14.0		2.0	14.0		
Maximum Output-Voltage Swing	V_{OUT}	$R_L \geq 2k\Omega$	± 12.5	± 13.6		± 12.0	± 13.6		V
Power Dissipation	PD	$V_O = 0$		90	144		90	160	mW

Note 3: Input Offset Voltage measurements are performed by automatic test equipment approximately 0.5 sec after application of power.

Note 4: Long-Term Input Offset Voltage Stability refers to the average trend line of Offset Voltage vs. Time over extended periods after the first 30 days of operation. Excluding the initial hour of operation, changes in V_{OS} during the first 30 days are typically $2.5\mu V$.

Note 5: This parameter is guaranteed by design and is not tested.

Note 6: See the test circuit for 0.1Hz to 10Hz tester in the *Typical Operating Characteristics* section.










Note 7: See the test circuit for current noise measurement in the *Applications Information* section.

Note 8: The Average Input Offset Drift performance is within the specifications unnullled or when nulled with a pot having a range of $8k\Omega$ to $20k\Omega$. AM and AC grades are sample tested to 0.1% AQL. C grade is guaranteed by design.

Low-Noise, Precision Op Amp

Typical Operating Characteristics





($T_A = +25^\circ\text{C}$, unless otherwise noted)

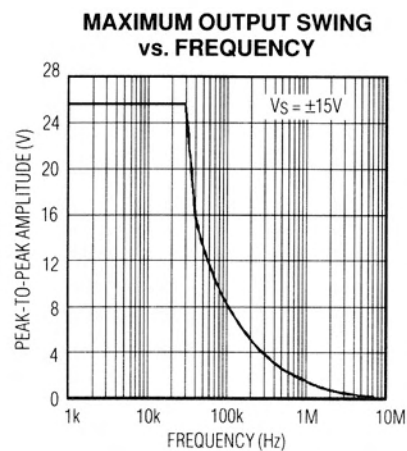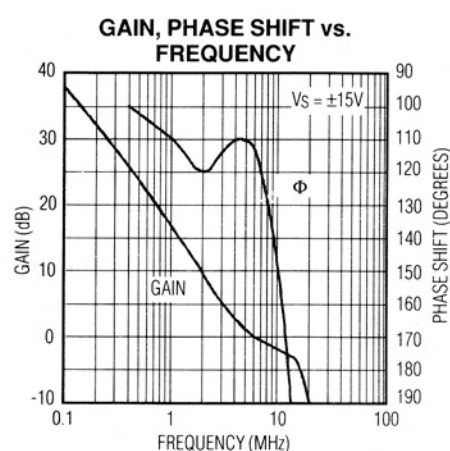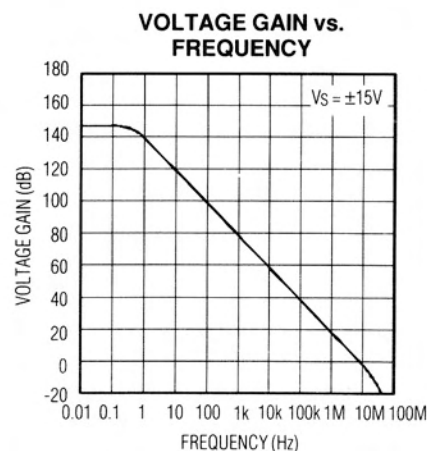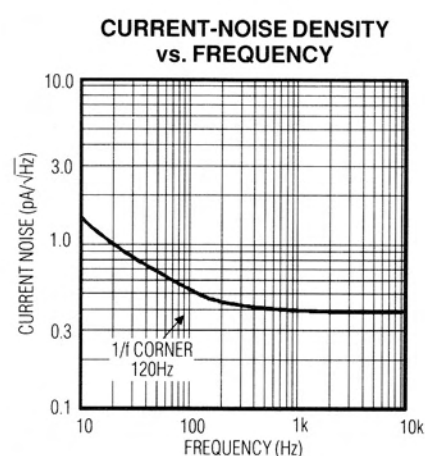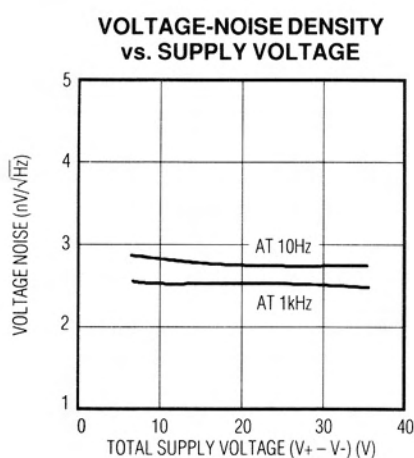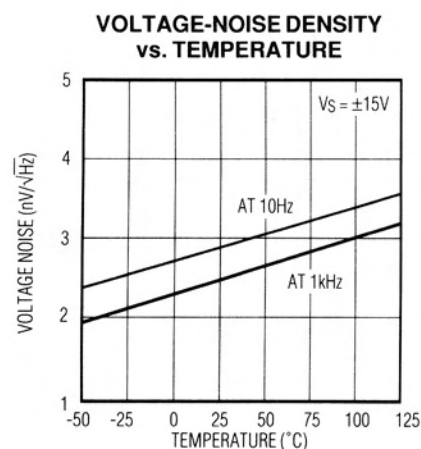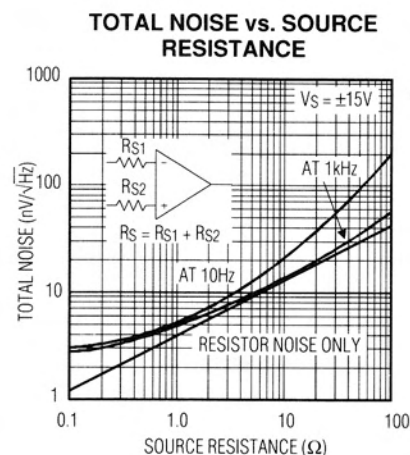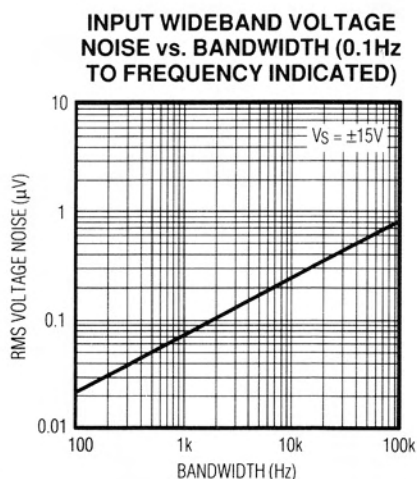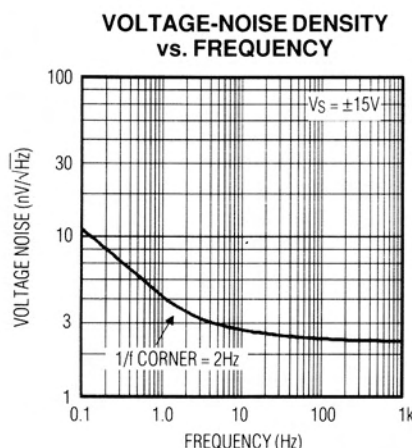

Low-Noise, Precision Op Amp

Typical Operating Characteristics (continued)

MXL1007

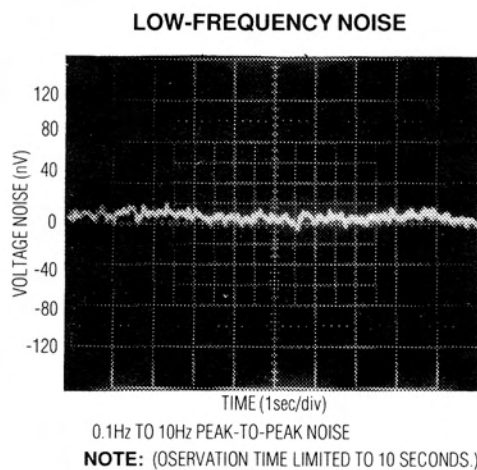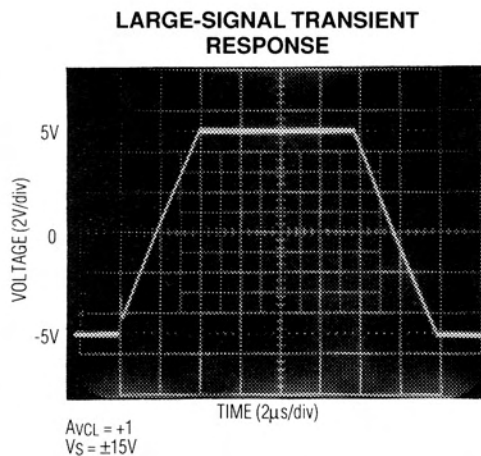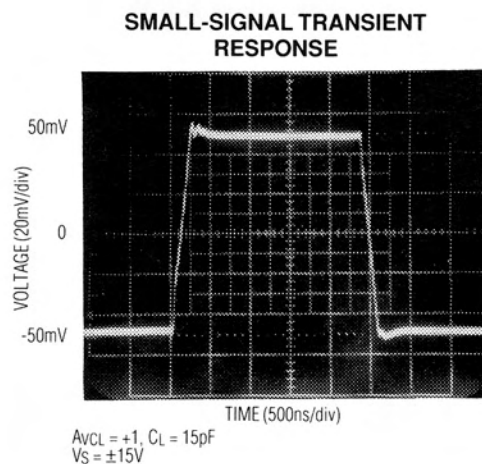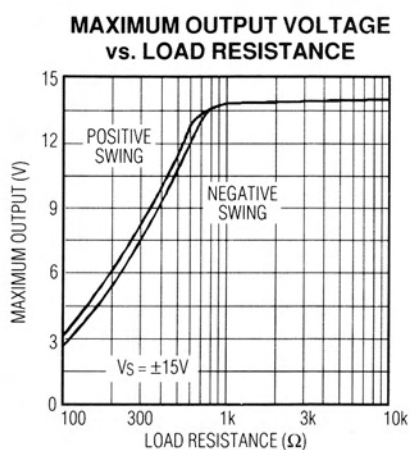

Low-Noise, Precision Op Amp

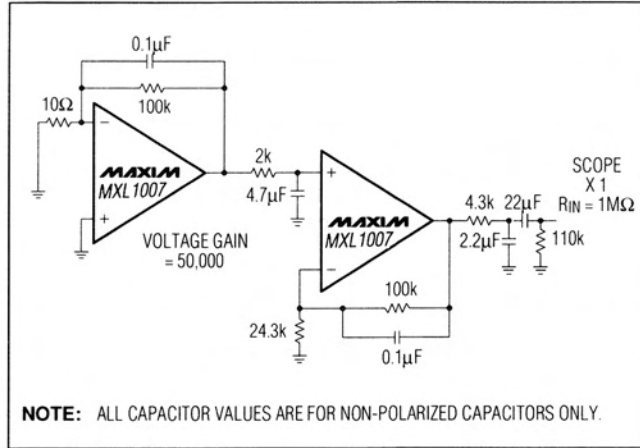


Figure 1. Voltage-Noise Test Circuit (0.1Hz to 10Hz)

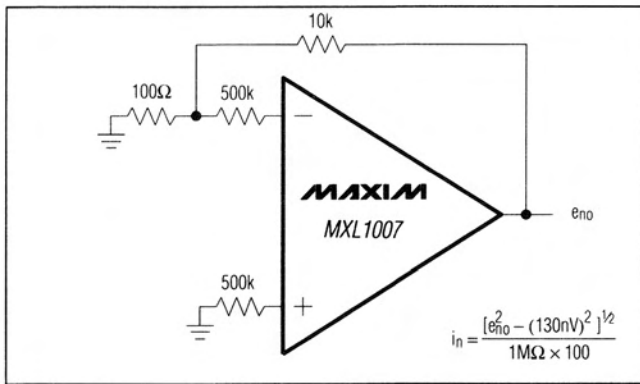


Figure 2. Current-Noise Test Circuit



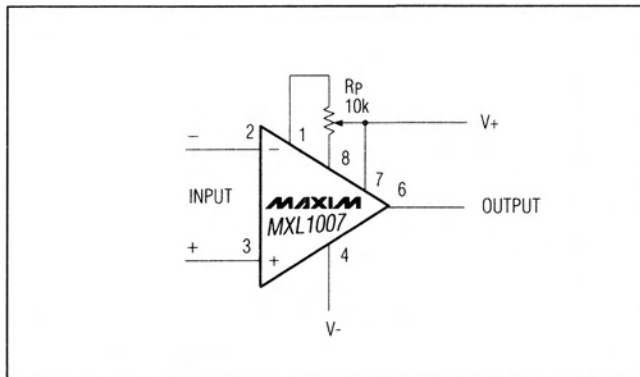


Figure 3. Offset Nulling Circuit

Pin Configurations (continued)

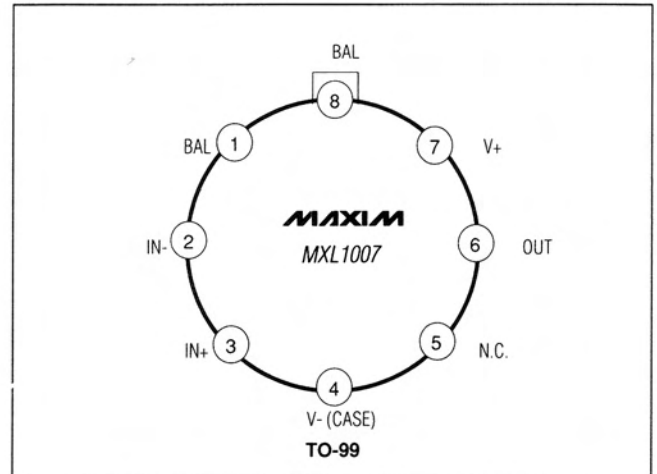

TOP VIEW


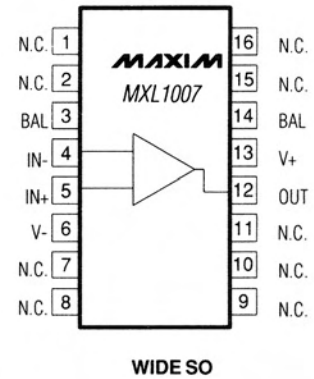


Low-Noise, Precision Op Amp

Package Information


(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)

MXL1007

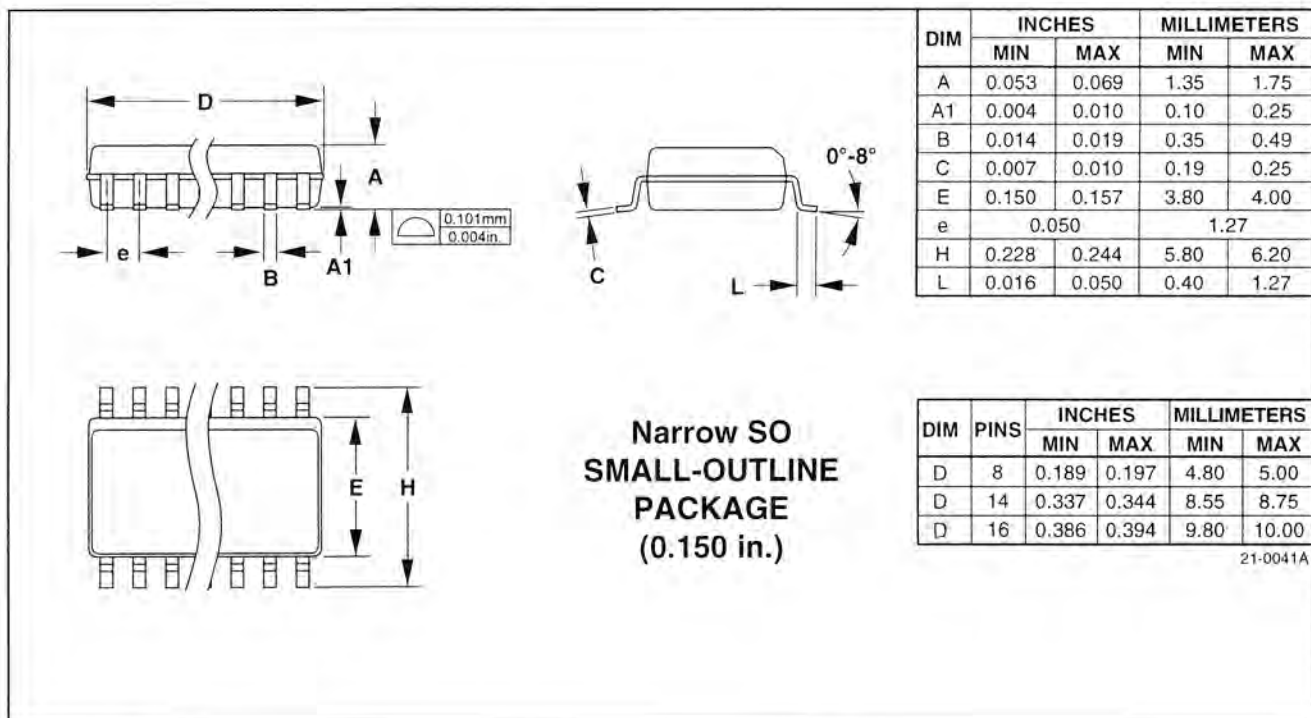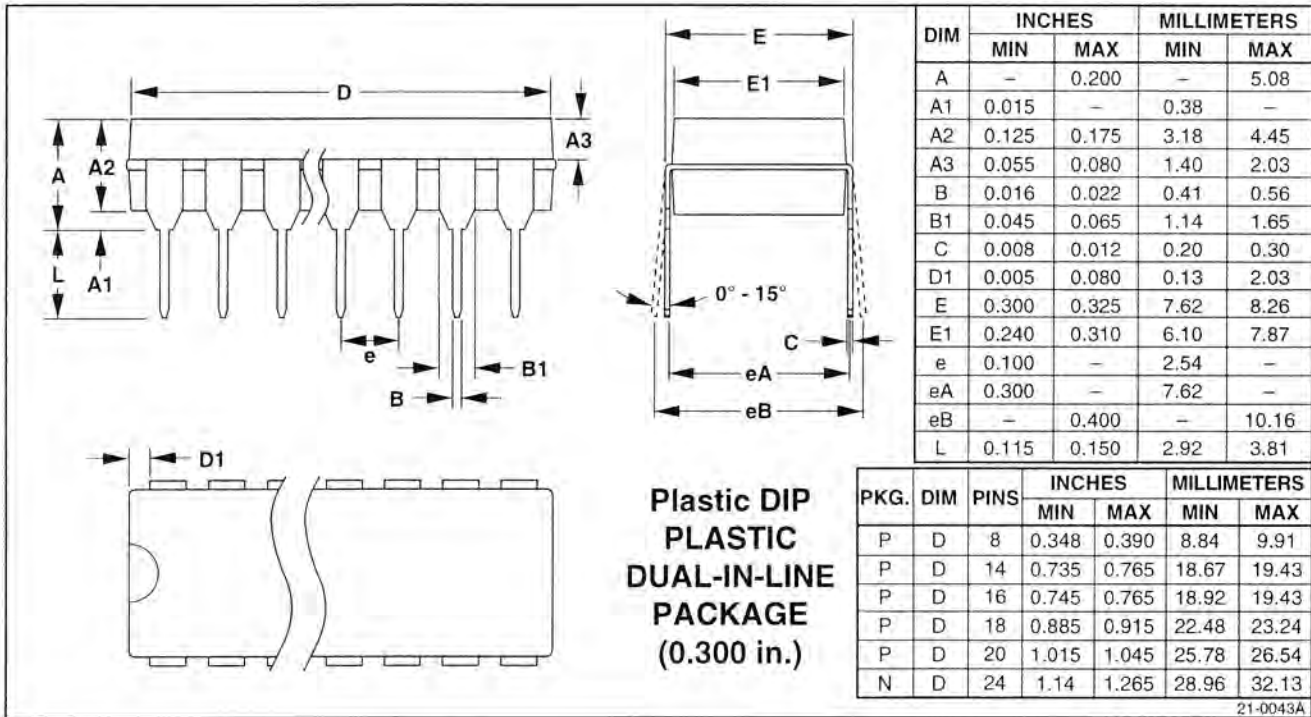

Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)

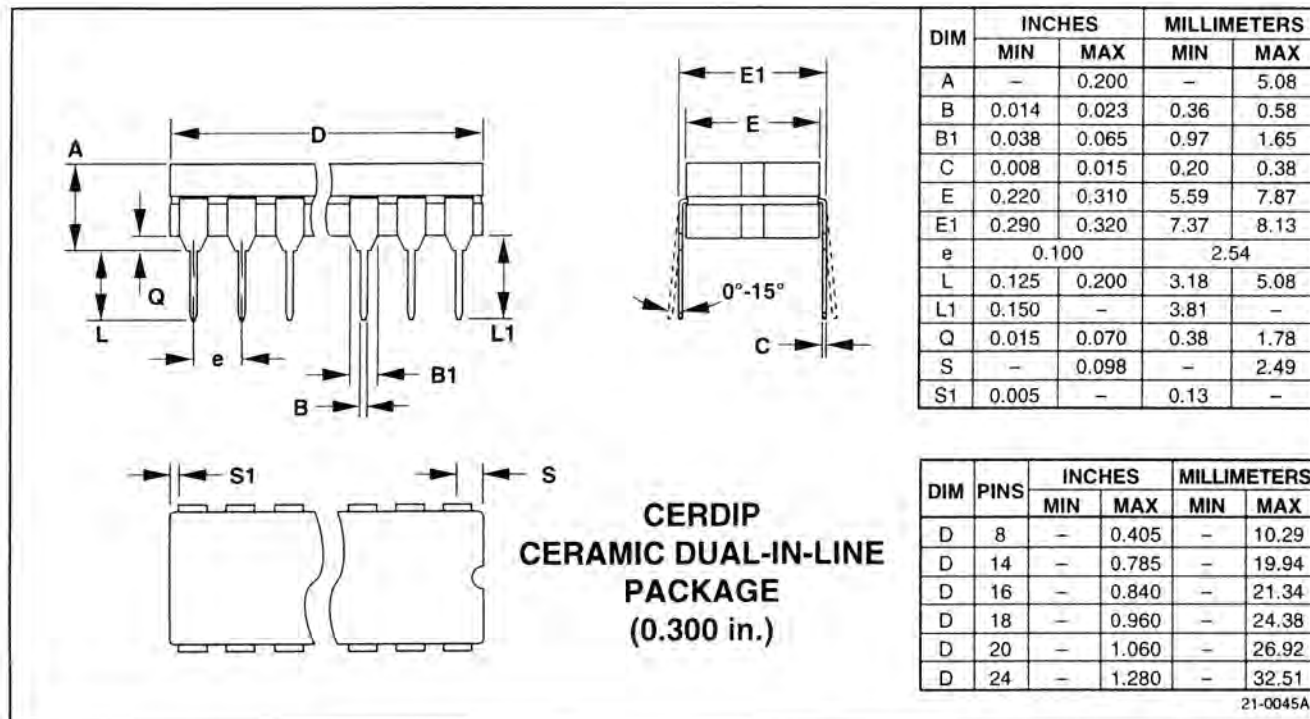

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

8 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600**