SPICE MODEL: MMBT3904T

MMBT3904T

NPN SMALL SIGNAL SURFACE MOUNT TRANSISTOR

Features

- Epitaxial Planar Die Construction
- Complementary PNP Type Available (MMBT3906T)
- Ultra-Small Surface Mount Package
- **Available in Lead Free/RoHS Compliant Version (Note 2)**

Mechanical Data

- Case: SOT-523
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Solderable per MIL-STD-202, Method 208
- Also Available in Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe). Please see Ordering Information, Note 5, on Page 2
- Terminal Connections: See Diagram
- Marking (See Page 2): 1N
- Ordering & Date Code Information, See Page 2
- Weight: 0.002 grams (approximate)

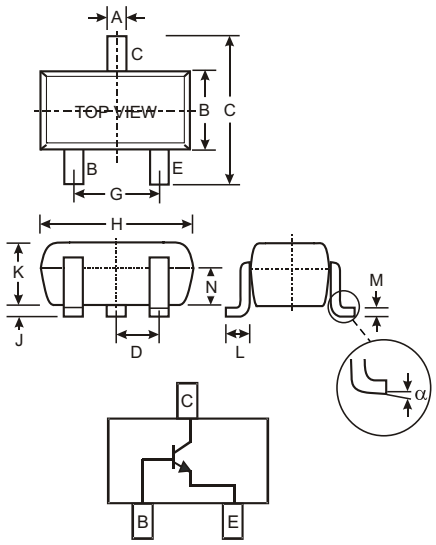

SOT-523			
Dim	**Min**	**Max**	**Typ**
A	0.15	0.30	0.22
B	0.75	0.85	0.80
C	1.45	1.75	1.60
D	—	—	0.50
G	0.90	1.10	1.00
H	1.50	1.70	1.60
J	0.00	0.10	0.05
K	0.60	0.80	0.75
L	0.10	0.30	0.22
M	0.10	0.20	0.12
N	0.45	0.65	0.50
α	0°	8°	—
All Dimensions in mm			

Maximum Ratings @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	V_{CBO}	60	V
Collector-Emitter Voltage	V_{CEO}	40	V
Emitter-Base Voltage	V_{EBO}	6.0	V
Collector Current - Continuous	I_C	200	mA
Power Dissipation (Note 1)	P_d	150	mW
Thermal Resistance, Junction to Ambient (Note 1)	$R_{\theta JA}$	833	°C/W
Operating and Storage and Temperature Range	T_j, T_{STG}	-55 to +150	°C

Notes: 1. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch; pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.
2. No purposefully added lead.

© Diodes Incorporated

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Min	Max	Unit	Test Condition
OFF CHARACTERISTICS (Note 3)					
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	60	—	V	I_C = 10μA, I_E = 0
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	40	—	V	I_C = 1.0mA, I_B = 0
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	6.0	—	V	I_E = 10μA, I_C = 0
Collector Cutoff Current	I_{CEX}	—	50	nA	V_{CE} = 30V, $V_{EB(OFF)}$ = 3.0V
Base Cutoff Current	I_{BL}	—	50	nA	V_{CE} = 30V, $V_{EB(OFF)}$ = 3.0V
ON CHARACTERISTICS (Note 3)					
DC Current Gain	h_{FE}	40 70 100 60 30	— — 300 — —	—	I_C = 100μA, V_{CE} = 1.0V I_C = 1.0mA, V_{CE} = 1.0V I_C = 10mA, V_{CE} = 1.0V I_C = 50mA, V_{CE} = 1.0V I_C = 100mA, V_{CE} = 1.0V
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	—	0.20 0.30	V	I_C = 10mA, I_B = 1.0mA I_C = 50mA, I_B = 5.0mA
Base- Emitter Saturation Voltage	$V_{BE(SAT)}$	0.65 —	0.85 0.95	V	I_C = 10mA, I_B = 1.0mA I_C = 50mA, I_B = 5.0mA
SMALL SIGNAL CHARACTERISTICS					
Output Capacitance	C_{obo}	—	4.0	pF	V_{CB} = 5.0V, f = 1.0MHz, I_E = 0
Input Capacitance	C_{ibo}	—	8.0	pF	V_{EB} = 0.5V, f = 1.0MHz, I_C = 0
Input Impedance	h_{ie}	1.0	10	kΩ	V_{CE} = 10V, I_C = 1.0mA, f = 1.0kHz
Voltage Feedback Ratio	h_{re}	0.5	8.0	x 10^{-4}	
Small Signal Current Gain	h_{fe}	100	400	—	
Output Admittance	h_{oe}	1.0	40	μS	
Current Gain-Bandwidth Product	f_T	300	—	MHz	V_{CE} = 20V, I_C = 10mA, f = 100MHz
Noise Figure	NF	—	5.0	dB	V_{CE} = 5.0Vdc, I_C = 100μAdc, R_S = 1.0KΩ, f = 1.0MHz
SWITCHING CHARACTERISTICS					
Delay Time	t_d	—	35	ns	V_{CC} = 3.0V, I_C = 10mA, $V_{BE(off)}$ = - 0.5V, I_{B1} = 1.0mA
Rise Time	t_r	—	35	ns	
Storage Time	t_s	—	200	ns	V_{CC} = 3.0V, I_C = 10mA
Fall Time	t_f	—	50	ns	I_{B1} = I_{B2} = 1.0mA

Ordering Information (Note 4)

Device	Packaging	Shipping
MMBT3904T-7	SOT-523	3000/Tape & Reel

Notes: 3. Short duration test pulse used to minimize self-heating effect.
4. For Packaging Details, go to our website at http://www.diodes.com/datasheets/ap02007.pdf.
5. For Lead Free/RoHS Compliant version part number, please add "-F" suffix to the part number above. Example: MMBT3904T-7-F.

Marking Information



1N = Product Type Marking Code
YM = Date Code Marking
Y = Year (ex: N = 2002)
M = Month (ex: 9 = September)

Date Code Key

Year	2002	2003	2004	2005	2006	2007	2008	2009
Code	N	P	R	S	T	U	V	W

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

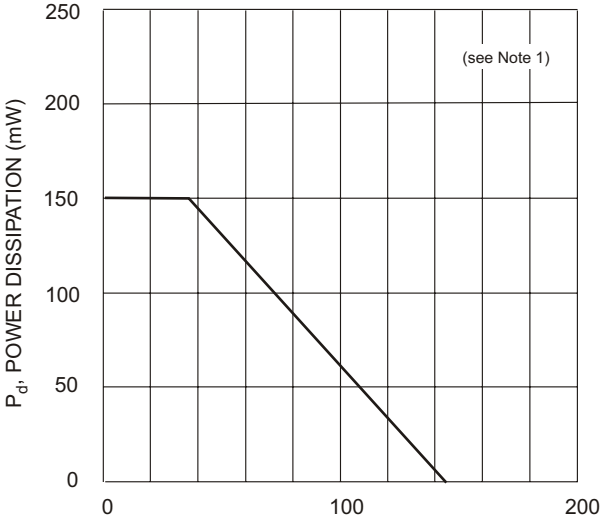

Fig. 1, Power Derating Curve

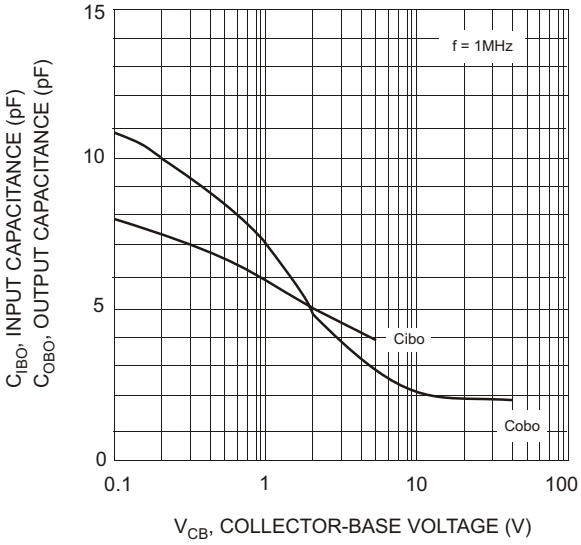

Fig. 2, Input and Output Capacitance vs. Collector-Base Voltage

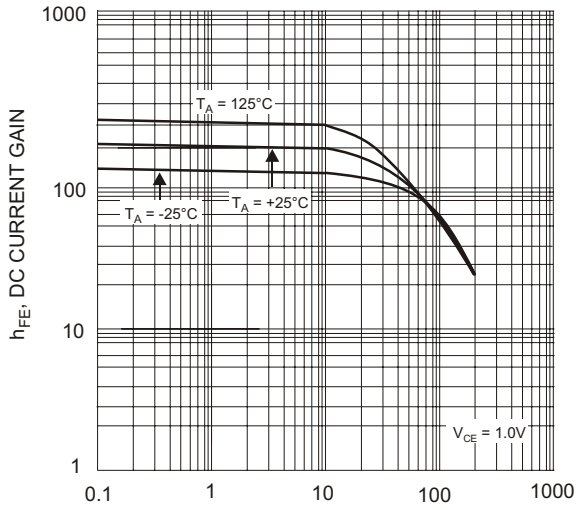

Fig. 3, Typical DC Current Gain vs Collector Current

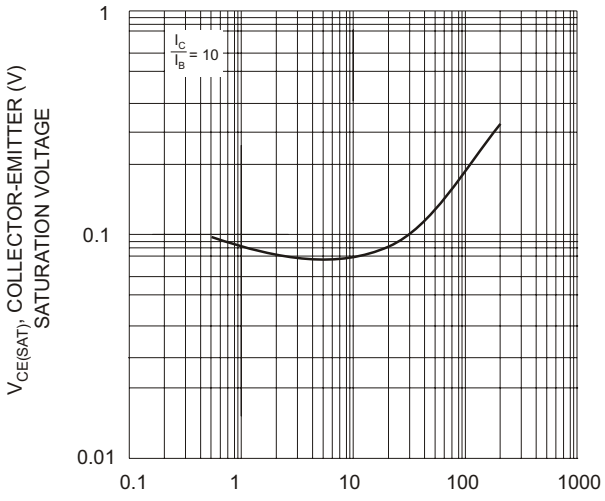

Fig. 4, Typical Collector-Emitter Saturation Voltage vs. Collector Current

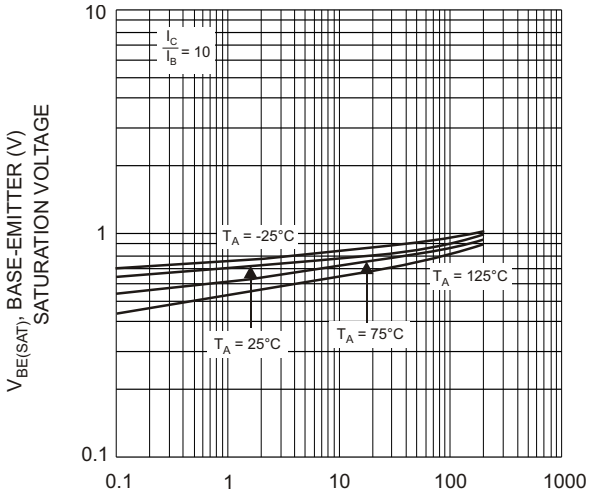

Fig. 5, Typical Base-Emitter Saturation Voltage vs. Collector Current