

# 0.9 V, Rail-to-Rail, Single Operational Amplifier

## NCS2001, NCV2001


The NCS2001 is an industry first sub-one voltage operational amplifier that features a rail-to-rail common mode input voltage range, along with rail-to-rail output drive capability. This amplifier is guaranteed to be fully operational down to 0.9 V, providing an ideal solution for powering applications from a single cell Nickel Cadmium (NiCd) or Nickel Metal Hydride (NiMH) battery. Additional features include no output phase reversal with overdriven inputs, trimmed input offset voltage of 0.5 mV, extremely low input bias current of 40 pA, and a unity gain bandwidth of 1.4 MHz at 5.0 V. The tiny NCS2001 is the ideal solution for small portable electronic applications and is available in the space saving TSOP-5 (SOT23-5) and SC-88A (SC70-5) packages with two industry standard pinouts.

### Features

- 0.9 V Guaranteed Operation
- Rail-to-Rail Common Mode Input Voltage Range
- Rail-to-Rail Output Drive Capability
- No Output Phase Reversal for Over-Driven Input Signals
- 0.5 mV Trimmed Input Offset
- 10 pA Input Bias Current
- 1.4 MHz Unity Gain Bandwidth at  $\pm 2.5$  V, 1.1 MHz at  $\pm 0.5$  V
- Tiny SC-88A (SC70-5) and TSOP-5 (SOT23-5) Packages
- NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

### Typical Applications


- Single Cell NiCd/NiMH Battery Powered Applications
- Cellular Telephones
- Pagers
- Personal Digital Assistants
- Electronic Games
- Digital Cameras
- Camcorders
- Hand-Held Instruments

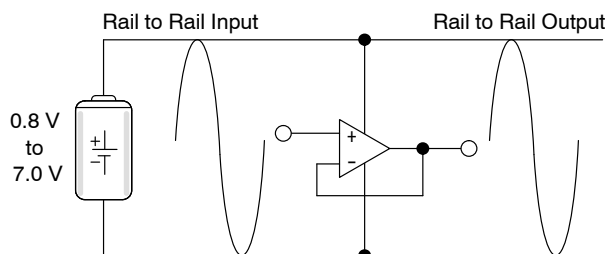


This device contains 63 active transistors.

Figure 1. Typical Application


### MARKING DIAGRAMS



TSOP-5  
(SOT23-5)  
SN SUFFIX  
CASE 483




SC-88A  
(SC70-5)  
SQ SUFFIX  
CASE 419A




XXX = Specific Device Code  
M = Date Code  
■ = Pb-Free Package

(Note: Microdot may be in either location)

### PIN CONNECTIONS

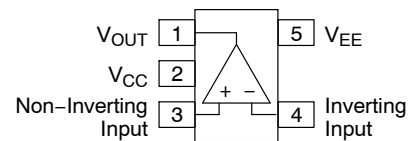

Style 1 Pinout (SN1T1, SQ1T2)

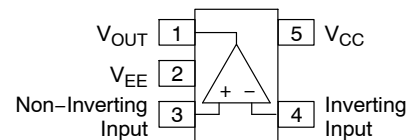

Style 2 Pinout (SN2T1, SQ2T2)

### ORDERING INFORMATION

See detailed ordering, marking and shipping information in the dimensions section on page 14 of this data sheet.

## MAXIMUM RATINGS

| Rating                                                                                                                                                                                                                                                                             | Symbol                                               | Value                                        | Unit                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|----------------------------------------------|--------------------------|
| Supply Voltage ( $V_{CC}$ to $V_{EE}$ )                                                                                                                                                                                                                                            | $V_S$                                                | 7.0                                          | V                        |
| Input Differential Voltage Range (Note 1)                                                                                                                                                                                                                                          | $V_{IDR}$                                            | $V_{EE} - 300 \text{ mV}$ to $7.0 \text{ V}$ | V                        |
| Input Common Mode Voltage Range (Note 1)                                                                                                                                                                                                                                           | $V_{ICR}$                                            | $V_{EE} - 300 \text{ mV}$ to $7.0 \text{ V}$ | V                        |
| Output Short Circuit Duration (Note 2)                                                                                                                                                                                                                                             | $t_{sc}$                                             | Indefinite                                   | sec                      |
| Junction Temperature                                                                                                                                                                                                                                                               | $T_J$                                                | 150                                          | °C                       |
| Power Dissipation and Thermal Characteristics<br>TSOP-5 (SOT23-5) Package<br>Thermal Resistance, Junction-to-Air<br>Power Dissipation @ $T_A = 70^\circ\text{C}$<br>SC-88A (SC70-5) Package<br>Thermal Resistance, Junction-to-Air<br>Power Dissipation @ $T_A = 70^\circ\text{C}$ | $R_{\theta JA}$<br>$P_D$<br>$R_{\theta JA}$<br>$P_D$ | 235<br>340<br>280<br>286                     | °C/W<br>mW<br>°C/W<br>mW |
| Operating Ambient Temperature Range<br>NCS2001<br>NCV2001 (Note 3)                                                                                                                                                                                                                 | $T_A$                                                | -40 to +105<br>-40 to +125                   | °C                       |
| Storage Temperature Range                                                                                                                                                                                                                                                          | $T_{stg}$                                            | -65 to 150                                   | °C                       |
| ESD Protection at any Pin Human Body Model (Note 4)                                                                                                                                                                                                                                | $V_{ESD}$                                            | 1500                                         | V                        |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected. Operating the device outside its recommended conditions, but still within its maximum rated limits may not cause immediate damage. However, doing so can lead to reduced performance, unpredictable behavior, and potentially shorten the device's lifespan or reliability.

1. Either or both inputs should not exceed the range of  $V_{EE} - 300 \text{ mV}$  to  $V_{EE} + 7.0 \text{ V}$ .
2. Maximum package power dissipation limits must be observed to ensure that the maximum junction temperature is not exceeded.  
 $T_J = T_A + (P_D R_{\theta JA})$ .
3. NCV prefix is qualified for automotive usage.
4. ESD data available upon request.

## DC ELECTRICAL CHARACTERISTICS

( $V_{CC} = 2.5 \text{ V}$ ,  $V_{EE} = -2.5 \text{ V}$ ,  $V_{CM} = V_O = 0 \text{ V}$ ,  $R_L$  to GND,  $T_A = 25^\circ\text{C}$  unless otherwise noted.)

| Characteristics                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Symbol                   | Min                                                                  | Typ                                             | Max                                                         | Unit                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|----------------------------------------------------------------------|-------------------------------------------------|-------------------------------------------------------------|------------------------------|
| Input Offset Voltage<br>$V_{CC} = 0.45 \text{ V}$ , $V_{EE} = -0.45 \text{ V}$<br>$T_A = 25^\circ\text{C}$<br>$T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$<br>$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$<br>$V_{CC} = 1.5 \text{ V}$ , $V_{EE} = -1.5 \text{ V}$<br>$T_A = 25^\circ\text{C}$<br>$T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$<br>$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$<br>$V_{CC} = 2.5 \text{ V}$ , $V_{EE} = -2.5 \text{ V}$<br>$T_A = 25^\circ\text{C}$<br>$T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$<br>$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$ | $V_{IO}$                 | -6.0<br>-8.5<br>-9.5<br>-6.0<br>-7.0<br>-7.5<br>-6.0<br>-7.5<br>-7.5 | 0.5<br>-<br>-<br>0.5<br>-<br>-<br>0.5<br>-<br>- | 6.0<br>8.5<br>9.5<br>6.0<br>7.0<br>7.5<br>6.0<br>7.5<br>7.5 | mV                           |
| Input Offset Voltage Temperature Coefficient ( $R_S = 50$ )<br>$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | $\Delta V_{IO}/\Delta T$ | -                                                                    | 8.0                                             | -                                                           | $\mu\text{V}/^\circ\text{C}$ |
| Input Bias Current ( $V_{CC} = 1.0 \text{ V}$ to $5.0 \text{ V}$ )                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | $I_{IB}$                 | -                                                                    | 10                                              | -                                                           | pA                           |
| Input Common Mode Voltage Range                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | $V_{ICR}$                | -                                                                    | $V_{EE}$ to $V_{CC}$                            | -                                                           | V                            |
| Large Signal Voltage Gain<br>$V_{CC} = 0.45 \text{ V}$ , $V_{EE} = -0.45 \text{ V}$<br>$R_L = 10 \text{ k}$<br>$R_L = 2.0 \text{ k}$<br>$V_{CC} = 1.5 \text{ V}$ , $V_{EE} = -1.5 \text{ V}$<br>$R_L = 10 \text{ k}$<br>$R_L = 2.0 \text{ k}$<br>$V_{CC} = 2.5 \text{ V}$ , $V_{EE} = -2.5 \text{ V}$<br>$R_L = 10 \text{ k}$<br>$R_L = 2.0 \text{ k}$                                                                                                                                                                                                                                            | $A_{VOL}$                | -<br>-<br>-<br>-<br>20<br>15                                         | 40<br>20<br>40<br>40<br>40<br>40                | -<br>-<br>-<br>-<br>-<br>-                                  | kV/V                         |



**DC ELECTRICAL CHARACTERISTICS (continued)**(V<sub>CC</sub> = 2.5 V, V<sub>EE</sub> = -2.5 V, V<sub>CM</sub> = V<sub>O</sub> = 0 V, R<sub>L</sub> to GND, T<sub>A</sub> = 25 °C unless otherwise noted.)

| Characteristics                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Symbol          | Min                                                                                                                                                                          | Typ                                                                                                                                                  | Max                                                                                                                                                                      | Unit |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| Output Voltage Swing, High State Output (V <sub>ID</sub> = +0.5 V)<br>V <sub>CC</sub> = 0.45 V, V <sub>EE</sub> = -0.45 V<br>T <sub>A</sub> = 25 °C<br>R <sub>L</sub> = 10 k<br>R <sub>L</sub> = 2.0 k<br>T <sub>A</sub> = 0 °C to 70 °C<br>R <sub>L</sub> = 10 k<br>R <sub>L</sub> = 2.0 k<br>T <sub>A</sub> = -40 °C to 125 °C<br>R <sub>L</sub> = 10 k<br>R <sub>L</sub> = 2.0 k<br>V <sub>CC</sub> = 1.5 V, V <sub>EE</sub> = -1.5 V<br>T <sub>A</sub> = 25 °C<br>R <sub>L</sub> = 10 k<br>R <sub>L</sub> = 2.0 k<br>T <sub>A</sub> = 0 °C to 70 °C<br>R <sub>L</sub> = 10 k<br>R <sub>L</sub> = 2.0 k<br>T <sub>A</sub> = -40 °C to 125 °C<br>R <sub>L</sub> = 10 k<br>R <sub>L</sub> = 2.0 k<br>V <sub>CC</sub> = 2.5 V, V <sub>EE</sub> = -2.5 V<br>T <sub>A</sub> = 25 °C<br>R <sub>L</sub> = 10 k<br>R <sub>L</sub> = 2.0 k<br>T <sub>A</sub> = 0 °C to 70 °C<br>R <sub>L</sub> = 10 k<br>R <sub>L</sub> = 2.0 k<br>T <sub>A</sub> = -40 °C to 125 °C<br>R <sub>L</sub> = 10 k<br>R <sub>L</sub> = 2.0 k | V <sub>OH</sub> | 0.40<br>0.35<br><br>0.40<br>0.35<br><br>0.40<br>0.35<br><br>1.45<br>1.40<br><br>1.45<br>1.40<br><br>1.45<br>1.40<br><br>2.45<br>2.40<br><br>2.45<br>2.40<br><br>2.45<br>2.40 | 0.494<br>0.466<br><br>-<br>-<br><br>-<br>-<br><br>1.498<br>1.480<br><br>-<br>-<br><br>-<br>-<br><br>2.498<br>2.475<br><br>-<br>-<br><br>-<br>-       | -<br>-<br><br>-<br>-<br><br>-<br>-<br><br>-<br>-<br><br>-<br>-<br><br>-<br>-<br><br>-<br>-<br><br>-<br>-                                                                 | V    |
| Output Voltage Swing, Low State Output (V <sub>ID</sub> = -0.5 V)<br>V <sub>CC</sub> = 0.45 V, V <sub>EE</sub> = -0.45 V<br>T <sub>A</sub> = 25 °C<br>R <sub>L</sub> = 10 k<br>R <sub>L</sub> = 2.0 k<br>T <sub>A</sub> = 0 °C to 70 °C<br>R <sub>L</sub> = 10 k<br>R <sub>L</sub> = 2.0 k<br>T <sub>A</sub> = -40 °C to 125 °C<br>R <sub>L</sub> = 10 k<br>R <sub>L</sub> = 2.0 k<br>V <sub>CC</sub> = 1.5 V, V <sub>EE</sub> = -1.5 V<br>T <sub>A</sub> = 25 °C<br>R <sub>L</sub> = 10 k<br>R <sub>L</sub> = 2.0 k<br>T <sub>A</sub> = 0 °C to 70 °C<br>R <sub>L</sub> = 10 k<br>R <sub>L</sub> = 2.0 k<br>T <sub>A</sub> = -40 °C to 125 °C<br>R <sub>L</sub> = 10 k<br>R <sub>L</sub> = 2.0 k<br>V <sub>CC</sub> = 2.5 V, V <sub>EE</sub> = -2.5 V<br>T <sub>A</sub> = 25 °C<br>R <sub>L</sub> = 10 k<br>R <sub>L</sub> = 2.0 k<br>T <sub>A</sub> = 0 °C to 70 °C<br>R <sub>L</sub> = 10 k<br>R <sub>L</sub> = 2.0 k<br>T <sub>A</sub> = -40 °C to 125 °C<br>R <sub>L</sub> = 10 k<br>R <sub>L</sub> = 2.0 k  | V <sub>OL</sub> | -<br>-<br><br>-<br>-<br><br>-<br>-<br><br>-<br>-<br><br>-<br>-<br><br>-<br>-<br><br>-<br>-<br><br>-<br>-<br><br>-<br>-<br><br>-<br>-                                         | -0.494<br>-0.480<br><br>-<br>-<br><br>-<br>-<br><br>-1.493<br>-1.480<br><br>-<br>-<br><br>-<br>-<br><br>-2.492<br>-2.479<br><br>-<br>-<br><br>-<br>- | -0.40<br>-0.35<br><br>-0.40<br>-0.35<br><br>-0.40<br>-0.35<br><br>-1.45<br>-1.40<br><br>-1.45<br>-1.40<br><br>-2.45<br>-2.40<br><br>-2.45<br>-2.40<br><br>-2.45<br>-2.40 | V    |



## NCS2001, NCV2001

### DC ELECTRICAL CHARACTERISTICS (continued)

( $V_{CC} = 2.5\text{ V}$ ,  $V_{EE} = -2.5\text{ V}$ ,  $V_{CM} = V_O = 0\text{ V}$ ,  $R_L$  to GND,  $T_A = 25\text{ }^{\circ}\text{C}$  unless otherwise noted.)

| Characteristics                                                                                                                                                                                                                                                                                                                                                                                                                      | Symbol   | Min                                                   | Typ                                                            | Max                                                                              | Unit   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------------------------------------------------------|----------------------------------------------------------------|----------------------------------------------------------------------------------|--------|
| Common Mode Rejection Ratio ( $V_{in} = 0$ to $5.0$ V)                                                                                                                                                                                                                                                                                                                                                                               | CMRR     | 60                                                    | 70                                                             | –                                                                                | dB     |
| Power Supply Rejection Ratio ( $V_{CC} = 0.5$ V to $2.5$ V, $V_{EE} = -2.5$ V)                                                                                                                                                                                                                                                                                                                                                       | PSRR     | 55                                                    | 65                                                             | –                                                                                | dB     |
| Output Short Circuit Current<br>$V_{CC} = 0.45$ V, $V_{EE} = -0.45$ V, $V_{ID} = \pm 0.4$ V<br>Source Current High Output State<br>Sink Current Low Output State<br>$V_{CC} = 1.5$ V, $V_{EE} = -1.5$ V, $V_{ID} = \pm 0.5$ V<br>Source Current High Output State<br>Sink Current Low Output State<br>$V_{CC} = 2.5$ V, $V_{EE} = -2.5$ V, $V_{ID} = \pm 0.5$ V<br>Source Current High Output State<br>Sink Current Low Output State | $I_{SC}$ | <br>0.5<br>–<br><br>15<br>–<br><br>40<br>–            | <br>1.2<br>–3.0<br><br>29<br>–40<br><br>76<br>–96              | <br>–<br>–1.5<br><br>–<br>–20<br><br>–<br>–50                                    | <br>mA |
| Power Supply Current (Per Amplifier, $V_O = 0$ V)<br>$V_{CC} = 0.45$ V, $V_{EE} = -0.45$ V<br>$T_A = 25$ °C<br>$T_A = 0$ °C to $70$ °C<br>$T_A = -40$ °C to $125$ °C<br>$V_{CC} = 1.5$ V, $V_{EE} = -1.5$ V<br>$T_A = 25$ °C<br>$T_A = 0$ °C to $70$ °C<br>$T_A = -40$ °C to $125$ °C<br>$V_{CC} = 2.5$ V, $V_{EE} = -2.5$ V<br>$T_A = 25$ °C<br>$T_A = 0$ °C to $70$ °C<br>$T_A = -40$ °C to $125$ °C                               | $I_D$    | <br>–<br>–<br>–<br><br>–<br>–<br>–<br><br>–<br>–<br>– | <br>0.51<br>–<br>–<br><br>0.72<br>–<br>–<br><br>0.82<br>–<br>– | <br>1.10<br>1.10<br>1.10<br><br>1.40<br>1.40<br>1.40<br><br>1.50<br>1.50<br>1.50 | <br>mA |

## AC ELECTRICAL CHARACTERISTICS

( $V_{CC} = 2.5\text{ V}$ ,  $V_{EE} = -2.5\text{ V}$ ,  $V_{CM} = V_O = 0\text{ V}$ ,  $R_I$  to GND,  $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted.)

| Characteristics                                                                                                                                                                                                     | Symbol   | Min           | Typ               | Max         | Unit                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------------|-------------------|-------------|------------------------|
| Differential Input Resistance ( $V_{CM} = 0\text{ V}$ )                                                                                                                                                             | $R_{in}$ | –             | $> 1.0$           | –           | tera $\Omega$          |
| Differential Input Capacitance ( $V_{CM} = 0\text{ V}$ )                                                                                                                                                            | $C_{in}$ | –             | 3.0               | –           | pF                     |
| Equivalent Input Noise Voltage ( $f = 1.0\text{ kHz}$ )                                                                                                                                                             | $e_n$    | –             | 100               | –           | nV/ $\sqrt{\text{Hz}}$ |
| Gain Bandwidth Product ( $f = 100\text{ kHz}$ )<br>$V_{CC} = 0.45\text{ V}$ , $V_{EE} = -0.45\text{ V}$<br>$V_{CC} = 1.5\text{ V}$ , $V_{EE} = -1.5\text{ V}$<br>$V_{CC} = 2.5\text{ V}$ , $V_{EE} = -2.5\text{ V}$ | GBW      | –<br>–<br>0.5 | 1.1<br>1.3<br>1.4 | –<br>–<br>– | MHz                    |
| Gain Margin ( $R_L = 10\text{ k}$ , $C_L = 5.0\text{ pf}$ )                                                                                                                                                         | $A_m$    | –             | 6.5               | –           | dB                     |
| Phase Margin ( $R_L = 10\text{ k}$ , $C_L = 5.0\text{ pf}$ )                                                                                                                                                        | $\phi_m$ | –             | 60                | –           | °                      |
| Power Bandwidth ( $V_O = 4.0\text{ V}_{pp}$ , $R_L = 2.0\text{ k}$ , THD = 1.0%, $A_V = 1.0$ )                                                                                                                      | $BW_P$   | –             | 80                | –           | kHz                    |
| Total Harmonic Distortion ( $V_O = 4.0\text{ V}_{pp}$ , $R_L = 2.0\text{ k}$ , $A_V = 1.0$ )<br>$f = 1.0\text{ kHz}$<br>$f = 10\text{ kHz}$                                                                         | THD      | –<br>–        | 0.008<br>0.08     | –<br>–      | %                      |
| Slew Rate ( $V_S = \pm 2.5\text{ V}$ , $V_O = -2.0\text{ V}$ to $2.0\text{ V}$ , $R_L = 2.0\text{ k}$ , $A_V = 1.0$ )<br>Positive Slope<br>Negative Slope                                                           | SR       | 1.0<br>1.0    | 1.6<br>1.6        | 6.0<br>6.0  | V/ $\mu\text{s}$       |

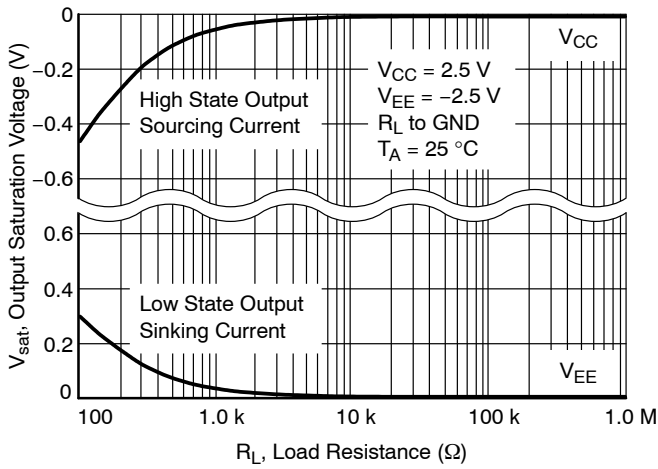


Figure 2. Split Supply Output Saturation vs. Load Resistance

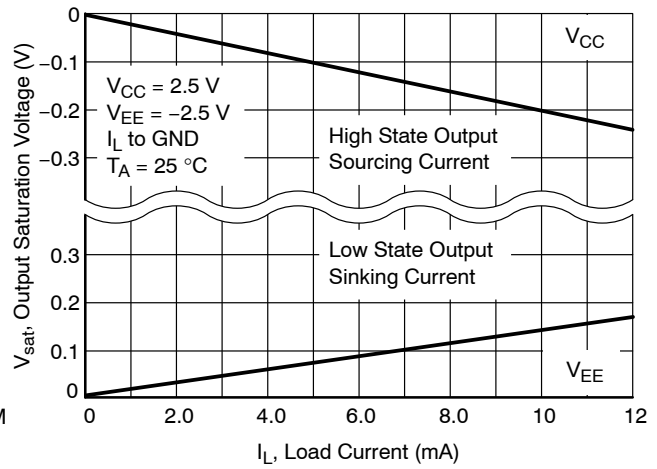


Figure 3. Split Supply Output Saturation vs. Load Current

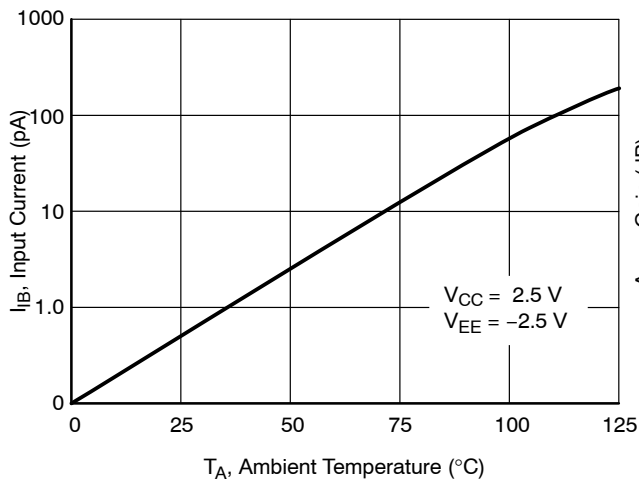


Figure 4. Input Bias Current vs. Temperature

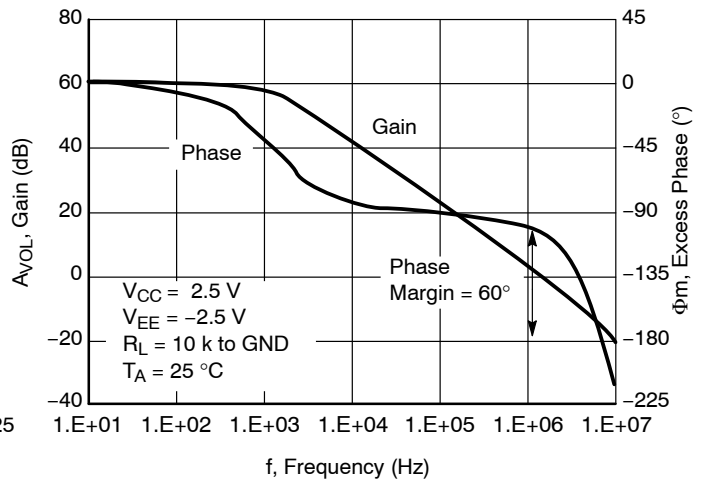


Figure 5. Gain and Phase vs. Frequency

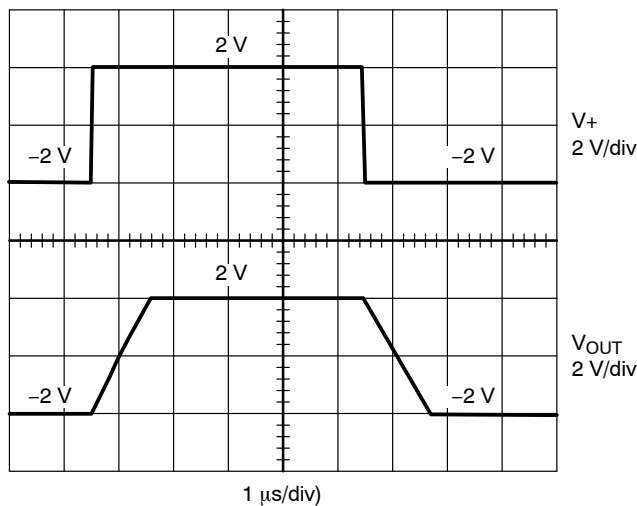


Figure 6. Transient Response

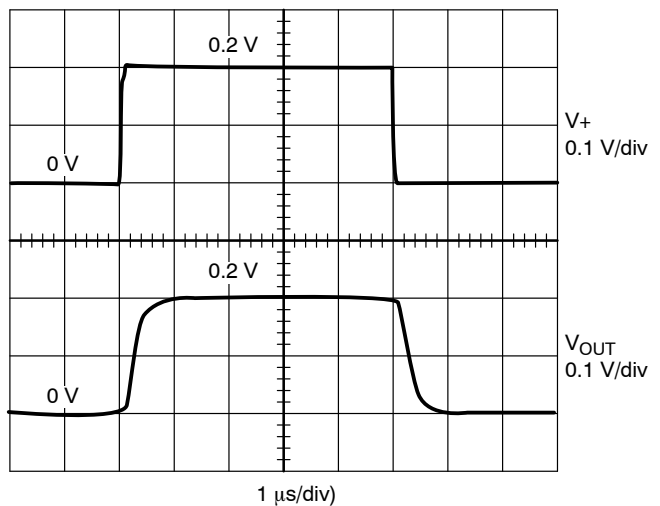


Figure 7. Slew Rate

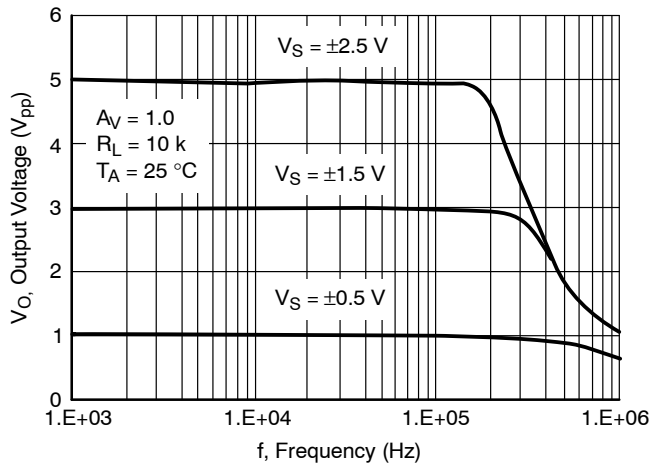


Figure 8. Output Voltage vs. Frequency

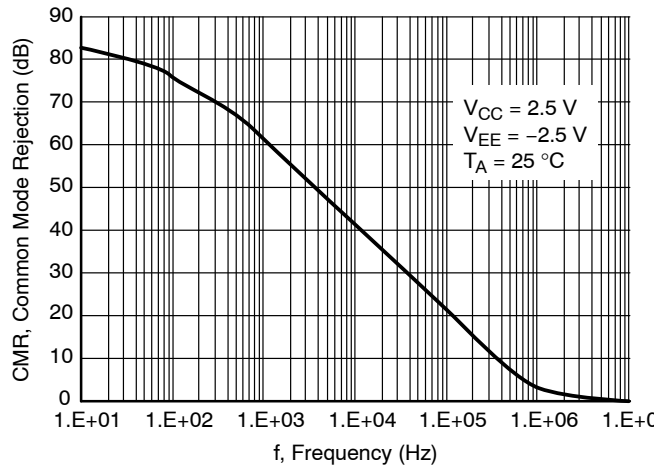


Figure 9. Common Mode Rejection vs. Frequency

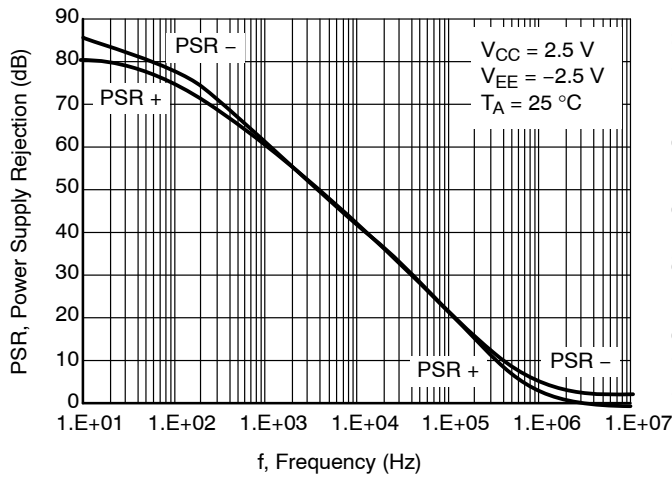


Figure 10. Power Supply Rejection vs. Frequency

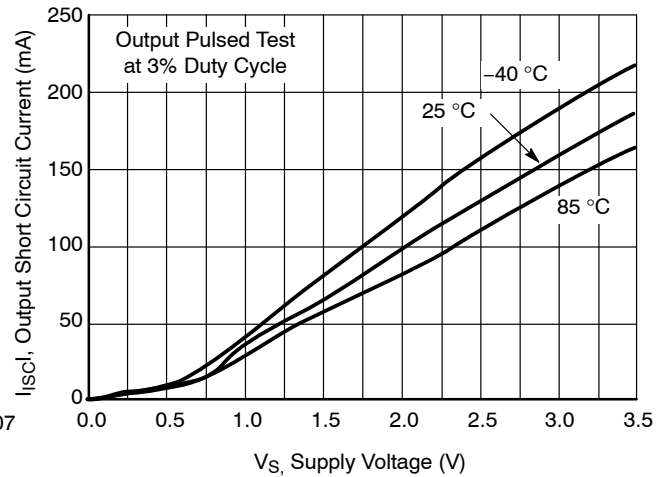


Figure 11. Output Short Circuit Sinking Current vs. Supply Voltage

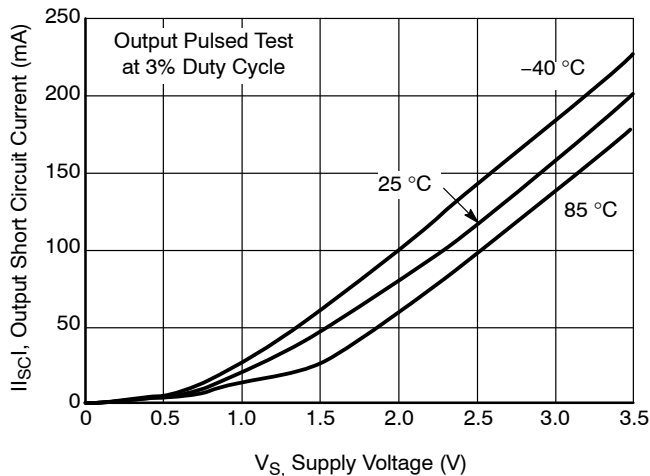


Figure 12. Output Short Circuit Sourcing Current vs. Supply Voltage

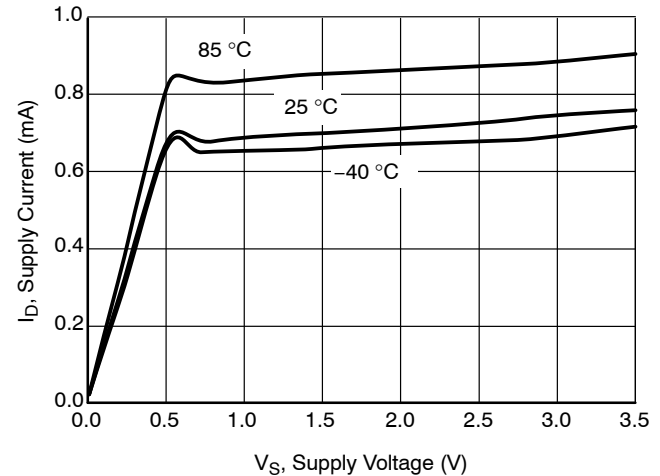


Figure 13. Supply Current vs. Supply Voltage

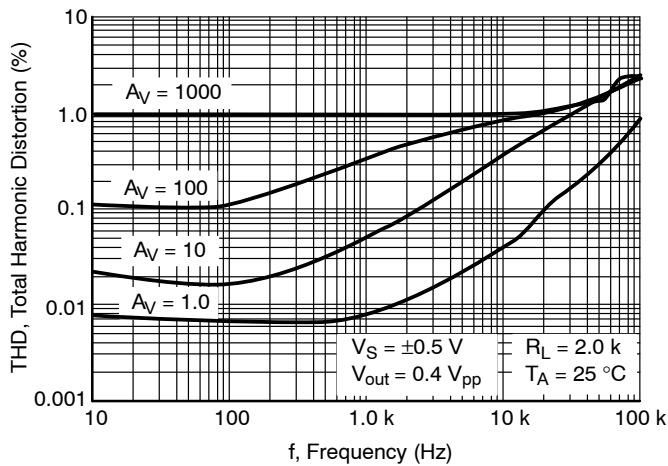


Figure 14. Total Harmonic Distortion vs. Frequency with 1.0 V Supply

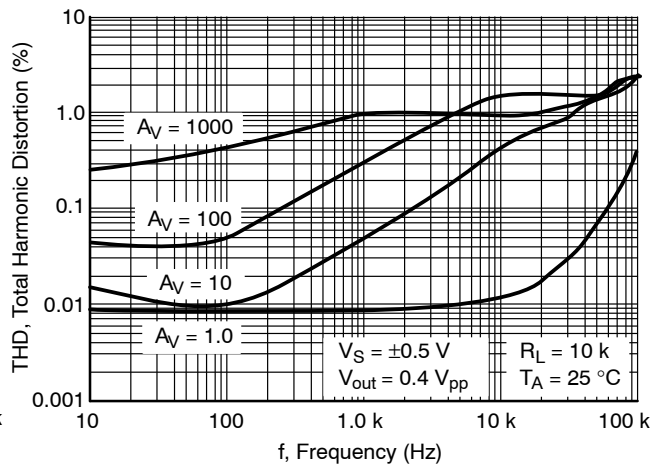


Figure 15. Total Harmonic Distortion vs. Frequency with 1.0 V Supply

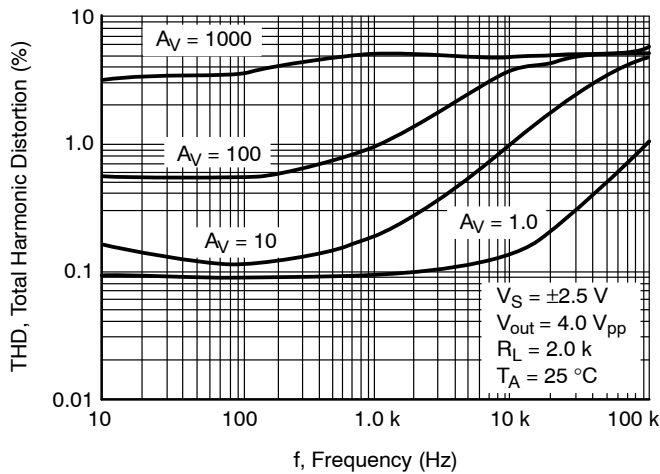


Figure 16. Total Harmonic Distortion vs. Frequency with 5.0 V Supply

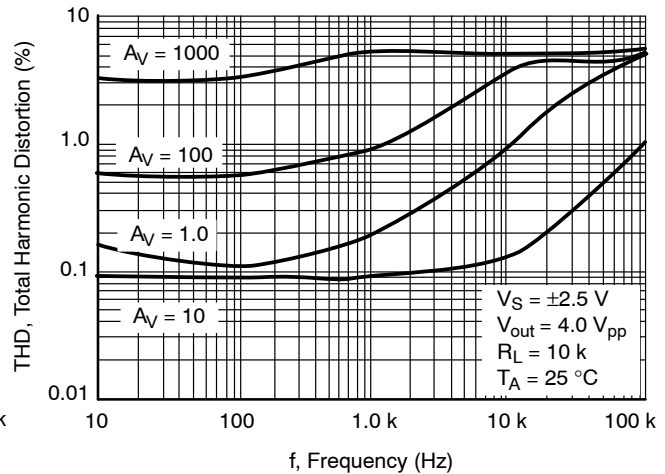


Figure 17. Total Harmonic Distortion vs. Frequency with 5.0 V Supply

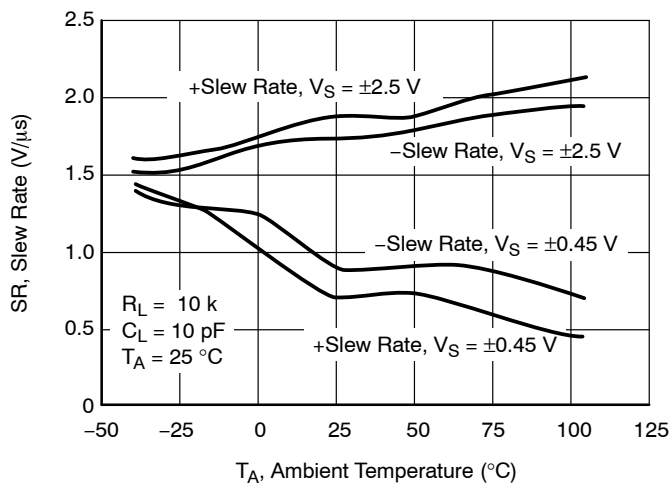


Figure 18. Slew Rate vs. Temperature

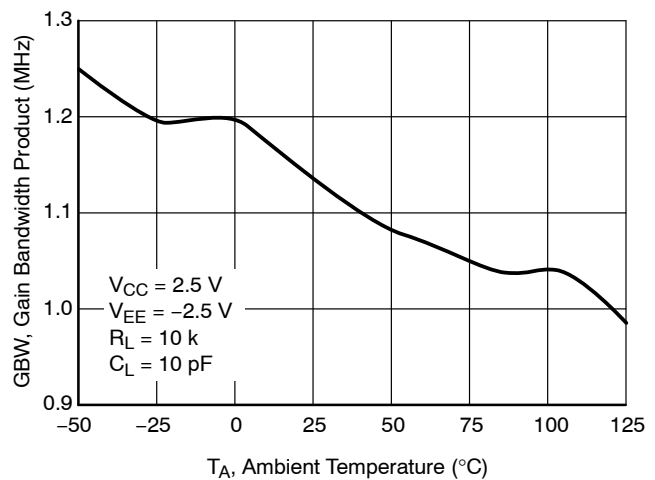


Figure 19. Gain Bandwidth Product vs. Temperature

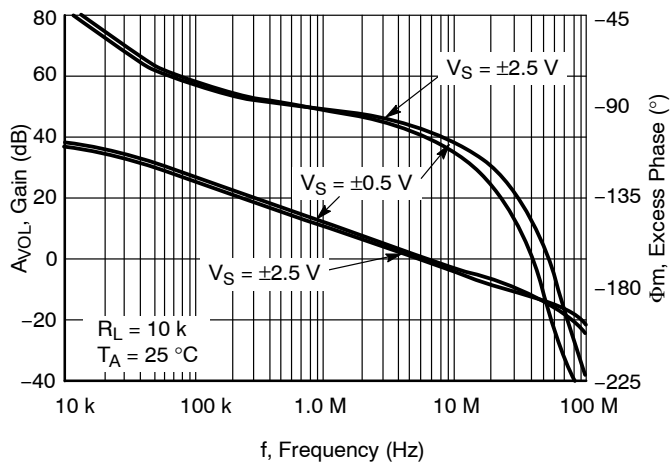


Figure 20. Voltage Gain and Phase vs. Frequency

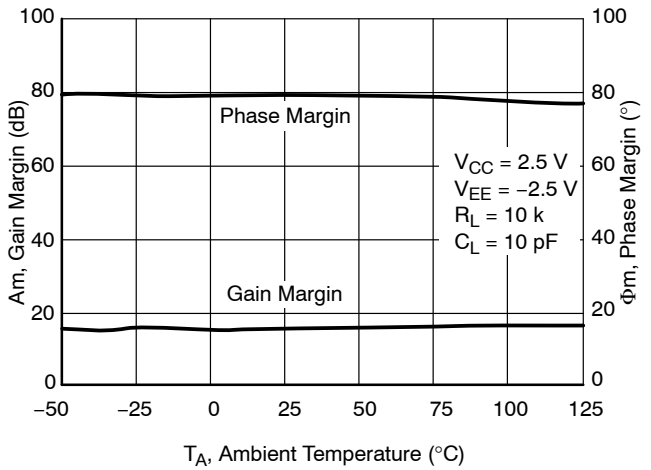


Figure 21. Gain and Phase Margin vs. Temperature

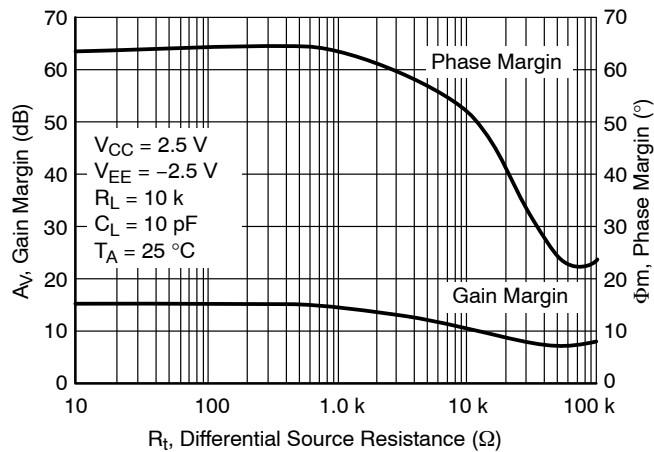


Figure 22. Gain and Phase Margin vs. Differential Source Resistance

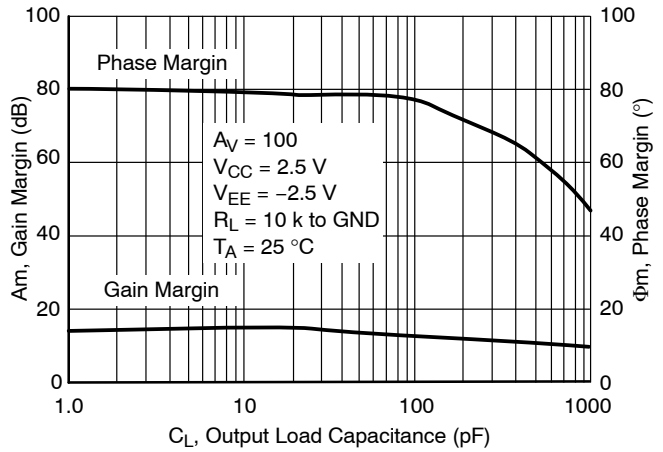


Figure 23. Gain and Phase Margin vs. Output Load Capacitance

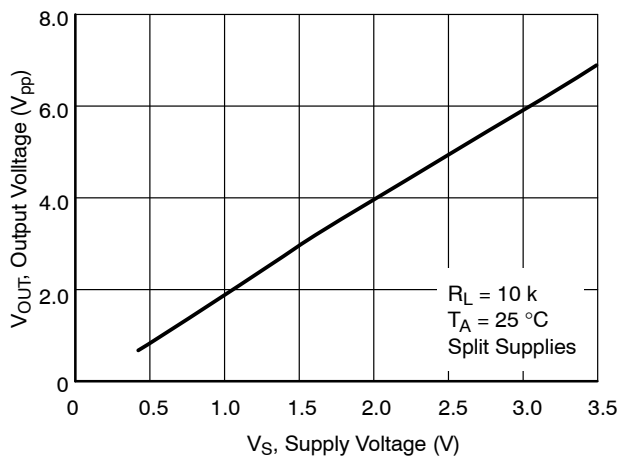


Figure 24. Output Voltage Swing vs. Supply Voltage

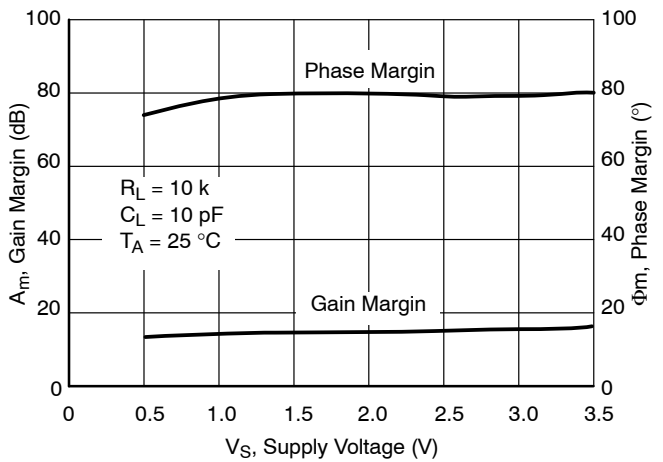


Figure 25. Gain and Phase Margin vs. Supply Voltage

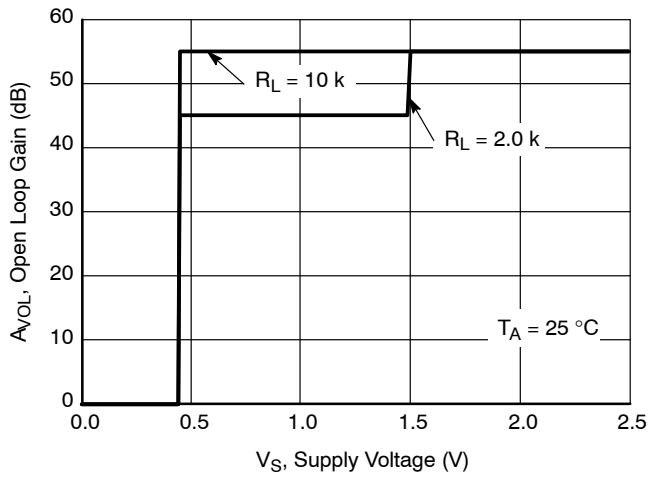


Figure 26. Open Loop Voltage Gain vs. Supply Voltage

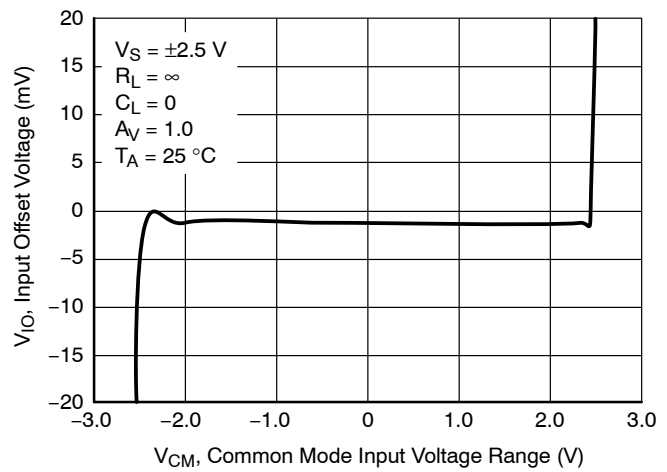


Figure 27. Input Offset Voltage vs. Common Mode Input Voltage Range  $V_S = \pm 2.5\text{ V}$

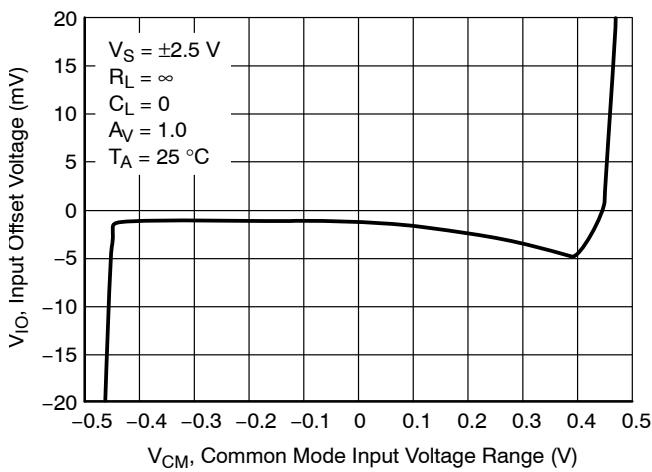


Figure 28. Input Offset Voltage vs. Common Mode Input Voltage Range,  $V_S = \pm 0.45\text{ V}$

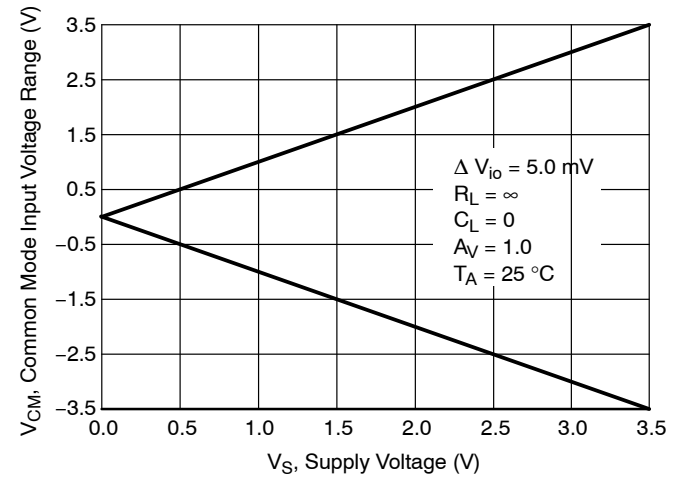


Figure 29. Common-Mode Input Voltage Range vs. Power Supply Voltage

## APPLICATION INFORMATION AND OPERATING DESCRIPTION

## GENERAL INFORMATION

The NCS2001 is an industry first rail-to-rail input, rail-to-rail output amplifier that features guaranteed sub-one voltage operation. This unique feature set is achieved with the use of a modified analog CMOS process that allows the implementation of depletion MOSFET devices. The amplifier has a 1.0 MHz gain bandwidth product, 2.2 V/ $\mu$ s slew rate and is operational over a power supply range less than 0.9 V to as high as 7.0 V.


## INPUTS

The input topology chosen for this device series is unconventional when compared to most low voltage operational amplifiers. It consists of an N-Channel depletion mode differential transistor pair that drives a folded cascade stage and current mirror. This configuration extends the input common mode voltage range to encompass the  $V_{EE}$  and  $V_{CC}$  power supply rails, even when powered from a combined total of less than 0.9 V. Figures 27 and 28 show the input common mode voltage range versus power supply voltage.

The differential input stage is laser trimmed in order to minimize offset voltage. The N-Channel depletion mode MOSFET input stage exhibits an extremely low input bias current of less than 10 pA. The input bias current versus temperature is shown in Figure 4. Either one or both inputs can be biased as low as  $V_{EE}$  minus 300 mV to as high as 7.0 V without causing damage to the device. If the input common mode voltage range is exceeded, the output will not display a phase reversal. If the maximum input positive or negative voltage ratings are to be exceeded, a series resistor must be used to limit the input current to less than 2.0 mA.

The ultra low input bias current of the NCS2001 allows the use of extremely high value source and feedback resistor without reducing the amplifier's gain accuracy. These high value resistors, in conjunction with the device input and printed circuit board parasitic capacitances  $C_{in}$ , will add an additional pole to the single pole amplifier in Figure 30. If low enough in frequency, this additional pole can reduce the phase margin and significantly increase the output settling time. The effects of  $C_{in}$ , can be canceled by placing a zero into the feedback loop. This is accomplished with the addition of capacitor  $C_{fb}$ . An approximate value for  $C_{fb}$  can be calculated by:

$$C_{fb} = \frac{R_{in} \times C_{in}}{R_{fb}}$$

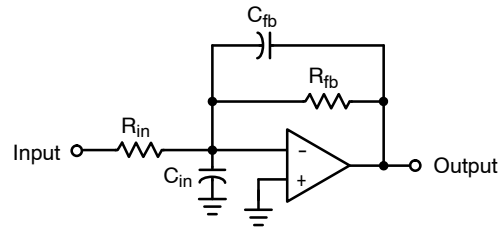


$C_{in}$  = Input and printed circuit board capacitance

Figure 30. Input Capacitance Pole Cancellation

## OUTPUT

The output stage consists of complementary P and N-Channel devices connected to provide rail-to-rail output drive. With a 2.0 k load, the output can swing within 50 mV of either rail. It is also capable of supplying over 75 mA when powered from 5.0 V and 1.0 mA when powered from 0.9 V.

When connected as a unity gain follower, the NCS2001 can directly drive capacitive loads in excess of 820 pF at room temperature without oscillating but with significantly reduced phase margin. The unity gain follower configuration exhibits the highest bandwidth and is most prone to oscillations when driving a high value capacitive load. The capacitive load in combination with the amplifier's output impedance, creates a phase lag that can result in an under-damped pulse response or a continuous oscillation. Figure 32 shows the effect of driving a large capacitive load in a voltage follower type of setup. When driving capacitive loads exceeding 820 pF, it is recommended to place a low value isolation resistor between the output of the op amp and the load, as shown in Figure 31. The series resistor isolates the capacitive load from the output and enhances the phase margin. Refer to Figure 33. Larger values of R will result in a cleaner output waveform but excessively large values will degrade the large signal rise and fall time and reduce the output amplitude. Depending upon the capacitor characteristics, the isolation resistor value will typically be between 50 to 500  $\Omega$ . The output drive capability for resistive and capacitive loads is shown in Figures 2, 3, and 23.



Isolation resistor R = 50 to 500

Figure 31. Capacitance Load Isolation

Note that the lowest phase margin is observed at cold temperature and low supply voltage.

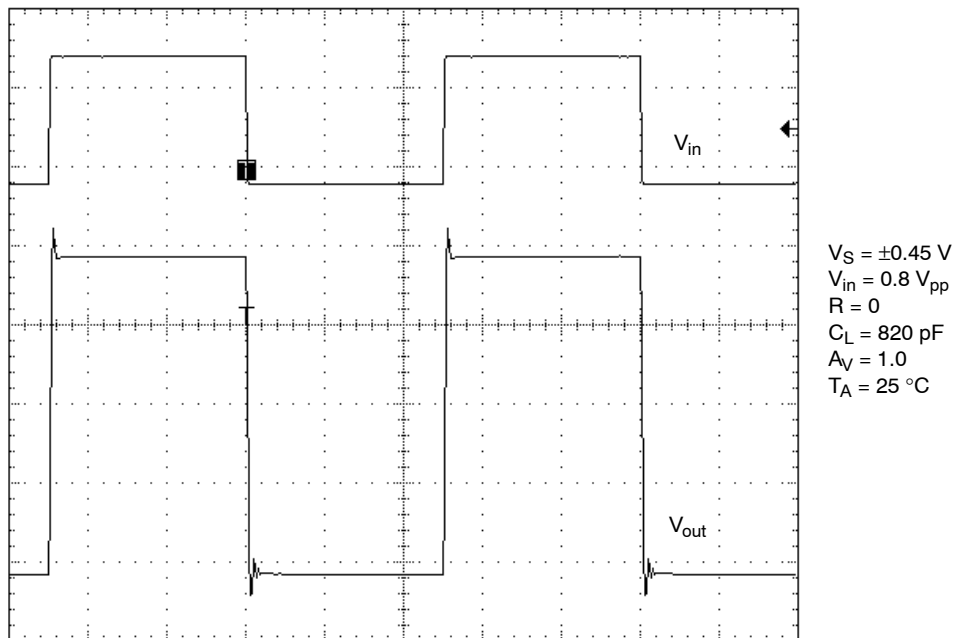


Figure 32. Small Signal Transient Response with Large Capacitive Load

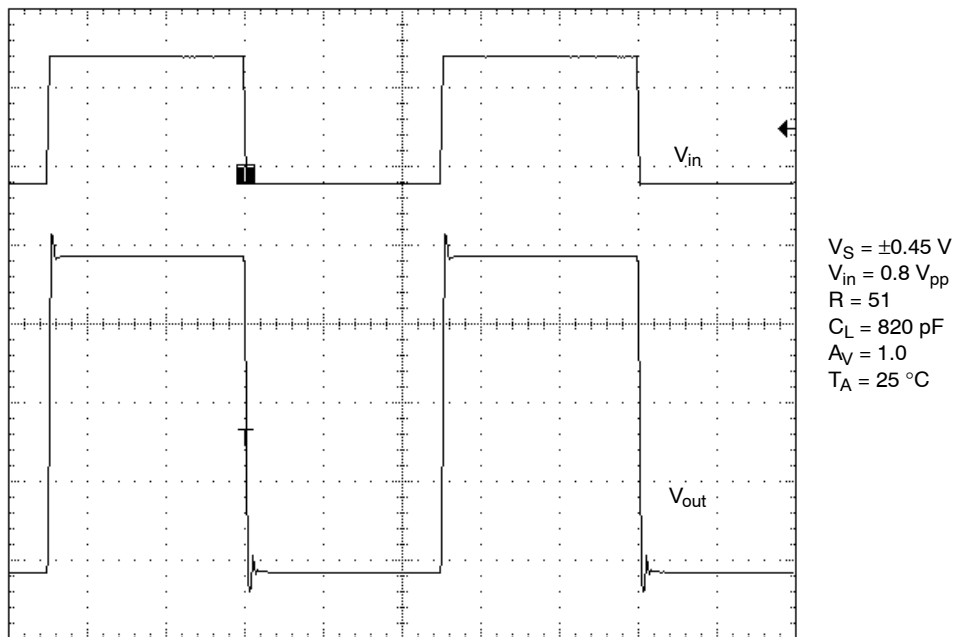


Figure 33. Small Signal Transient Response with Large Capacitive Load and Isolation Resistor

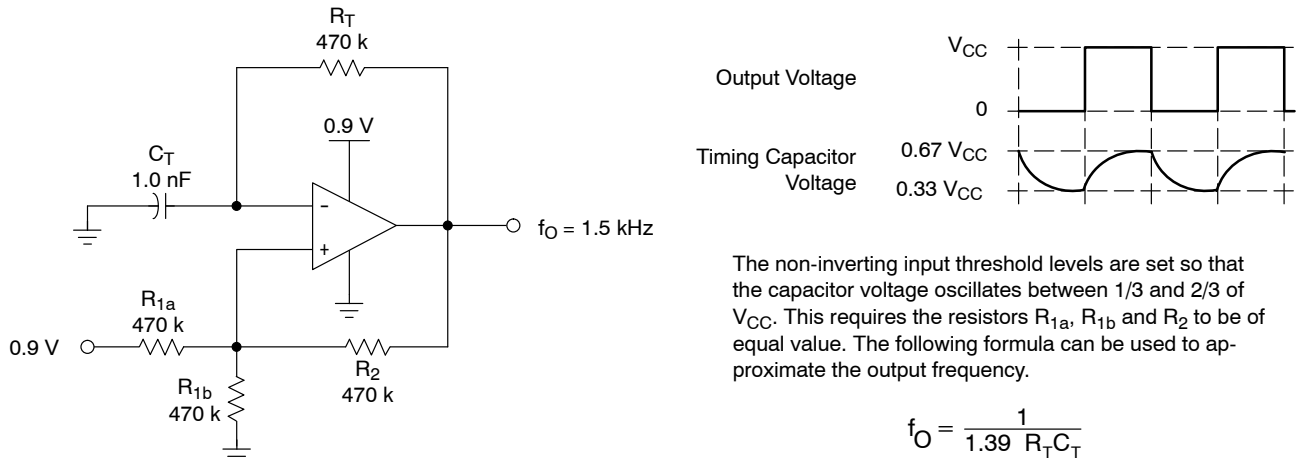


Figure 34. 0.9 V Square Wave Oscillator

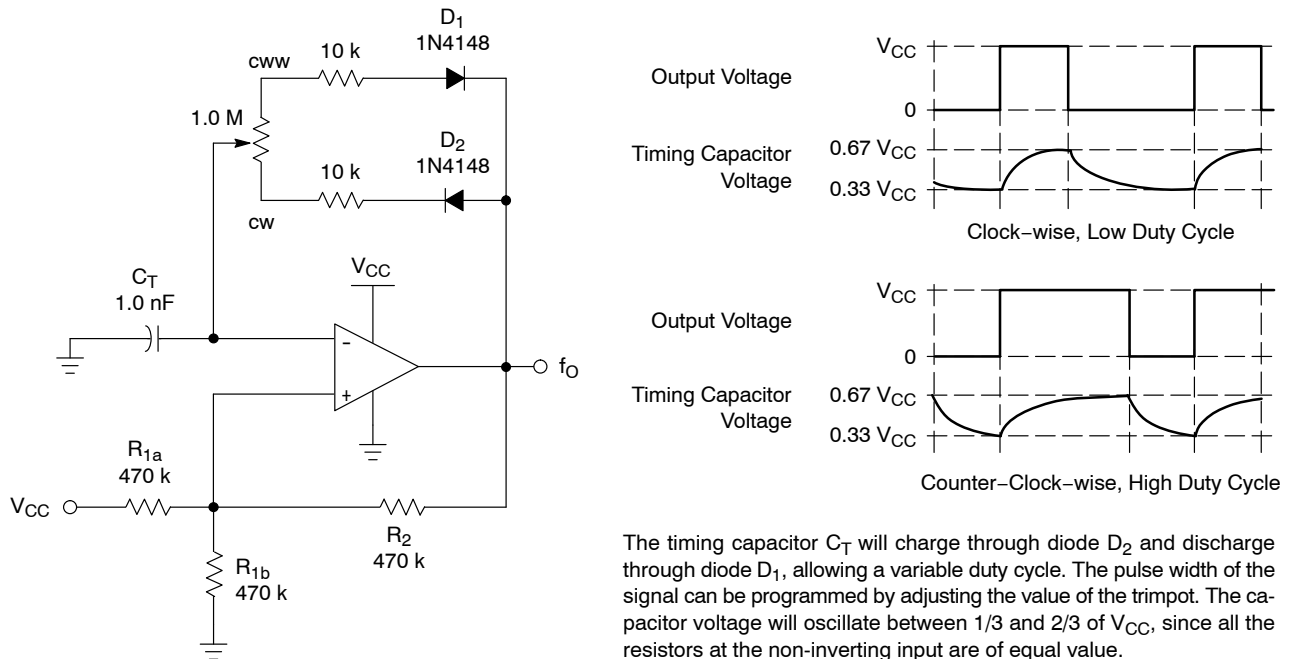


Figure 35. Variable Duty Cycle Pulse Generator



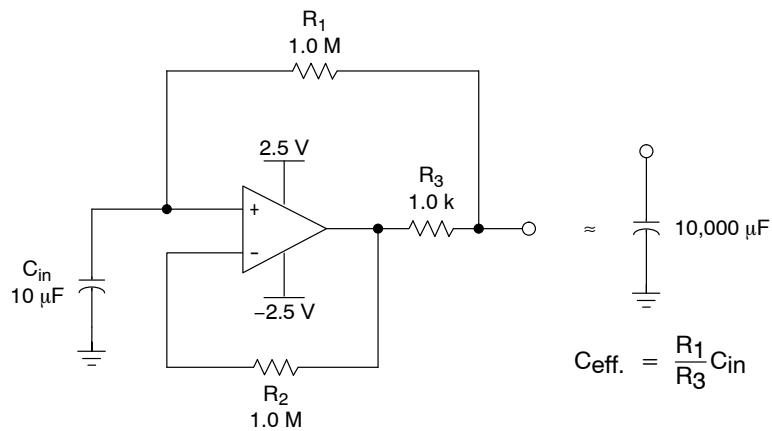


Figure 36. Positive Capacitance Multiplier

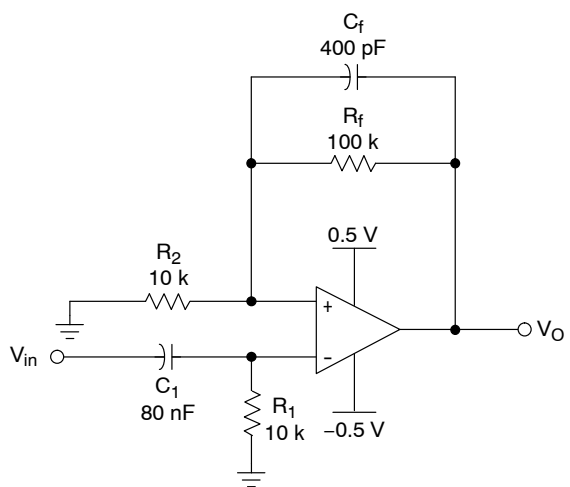

$$f_L = \frac{1}{2 \pi R_1 C_1} \approx 200 \text{ Hz}$$

$$f_H = \frac{1}{2 \pi R_f C_f} \approx 4.0 \text{ kHz}$$

$$A_f = 1 + \frac{R_f}{R_2} = 11$$

Figure 37. 1.0 V Voiceband Filter

## NCS2001, NCV2001


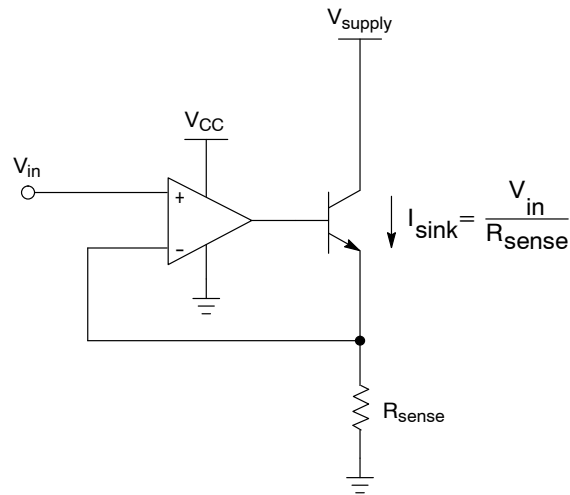


Figure 38. High Compliance Current Sink

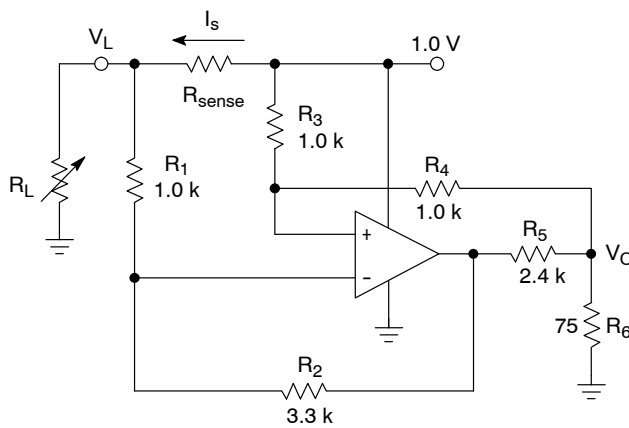

| $I_s$  | $V_O$   |
|--------|---------|
| 435 mA | 34.7 mV |
| 212 mA | 36.9 mV |

For best performance, use low tolerance resistors.

Figure 39. High Side Current Sense

### ORDERING INFORMATION

| Device         | Marking | Package                       | Shipping <sup>†</sup> |
|----------------|---------|-------------------------------|-----------------------|
| NCS2001SN1T1G  | AAG     | TSOP-5 (SOT23-5)<br>(Pb-Free) | 3000 / Tape & 7" Reel |
| NCS2001SN2T1G  | AAH     |                               |                       |
| NCV2001SN2T1G* | MBB     |                               |                       |
| NCS2001SQ2T2G  | AAJ     | SC-88A (SC70-5)<br>(Pb-Free)  |                       |
| NCV2001SQ2T2G* | AAJ     |                               |                       |

<sup>†</sup> For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, [BRD8011/D](#).

\* NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.



## NCS2001, NCV2001

### REVISION HISTORY

| Revision | Description of Changes                                                                                                                                                                                                           | Date       |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| 20       | Updated Marking Diagram for SC-88A package. Replaced package names in diagrams TSOP-5 (SOT23-5) and SC-88A (SC70-5) on the front page. Replaced all mentions SOT23-5 with TSOP-5 and SC70-5 with SC-88A throughout the document. | 10/31/2025 |

This document has undergone updates prior to the inclusion of this revision history table. The changes tracked here only reflect updates made on the noted approval dates.








SCALE 2:1

**SC-88A (SC-70-5/SOT-353)**  
CASE 419A-02  
ISSUE M

DATE 11 APR 2023

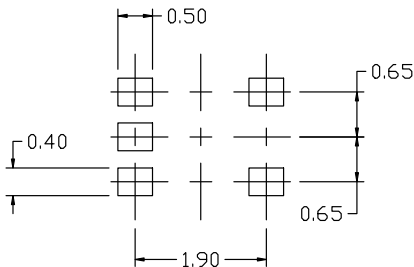

**RECOMMENDED  
MOUNTING FOOTPRINT**

\* For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

## NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS
3. 419A-01 OBSOLETE. NEW STANDARD 419A-02
4. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.1016MM PER SIDE.

| DIM | MILLIMETERS |      |      |
|-----|-------------|------|------|
|     | MIN.        | NOM. | MAX. |
| A   | 0.80        | 0.95 | 1.10 |
| A1  | ---         | ---  | 0.10 |
| A3  | 0.20 REF    |      |      |
| b   | 0.10        | 0.20 | 0.30 |
| c   | 0.10        | ---  | 0.25 |
| D   | 1.80        | 2.00 | 2.20 |
| E   | 2.00        | 2.10 | 2.20 |
| E1  | 1.15        | 1.25 | 1.35 |
| e   | 0.65 BSC    |      |      |
| L   | 0.10        | 0.15 | 0.30 |

**GENERIC MARKING  
DIAGRAM\***


\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

XXX = Specific Device Code

M = Date Code

▪ = Pb-Free Package

(Note: Microdot may be in either location)

**STYLE 1:**

- PIN 1. BASE
2. EMITTER
3. BASE
4. COLLECTOR
5. COLLECTOR

**STYLE 2:**

- PIN 1. ANODE
2. EMITTER
3. BASE
4. COLLECTOR
5. CATHODE

**STYLE 3:**

- PIN 1. ANODE 1
2. N/C
3. ANODE 2
4. CATHODE 2
5. CATHODE 1

**STYLE 4:**

- PIN 1. SOURCE 1
2. DRAIN 1/2
3. SOURCE 1
4. GATE 1
5. GATE 2

**STYLE 5:**

- PIN 1. CATHODE
2. COMMON ANODE
3. CATHODE 2
4. CATHODE 3
5. CATHODE 4

**STYLE 6:**

- PIN 1. EMITTER 2
2. BASE 2
3. EMITTER 1
4. COLLECTOR
5. COLLECTOR 2/BASE 1

**STYLE 7:**

- PIN 1. BASE
2. EMITTER
3. BASE
4. COLLECTOR
5. COLLECTOR

**STYLE 8:**

- PIN 1. CATHODE
2. COLLECTOR
3. N/C
4. BASE
5. EMITTER


**STYLE 9:**

- PIN 1. ANODE
2. CATHODE
3. ANODE
4. ANODE
5. ANODE




Note: Please refer to datasheet for style callout. If style type is not called out in the datasheet refer to the device datasheet pinout or pin assignment.

|                         |                                 |                                                                                                                                                                                  |
|-------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98ASB42984B</b>              | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>SC-88A (SC-70-5/SOT-353)</b> | <b>PAGE 1 OF 1</b>                                                                                                                                                               |



onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.


**TSOP-5 3.00x1.50x0.95, 0.95P**  
**CASE 483**  
**ISSUE P**

DATE 01 APR 2024

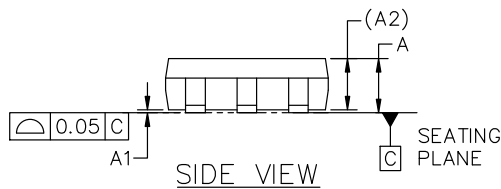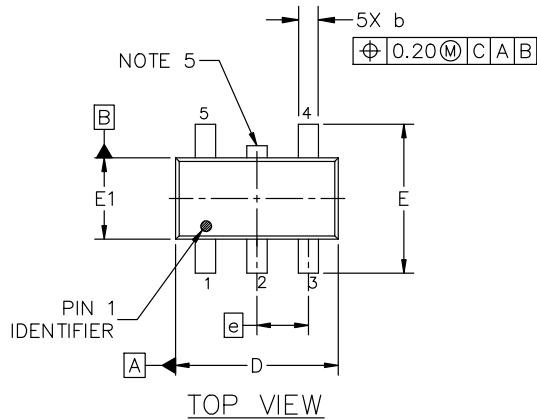

DETAIL "A"  
SCALE 2:1

**GENERIC  
MARKING DIAGRAM\***

**Analog**

**Discrete/Logic**

XXX = Specific Device Code    XXX = Specific Device Code  
A = Assembly Location    M = Date Code  
Y = Year    ■ = Pb-Free Package  
W = Work Week  
■ = Pb-Free Package


(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.


**NOTES:**

1. DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5-2018.
2. ALL DIMENSION ARE IN MILLIMETERS (ANGLES IN DEGREES).
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OF GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE. DIMENSION D.
5. OPTIONAL CONSTRUCTION: AN ADDITIONAL TRIMMED LEAD IS ALLOWED IN THIS LOCATION. TRIMMED LEAD NOT TO EXTEND MORE THAN 0.2 FROM BODY.

| DIM | MILLIMETERS |       |       |
|-----|-------------|-------|-------|
|     | MIN.        | NOM.  | MAX.  |
| A   | 0.900       | 1.000 | 1.100 |
| A1  | 0.010       | 0.055 | 0.100 |
| A2  | 0.950 REF.  |       |       |
| b   | 0.250       | 0.375 | 0.500 |
| c   | 0.100       | 0.180 | 0.260 |
| D   | 2.850       | 3.000 | 3.150 |
| E   | 2.500       | 2.750 | 3.000 |
| E1  | 1.350       | 1.500 | 1.650 |
| e   | 0.950 BSC   |       |       |
| L   | 0.200       | 0.400 | 0.600 |
| θ   | 0°          | 5°    | 10°   |



END VIEW

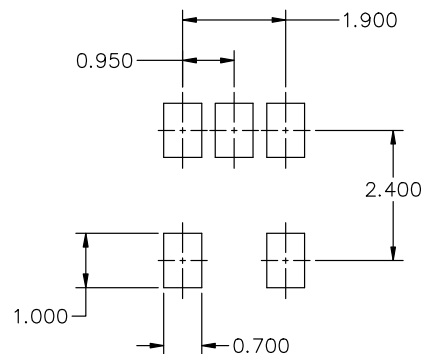
**RECOMMENDED MOUNTING FOOTPRINT\***

\* FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERM/D.

**DOCUMENT NUMBER: 98ARB18753C**

Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.

**DESCRIPTION: TSOP-5 3.00x1.50x0.95, 0.95P**
**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)