

Features


- Halogen Free Available Upon Request By Adding Suffix "-HF"
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS Compliant. See Ordering Information)

Maximum Ratings @ 25°C Unless Otherwise Specified

- Operating Junction Temperature Range: -55°C to +150°C
- Storage Temperature Range: -55°C to +150°C
- Thermal Resistance: 200°C/W Junction to Ambient
- Thermal Resistance: 83.3°C/W Junction to Case


Parameter	Symbol	Rating	Unit
Collector-Base Voltage	BC546	80	V
	BC547	50	
	BC548	30	
Collector-Emitter Voltage	BC546	65	V
	BC547	45	
	BC548	30	
Emitter-Base Voltage	BC546	6	V
	BC547	6	
	BC548	6	
Continuous Collector Current	I_C	0.1	A
Power Dissipation @ $T_A=25^\circ\text{C}$	P_D	0.625	W
Power Dissipation @ $T_C=25^\circ\text{C}$	P_D	1.5	W

Internal Structure

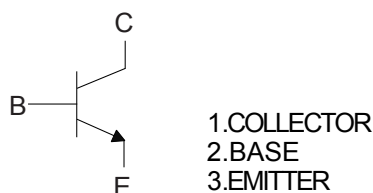

NPN Silicon Amplifier Transistor

TO-92

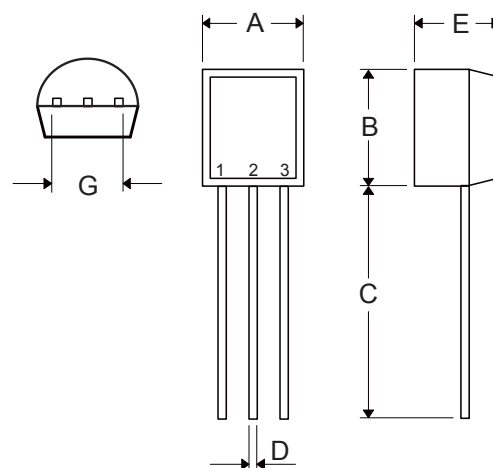

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.169	0.185	4.30	4.70	
B	0.169	0.185	4.30	4.70	
C	0.500	-----	12.70	-----	
D	0.015	0.022	0.38	0.55	
E	0.130	0.146	3.30	3.70	
G	0.095	0.105	2.42	2.67	Straight Lead
	0.173	0.220	4.40	5.60	Bent

Electrical Characteristics @ $T_A=25^\circ\text{C}$ Unless Otherwise Specified

Parameter		Symbol	Min	Typ	Max	Units	Conditions
Collector-Base Breakdown Voltage	BC546	$V_{(BR)CBO}$	80			V	$I_C=100\mu\text{A}, I_E=0$
	BC547		50				
	BC548		30				
Collector-Emitter Breakdown Voltage	BC546	$V_{(BR)CEO}$	65			V	$I_C=1\text{mA}, I_B=0$
	BC547		45				
	BC548		30				
Emitter-Base Breakdown Voltage	BC546	$V_{(BR)EBO}$	6			V	$I_E=10\mu\text{A}, I_C=0$
	BC547		6				
	BC548		6				
Collector Cutoff Current	BC546	I_{CBO}			0.1	μA	$V_{CB}=70\text{V}, I_E=0$
	BC547				0.1	μA	$V_{CB}=50\text{V}, I_E=0$
	BC548				0.1	μA	$V_{CB}=30\text{V}, I_E=0$
Collector Cutoff Current	BC546	I_{CEO}			0.1	μA	$V_{CE}=60\text{V}, I_B=0$
	BC547				0.1	μA	$V_{CE}=45\text{V}, I_B=0$
	BC548				0.1	μA	$V_{CE}=30\text{V}, I_B=0$
Emitter Cutoff Current		I_{EBO}			0.1	μA	$V_{EB}=5\text{V}, I_C=0$
DC Current Gain		h_{FE}	110		800		$V_{CE}=5\text{V}, I_C=2\text{mA}$
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			0.3	V	$I_C=100\text{mA}, I_B=5\text{mA}$
Base-Emitter Saturation Voltage		$V_{BE(sat)}$			1	V	$I_C=100\text{mA}, I_B=5\text{mA}$
Base-Emitter On Voltage		$V_{BE(on)}$	0.55		0.7	V	$V_{CE}=5\text{V}, I_C=2\text{mA}$
					0.77	V	$V_{CE}=5\text{V}, I_C=10\text{mA}$
Output Capacitance		C_{ob}		1.7	4.5	pF	$V_{CB}=10\text{V}, I_E=0, f=1\text{MHz}$
Transition Frequency		f_T	150	300		MHz	$V_{CE}=5\text{V}, I_C=10\text{mA}, f=100\text{MHz}$

Classification of h_{FE}

Rank	A	B	C
Range	110-220	200-450	420-800

Ordering Information

Device	Packing
Part Number-AP	Ammo Packing: 20Kpcs/Carton
Part Number-BP	Bulk: 100Kpcs/Carton

Note : Adding "-HF" Suffix for Halogen Free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.