

N-channel 30 V, 2.8 mΩ typ., 80 A STripFET™ H7 Power MOSFET plus monolithic Schottky in a DPAK package

Datasheet - production data


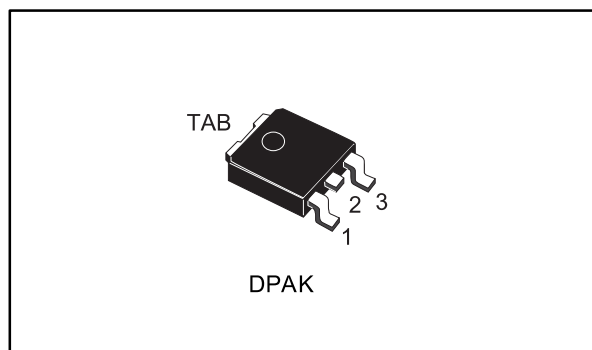


Figure 1: Internal schematic diagram

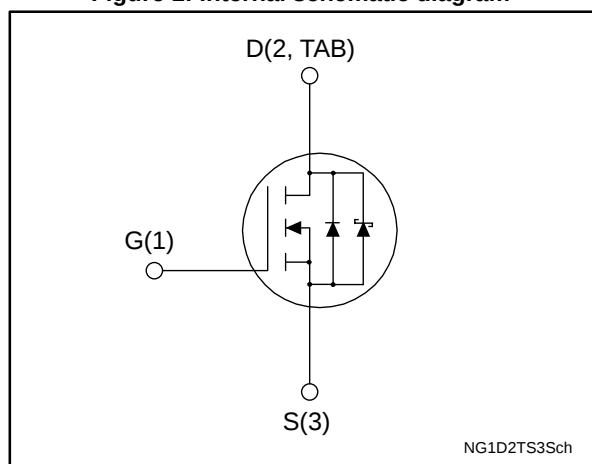

Features

Order code	V _{DS}	R _{DS(on)} max.	I _D	P _{TOT}
STD90NS3LLH7	30 V	3.4 mΩ	80 A	57 W

- Very low on-resistance
- Very low gate charge
- High avalanche ruggedness
- Embedded Schottky diode

Applications

- Switching applications

Description

This device exhibits low on-state resistance and capacitance for improved conduction and switching performance.

Table 1: Device summary

Order code	Marking	Package	Packing
STD90NS3LLH7	90NS3LLH7	DPAK	Tape and reel

Contents

1	Electrical ratings	3
2	Electrical characteristics	4
	2.1 Electrical characteristics (curves).....	5
3	Test circuits	7
4	Package information	8
	4.1 DPAK (TO-252) type A package information.....	8
	4.2 DPAK (TO-252) packing information.....	11
5	Revision history	13

1 Electrical ratings

Table 2: Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{DS}	Drain-source voltage	30	V
V_{GS}	Gate-source voltage	± 20	V
$I_D^{(1)}$	Drain current (continuous) at $T_C = 25\text{ }^\circ\text{C}$	80	A
	Drain current (continuous) at $T_C = 100\text{ }^\circ\text{C}$	65	A
$I_{DM}^{(1)(2)}$	Drain current (pulsed)	320	A
$P_{TOT}^{(1)}$	Total dissipation at $T_C = 25\text{ }^\circ\text{C}$	57	W
T_{stg}	Storage temperature	-55 to 150	$^\circ\text{C}$
T_j	Operating junction temperature		

Notes:

⁽¹⁾This value is rated according to R_{thj-c} and limited by wire bonding

⁽²⁾Pulse width limited by safe operating area.

Table 3: Thermal data

Symbol	Parameter	Value	Unit
$R_{thj-pcb}^{(1)}$	Thermal resistance junction-pcb max	50	$^\circ\text{C/W}$
$R_{thj-case}$	Thermal resistance junction-case max	2.2	

Notes:

⁽¹⁾When mounted on a 1 inch², FR-4 board, 2oz Cu

2 Electrical characteristics

(T_C = 25 °C unless otherwise specified)

Table 4: Static

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V _{(BR)DSS}	Drain-source breakdown voltage	I _D = 1 mA, V _{GS} = 0 V	30			V
I _{DSS}	Zero gate voltage drain current	V _{GS} = 0 V, V _{DS} = 24 V			500	μA
I _{GSS}	Gate-body leakage current	V _{GS} = ±20 V, V _{DS} = 0 V			±100	nA
V _{GS(th)}	Gate threshold voltage	V _{DS} = V _{GS} , I _D = 1 mA	1.2			V
R _{DS(on)}	Static drain-source on-resistance	V _{GS} = 10 V, I _D = 40 A		2.8	3.4	mΩ
		V _{GS} = 4.5 V, I _D = 40 A		4.1	5.3	mΩ

Table 5: Dynamic

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C _{iss}	Input capacitance	V _{DS} = 25 V, f = 1 MHz, V _{GS} = 0 V	-	2110	-	pF
C _{oss}	Output capacitance		-	640	-	
C _{rss}	Reverse transfer capacitance		-	42	-	
Q _g	Total gate charge	V _{DD} = 15 V, I _D = 80 A, V _{GS} = 4.5 V (see Figure 13 : "Test circuit for gate charge behavior")	-	13.7	-	nC
Q _{gs}	Gate-source charge		-	7.5	-	
Q _{gd}	Gate-drain charge		-	3.3	-	
R _g	Gate input resistance	f = 1 MHz, gate DC; Bias = 0, test signal level = 20 mV, I _D = 0 A	0.4	0.7	2	Ω

Table 6: Switching times

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
t _{d(on)}	Turn-on delay time	V _{DD} = 15 V, I _D = 40 A, R _G = 4.7 Ω, V _{GS} = 4.5 V (see Figure 12 : "Test circuit for resistive load switching times" and Figure 17 : "Switching time waveform")	-	26.4	-	ns
t _r	Rise time		-	10.4	-	
t _{d(off)}	Turn-off delay time		-	31.8	-	
t _f	Fall time		-	12.5	-	

Table 7: Source drain diode

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V _{SD} ⁽¹⁾	Forward on voltage	I _{SD} = 2 A, V _{GS} = 0 V	-	0.4	0.7	V
t _{rr}	Reverse recovery time	I _D = 40 A, di/dt = 100 A/μs, V _{DD} = 20 V (see Figure 14 : "Test circuit for inductive load switching and diode recovery times")	-	35.2		ns
Q _{rr}	Reverse recovery charge		-	26.4		nC
I _{RRM}	Reverse recovery current		-	1.5		A

Notes:

⁽¹⁾Pulsed: pulse duration = 300 μs, duty cycle 1.5%

2.1 Electrical characteristics (curves)

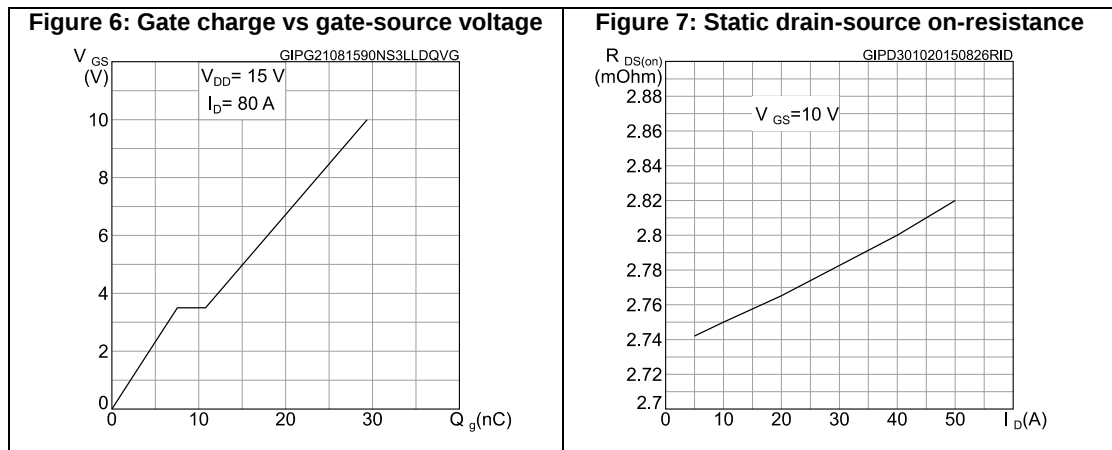
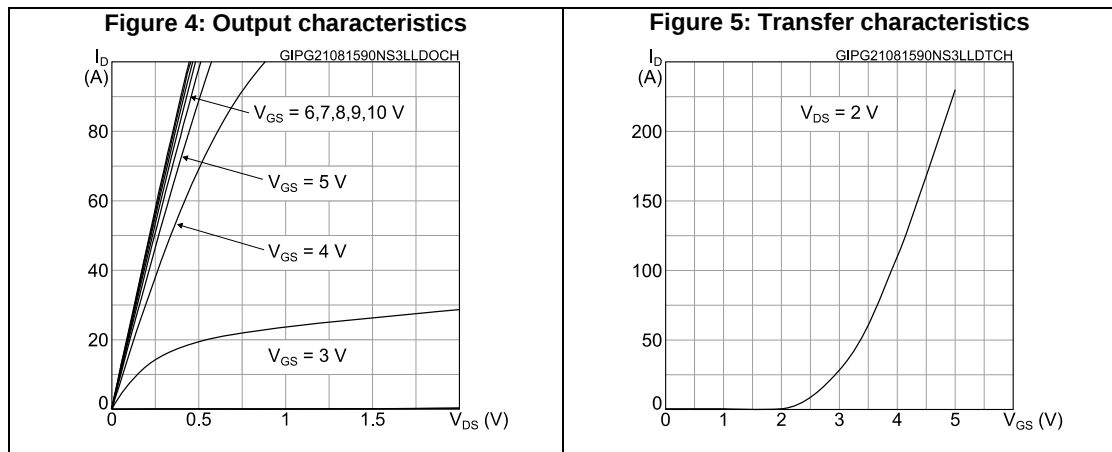
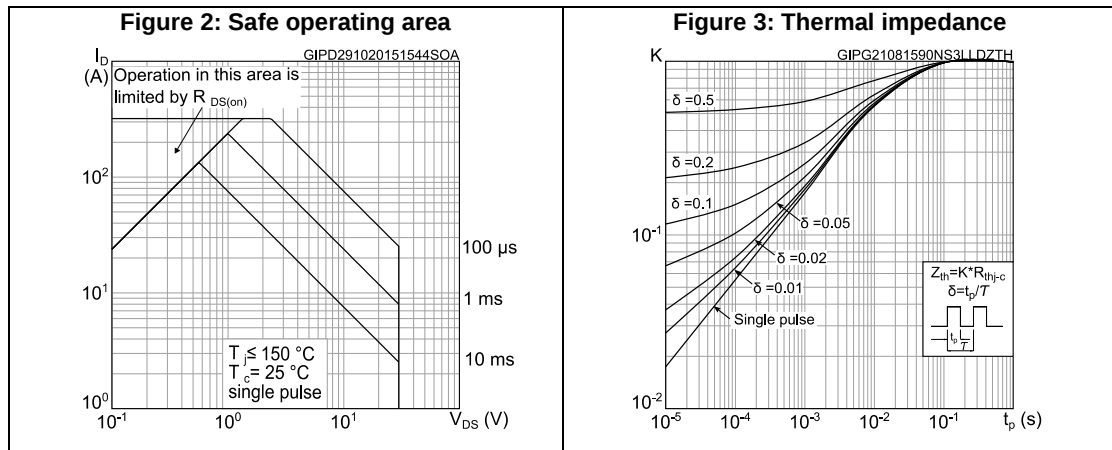


Figure 8: Capacitance variations

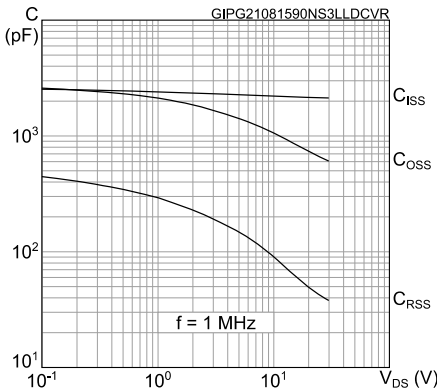


Figure 9: Normalized gate threshold voltage vs temperature

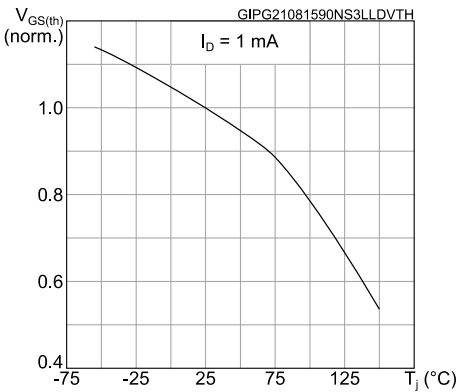


Figure 10: Normalized on-resistance vs temperature


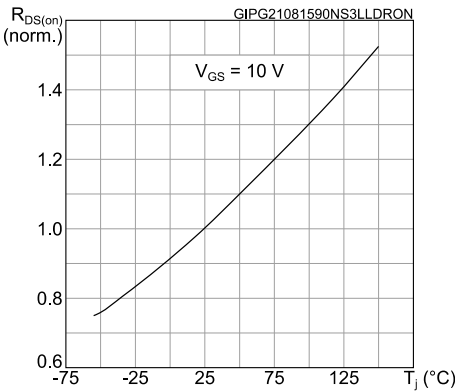


Figure 11: Normalized V(BR)DSS vs temperature

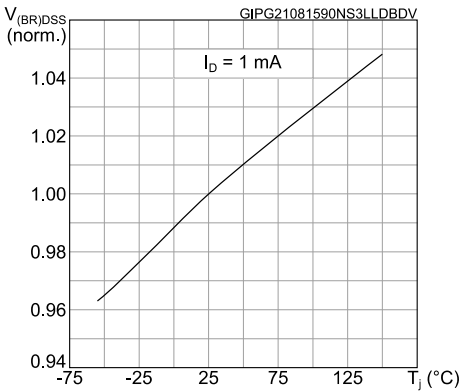

AM01468v1

AM01469v1

AM01470v1

AM01471v1

AM01472c1


AM01473v1

4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

4.1 DPAK (TO-252) type A package information

Figure 18: DPAK (TO-252) type A package outline

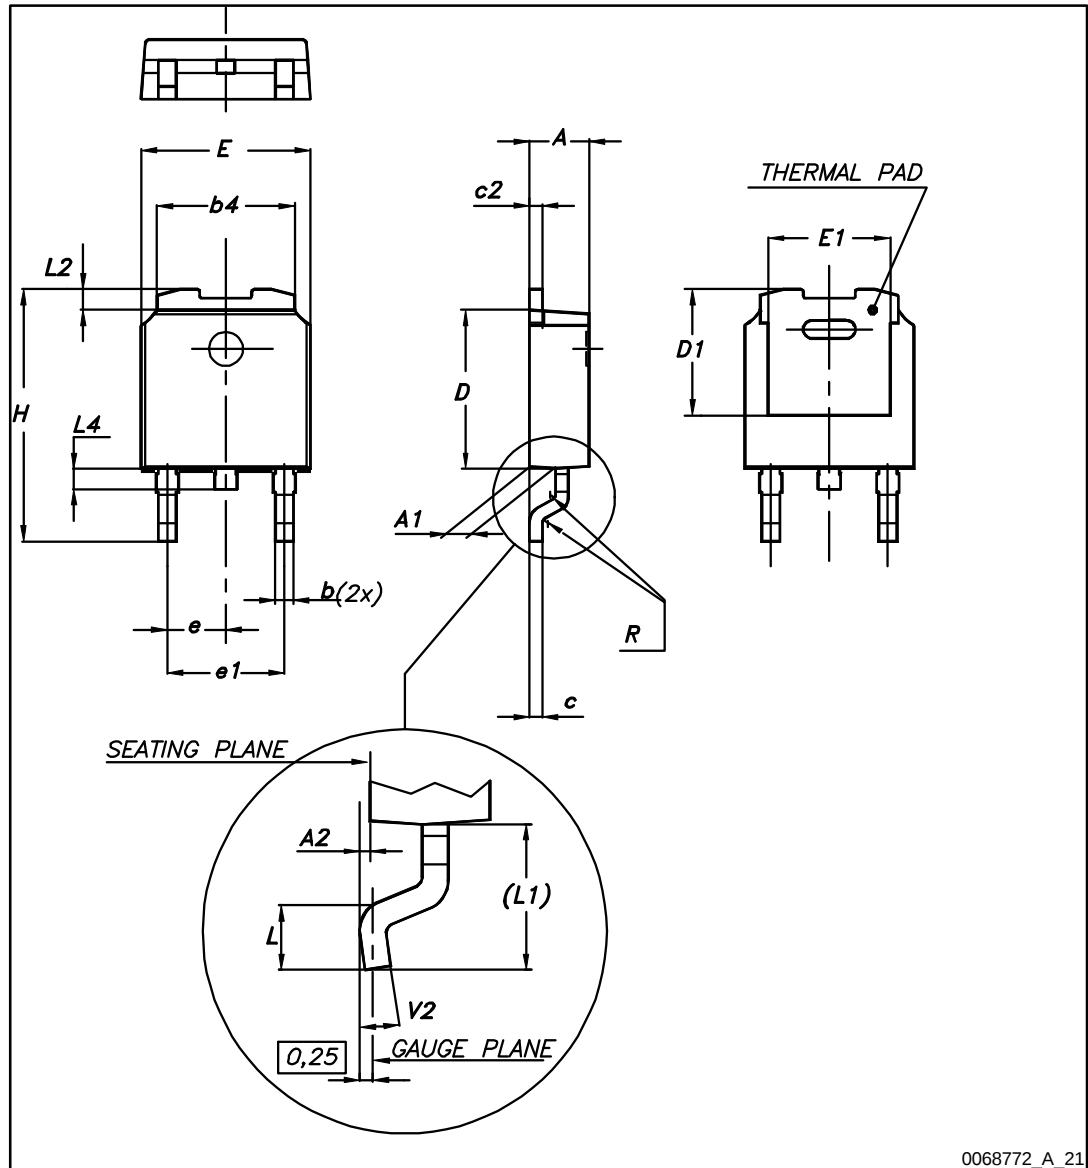


0068772_A_21

Table 8: DPAK (TO-252) type A mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	2.20		2.40
A1	0.90		1.10
A2	0.03		0.23
b	0.64		0.90
b4	5.20		5.40
c	0.45		0.60
c2	0.48		0.60
D	6.00		6.20
D1	4.95	5.10	5.25
E	6.40		6.60
E1	4.60	4.70	4.80
e	2.16	2.28	2.40
e1	4.40		4.60
H	9.35		10.10
L	1.00		1.50
(L1)	2.60	2.80	3.00
L2	0.65	0.80	0.95
L4	0.60		1.00
R		0.20	
V2	0°		8°

Figure 19: DPAK (TO-252) recommended footprint (dimensions are in mm)

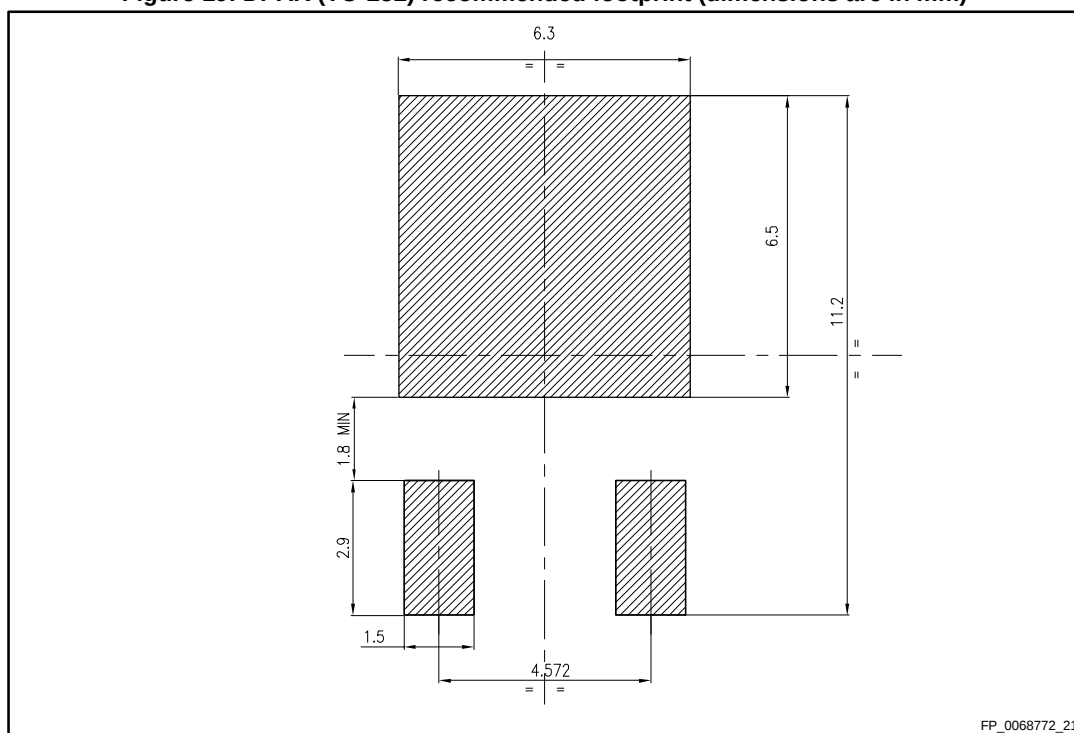

4.2 DPAK (TO-252) packing information

Figure 20: DPAK (TO-252) tape outline

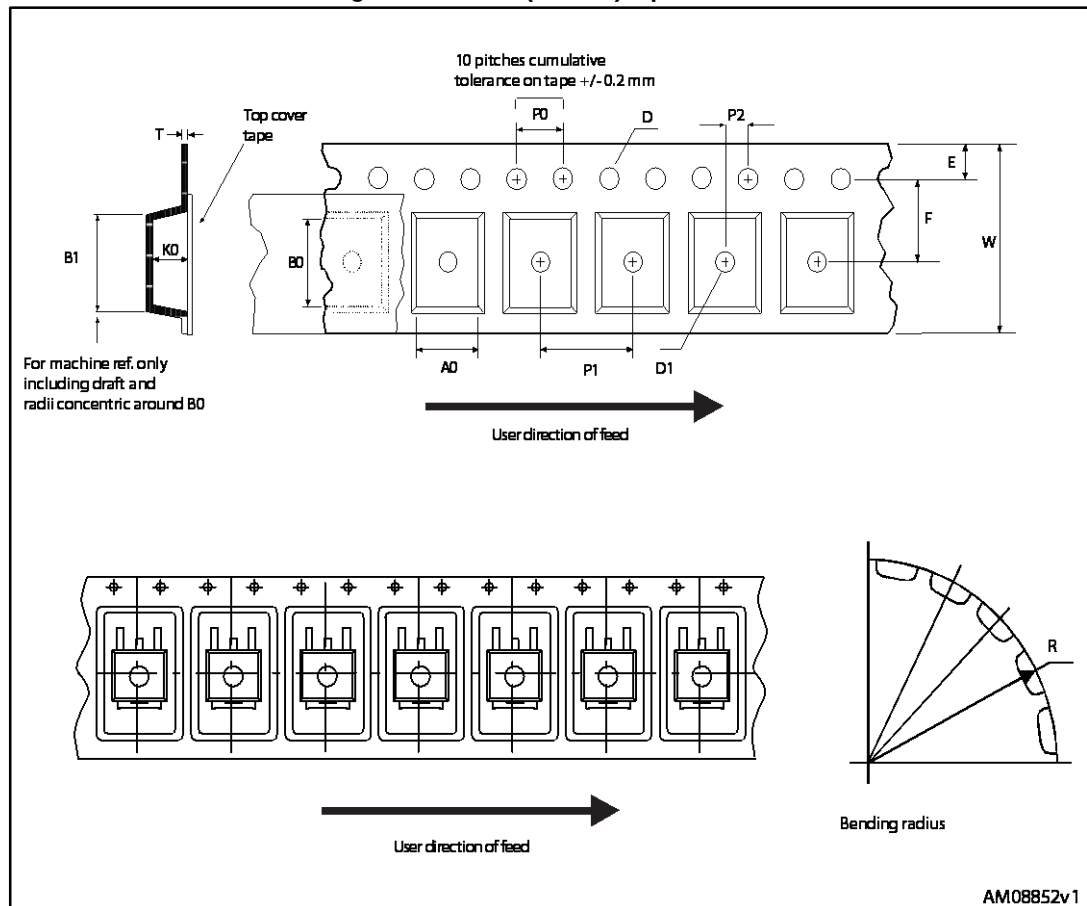


Figure 21: DPAK (TO-252) reel outline

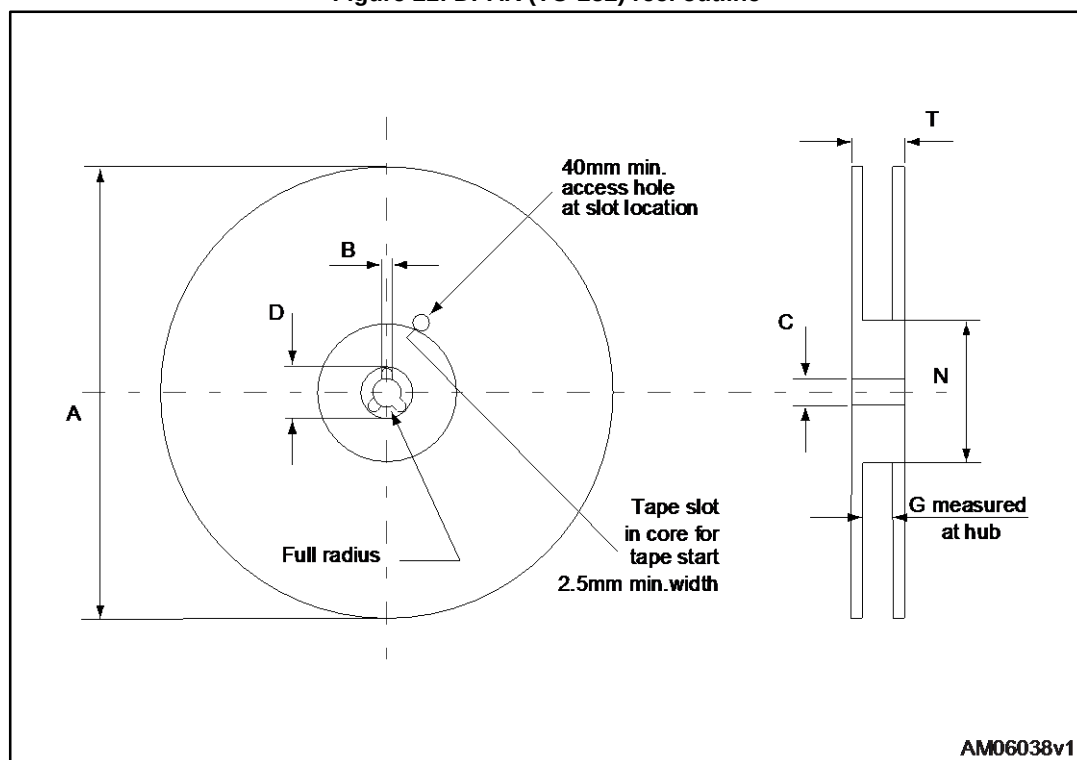


Table 9: DPAK (TO-252) tape and reel mechanical data

Tape			Reel		
Dim.	mm		Dim.	mm	
	Min.	Max.		Min.	Max.
A0	6.8	7	A		330
B0	10.4	10.6	B	1.5	
B1		12.1	C	12.8	13.2
D	1.5	1.6	D	20.2	
D1	1.5		G	16.4	18.4
E	1.65	1.85	N	50	
F	7.4	7.6	T		22.4
K0	2.55	2.75			
P0	3.9	4.1	Base qty.		2500
P1	7.9	8.1	Bulk qty.		2500
P2	1.9	2.1			
R	40				
T	0.25	0.35			
W	15.7	16.3			

5 Revision history

Table 10: Document revision history

Date	Revision	Changes
17-Apr-2014	1	First release.
07-Sep-2015	2	Text and formatting changes throughout document Removed all TO-220 (STP90NS3LLH7) package references and data On cover page: - updated title and Features In section Electrical ratings updated table Absolute maximum ratings In section Electrical characteristics - updated and renamed table Static (was On /off states) - updated tables Dynamic and Source drain diode Added section Electrical characteristics (curves) Updated and renamed section Package information (was Package mechanical data)
29-Oct-2015	3	Updated title and features in cover page. Updated Table 2: "Absolute maximum ratings", Table 5: "Dynamic" and Figure 2: "Safe operating area". Minor text changes.
10-Feb-2016	4	Document status promoted from preliminary to production data.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2016 STMicroelectronics – All rights reserved