

Description

The AP3041 is a current mode high-voltage low-side channel MOSFET controller, which is ideal for boost regulators. It contains all the features needed to implement single-ended primary topology DC/DC converters.

The input voltage of AP3041 ranges from 5V to 27V. Its operation frequency is adjustable from 100kHz to 1MHz.


The AP3041 has UVLO (Undervoltage Lockout) circuit. It uses two external resistors to set the UVLO voltage. The AP3041 also has an over output voltage protection to limit the output voltage. The OVP voltage can be set through external resistors. If the output voltage is higher than the OVP high threshold point, it will disable the driver and the system is latched up. The output short-circuit protection as well as LED low side short to ground detection function can be applied in system.

The AP3041 has other protection functions, such as LED short protection, LED high side short to ground protection, diode short protection, overcurrent protection, overtemperature protection and so on.

The AP3041 is available in SOIC-16 package.

Pin Assignments

(Top View)

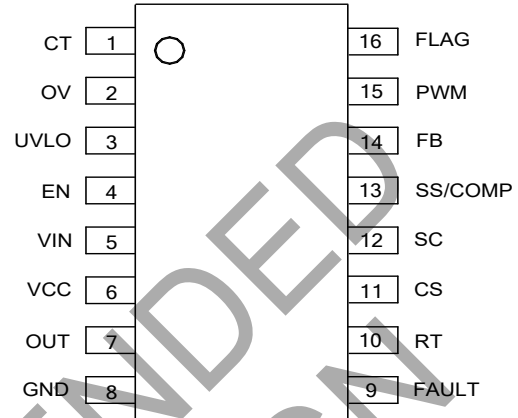

SOIC-16

Features

- Input Voltage Range: 5V to 27V
- 1A Peak and 10V MOSFET Gate Driver
- 20ns Quick MOSFET Gate Driver
- Duty Cycle Limit of 90%
- Programmable UVLO
- PWM Dimming Control
- Programmable Overvoltage Protection
- LED Open Protection
- LED Short-Circuit Protection
- Diode Short-Circuit Protection
- Output Short-Circuit Protection
- LED Low-Side Short to Ground Detection
- OV Pin Undervoltage Protection
- Overcurrent Protection
- Programmable Slope Compensation
- Adjustable Soft-Start
- Adjustable Protection Delay
- Fault Status Indication
- Adjustable Operation Frequency from 100kHz to 1MHz
- Overtemperature Protection
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **For automotive applications requiring specific change control (i.e. parts qualified to AEC-Q100/101/104/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please [contact us](#) or your local Diodes representative.**

<https://www.diodes.com/quality/product-definitions/>

Applications

- LED lighting
- LED TVs
- LCD display modules

Notes:


1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

[illegible]

Pin Descriptions

Pin Number	Pin Name	Function
1	CT	Capacitor Setting Shutdown Delay Time
2	OV	Over Output Voltage Protection Pin
3	UVLO	Two resistors connected from this pin to GND and the power supply respectively is used to set startup and shutdown level.
4	EN	Enable Pin
5	VIN	Input Supply Pin. This pin must be locally bypassed.
6	VCC	This pin should be bypassed to GND with a ceramic capacitor.
7	OUT	Connect this pin to the gate of external MOSFET, the gate driver has 1A peak current capability.
8	GND	Ground
9	FAULT	This pin can be used to drive the external MOSFET. The logic of the driver signal is controlled by that of PWM pin and the signal phase of them is the same. This pin is pulled to ground under fault condition of OVP, UVLO, OTP, diode short circuit and LED short circuit.
10	RT	An external resistor connected from this pin to GND is used to set the operating frequency.
11	CS	Sense switch current pin, which is used for current mode control and for current limit. The current limit voltage is 500mV.
12	SC	Slope compensation for current sense. A resistor between SC and GND will program the slope compensation.
13	SS/COMP	An external soft-start time capacitor is placed from this pin to GND and is charged by an internal 20μA current source to control regulator soft-start time. Compensation pin. This pin is the output of the internal error amplifier.
14	FB	Voltage Feedback Pin. The reference voltage is 500mV.
15	PWM	This pin can be connected to current matched chip and receives error signal used to shut down the system.
16	FLAG	Fault Condition Output Pin. When the output is in short-circuit condition, the FLAG outputs logic low to shut down the power path. Please refer to the application circuit.

Functional Block Diagram

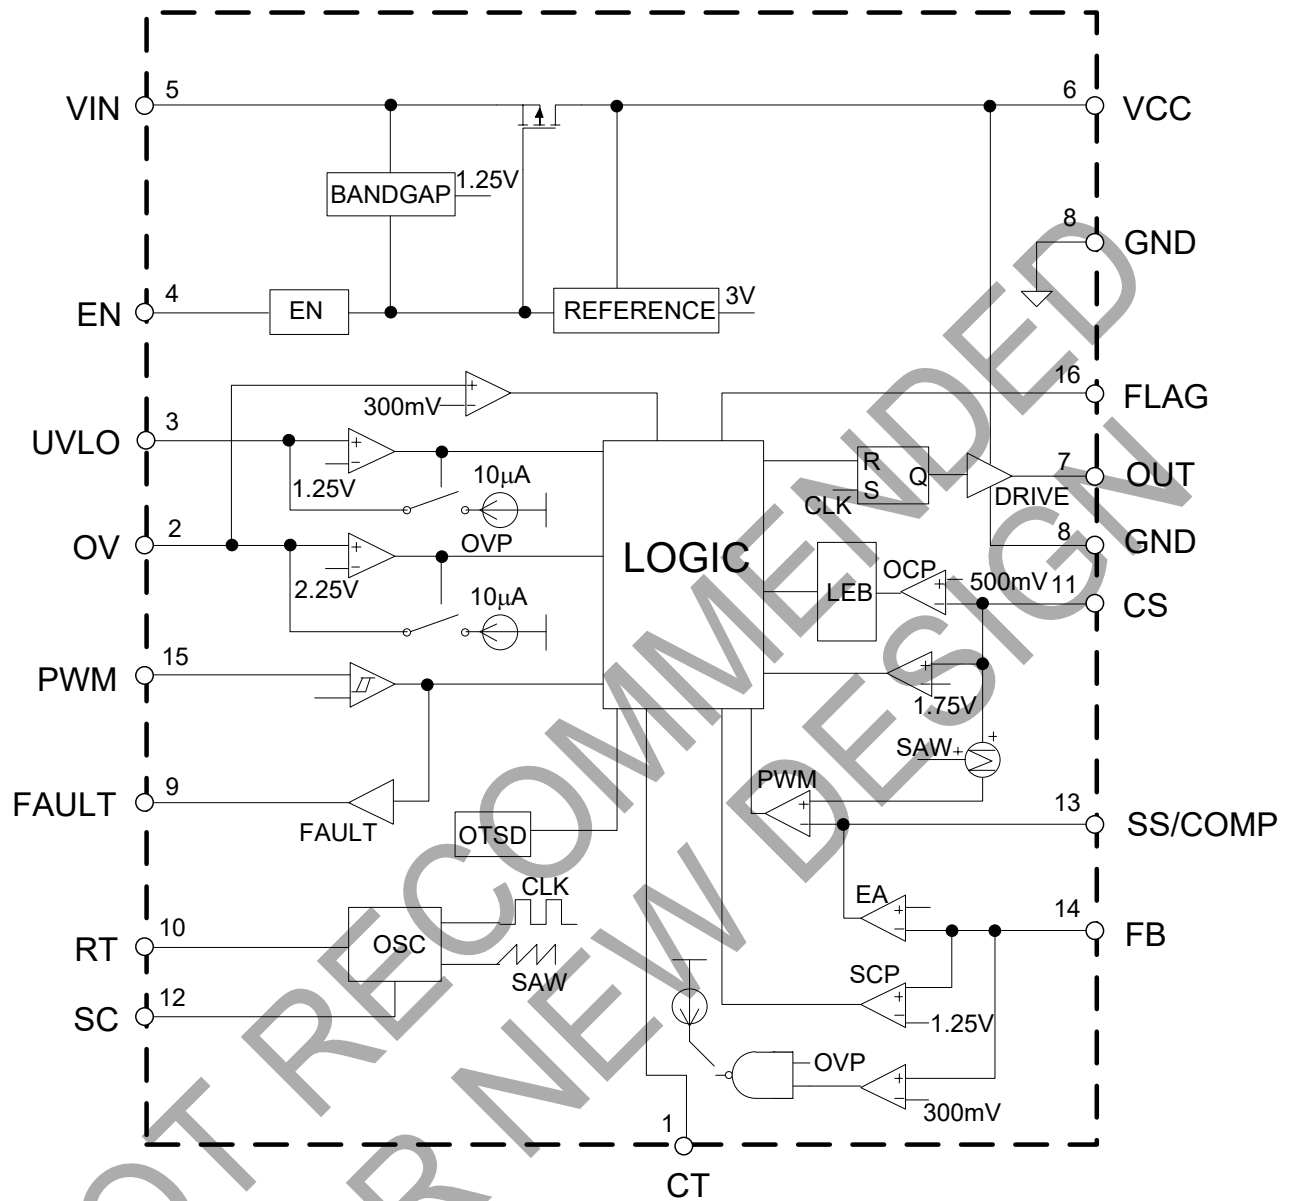

Absolute Maximum Ratings (Note 4)

Symbol	Parameter	Value	Unit
V _{IN}	Input Voltage	30	V
V _{CC}	VCC Pin Voltage	20	V
V _{OUT}	OUT Pin Voltage	20	V
V _{FAULT}	FAULT Pin Voltage	20	V
V _{FB}	FB Pin Voltage	20	V
V _{UVLO}	UVLO Pin Voltage	7	V
V _{CS}	CS Pin Voltage	20	V
V _{SC}	SC Pin Voltage	7	V
V _{FLAG}	FLAG Pin Voltage	7	V
V _{SS/COMP}	SS/COMP Pin Voltage	7	V
V _{RT}	RT Pin Voltage	7	V
V _{PWM}	PWM Pin Voltage	7	V
V _{EN}	EN Pin Voltage	30	V
V _{OV}	OV Pin Voltage	7	V
θ _{JA}	Thermal Resistance (Junction to Ambient, No Heatsink, Free Air)	82	°C/W
T _J	Operating Junction Temperature	+150	°C
T _{STG}	Storage Temperature	-65 to +150	°C
T _{LEAD}	Lead Temperature (Soldering, 10s)	+260	°C
—	ESD (Human Body Model)	2000	V
—	ESD (Machine Model)	200	V

Note: 4. Stresses greater than those listed under *Absolute Maximum Ratings* can cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to *Absolute Maximum Ratings* for extended periods can affect device reliability.

Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V _{IN}	Input Voltage	5	27	V
f	Operating Frequency	0.1	1	MHz
T _J	Operating Temperature Range	-40	+85	°C

Electrical Characteristics ($V_{CC} = 12V$, $V_{EN} = 3.3V$, $T_A = +25^\circ C$, unless otherwise specified.)


Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{IN}	Input Voltage	—	5	—	27	V
V_{FB}	Feedback Voltage	—	490	500	510	mV
I_{CC}	Supply Current	$V_{FB} = V_{IN}$, No Switching	—	1.5	5	mA
I_Q	Shutdown Supply Current	$V_{EN} = 0$	—	1	2	μA
V_{CC}	VCC Pin Voltage	$11V \leq V_{IN} \leq 27V$	9.5	10.0	10.5	V
		$5V \leq V_{IN} \leq 10V$, $I_{CC} = 5mA$	$V_{IN}-0.5$	—	—	V
I_{CC-LIM}	VCC Pin Current Limit	—	—	35	—	mA
V_{CC-HI}	VCC Pin UVLO Rising Threshold	—	—	4.7	—	V
V_{CC-HYS}	VCC Pin UVLO Falling Hysteresis	—	—	300	—	mV
f_{OSC}	Oscillator Frequency	—	0.1	—	1	MHz
V_{SC_PK}	SC Peak Voltage	—	530	—	680	mV
V_{UVLO}	UVLO Threshold	—	1.20	1.25	1.30	V
$I_{UVLO-HYS}$	UVLO Hysteresis Current Source	—	—	10	—	μA
V_{CS}	Current Limit Threshold Voltage	—	0.48	0.5	0.52	V
V_{RT}	RT Voltage	—	1.20	1.25	1.30	V
G_V	Error Amplifier Voltage Gain	—	—	680	—	V/V
G_S	Error Amplifier Transconductance	—	—	500	—	$\mu A/V$
V_{EH}	EN Pin Threshold Voltage	—	2.5	—	—	V
V_{EL}		—	—	—	0.5	
V_{IH}	PWM Pin Threshold Voltage	—	2.5	—	—	V
V_{IL}		—	—	—	0.5	
V_{OV}	OV Threshold	—	—	2.25	—	V
I_{OV-HYS}	OV Hysteresis Current Source	—	—	10	—	μA
V_{FB_LOW}	LED- Short to GND Detection Level	—	—	0.3	—	V
V_{FB_HIGH}	LED+ Short to LED-Detection Level	—	—	1.25	—	V
V_{OV_LOW}	LED+ Short to GND Detection Level	—	—	0.3	—	V
V_{CS_HIGH}	Diode Short Detection Level	—	—	1.75	—	V
I_{CT}	CT Current Source	—	—	5	—	μA
V_{CT}	CT Threshold Voltage	—	—	2.6	—	V

Electrical Characteristics ($V_{CC} = 12V$, $V_{EN} = 3.3V$, $T_A = +25^{\circ}C$, unless otherwise specified.) (continued)


Symbol	Parameter	Conditions	Min	Typ	Max	Unit
D_{MAX}	Maximum Duty Cycle	$f = 200kHz$	80	90	—	%
I_{SS}	Soft-Start Current Source	—	16	22	28	μA
t_{RISE}	OUT Pin Rising Time	$C_{OUT} = 1nF$	—	20	—	ns
t_{FALL}	OUT Pin Falling Time	$C_{OUT} = 1nF$	—	20	—	
V_{OUT-H}	OUT High Voltage Level ($V_{CC}-V_{OUT}$)	$I_{OUT} = 50mA$	—	0.25	0.75	V
V_{OUT-L}	OUT Low Voltage Level (V_{OUT})	$I_{OUT} = 50mA$	—	0.25	0.75	V
t_{RISE}	FAULT Pin Rising Time	$C_{FAULT} = 1nF$	—	100	—	ns
t_{FALL}	FAULT Pin Falling Time	$C_{FAULT} = 1nF$	—	100	—	
$V_{FAULT-H}$	FAULT High Voltage Level ($V_{CC}-V_{FAULT}$)	$I_{FAULT} = 10mA$	—	0.25	0.75	V
$V_{FAULT-L}$	FAULT Low Voltage Level	$I_{FAULT} = 10mA$	—	0.25	0.75	V
t_D	FAULT Minimum Pulse Width	Oscillator Frequency = 200kHz	—	20	—	μs
V_{FLAG-H}	FLAG High Voltage Level	$I_{FLAG} = 500\mu A$	—	2	—	V
V_{FLAG-L}	FLAG Low Voltage Level	$I_{FLAG} = 500\mu A$	—	0.25	0.75	V
T_{OTSD}	Thermal Shutdown Temperature	—	—	+160	—	$^{\circ}C$
T_{HYS}	Thermal Shutdown Hysteresis	—	—	+20	—	$^{\circ}C$

Performance Characteristics


LED Current vs. PWM Duty

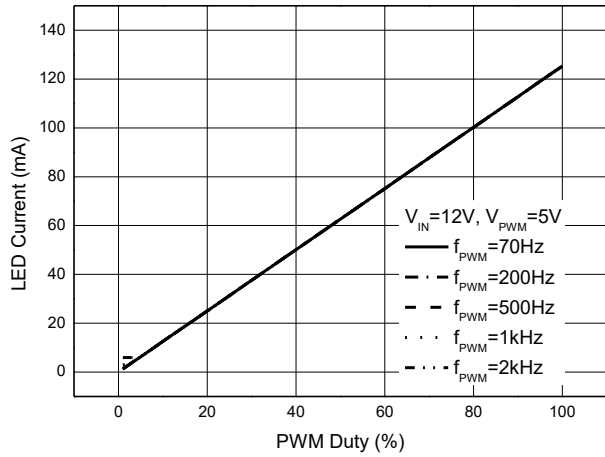


Frequency vs. R_T

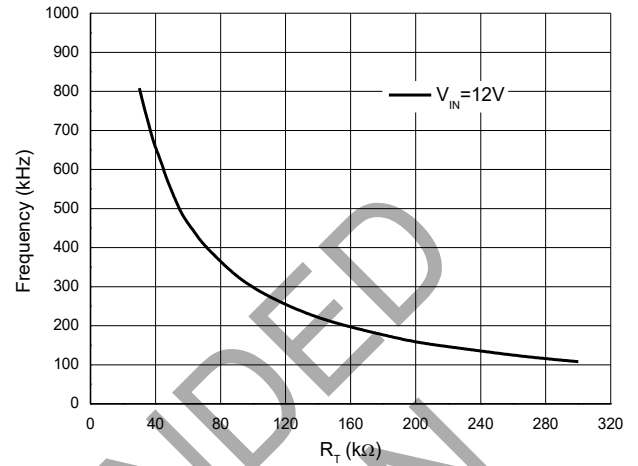


V_{FB} vs. Temperature

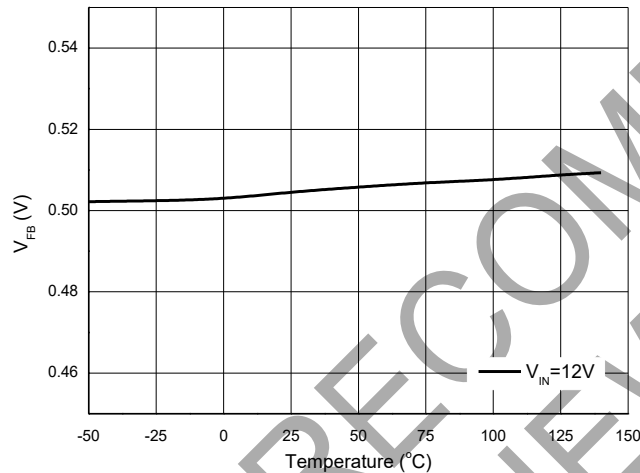


Supply Current vs. Temperature

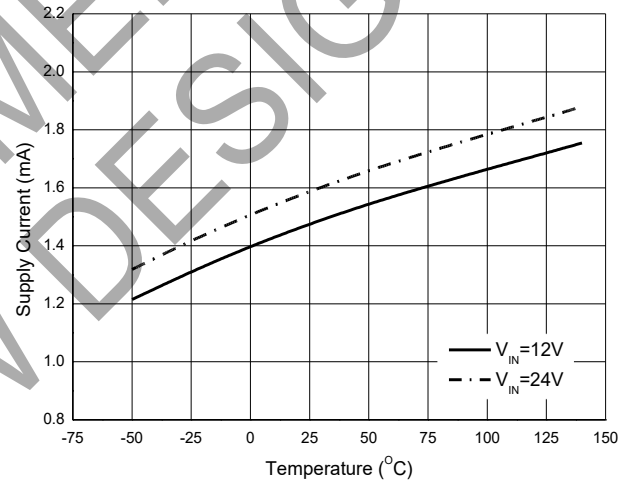

Supply Current vs. Temperature

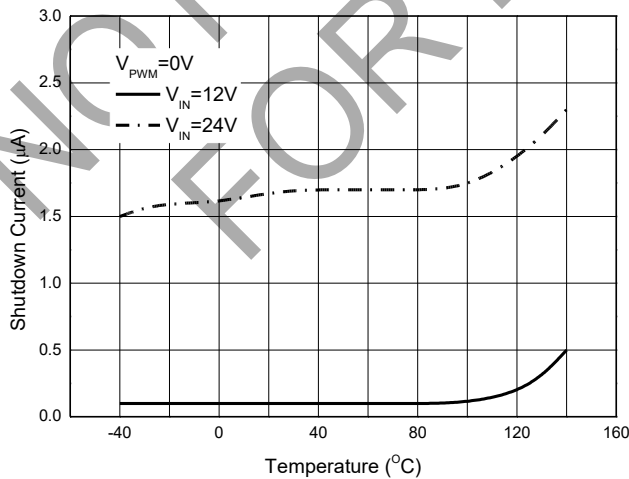


Frequency vs. Temperature

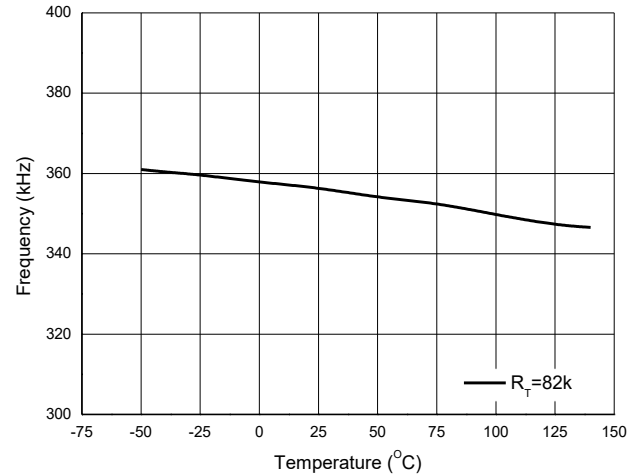


Performance Characteristics (continued)


V_{CC} vs. Input Voltage

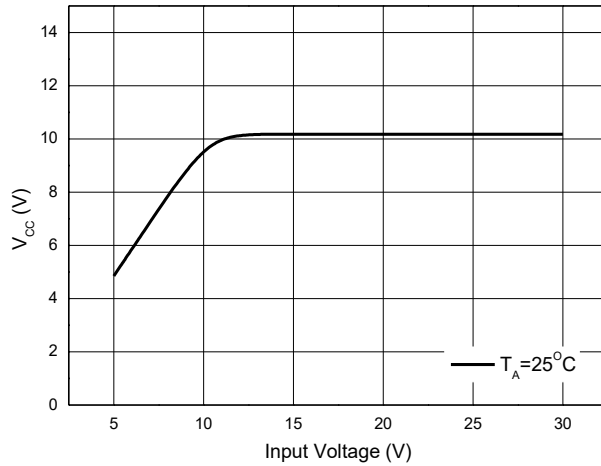


CS Threshold Voltage vs. Temperature

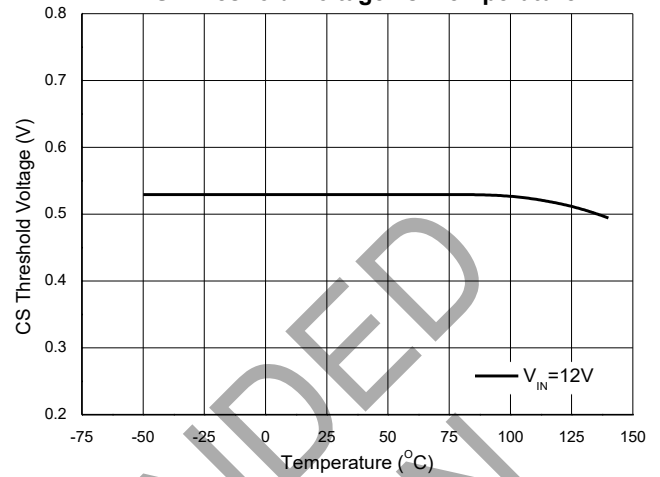


EN Threshold Voltage vs. Temperature

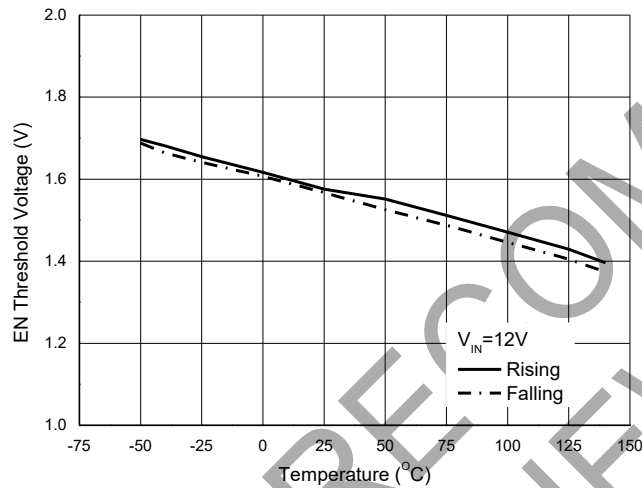


PWM Threshold Voltage vs. Temperature

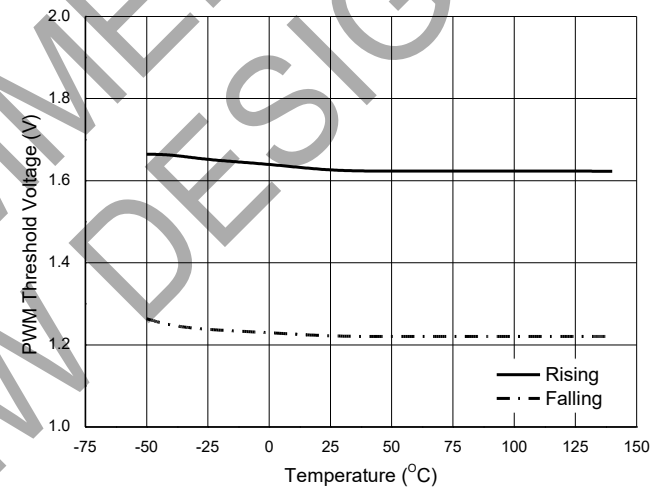

OV Threshold Voltage vs. Temperature

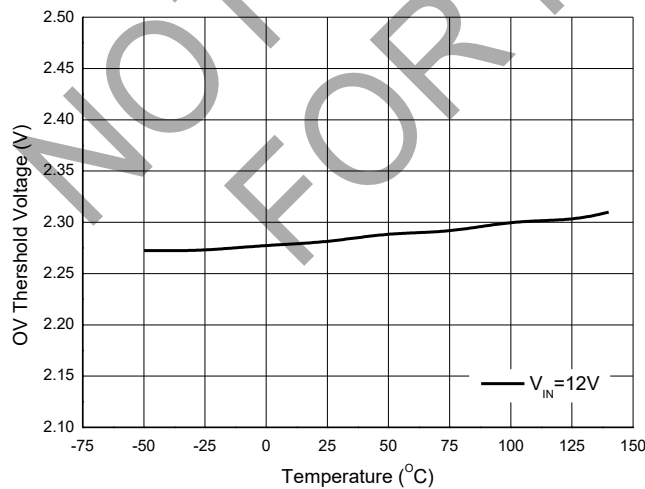


FB Low Threshold Voltage vs. Temperature

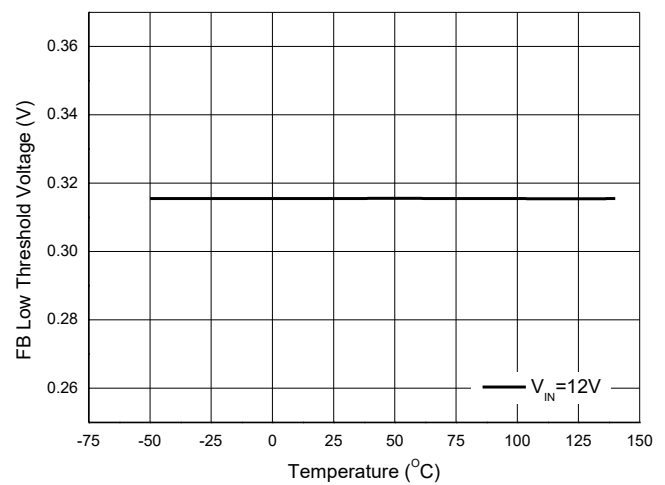


Performance Characteristics (continued)


FB High Threshold Voltage vs. Temperature

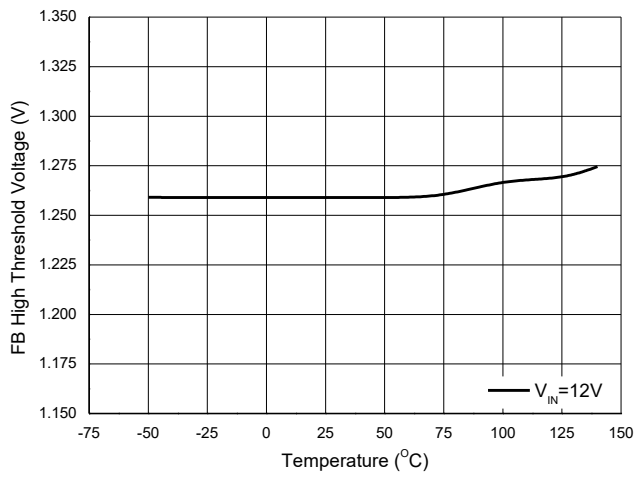


OV Low Threshold Voltage vs. Temperature

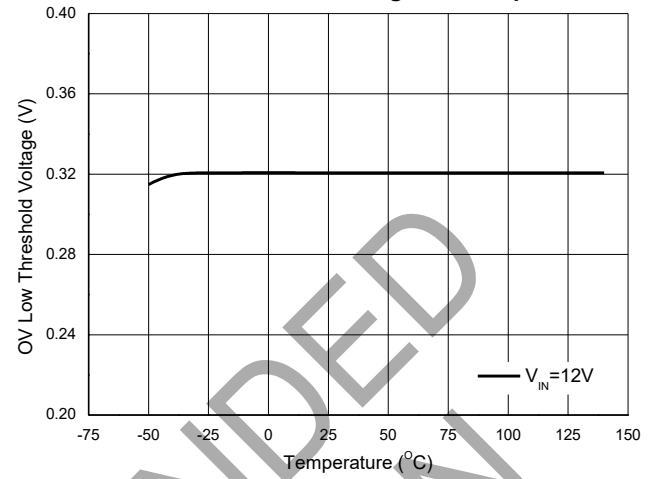


Soft-Start Current vs. Temperature

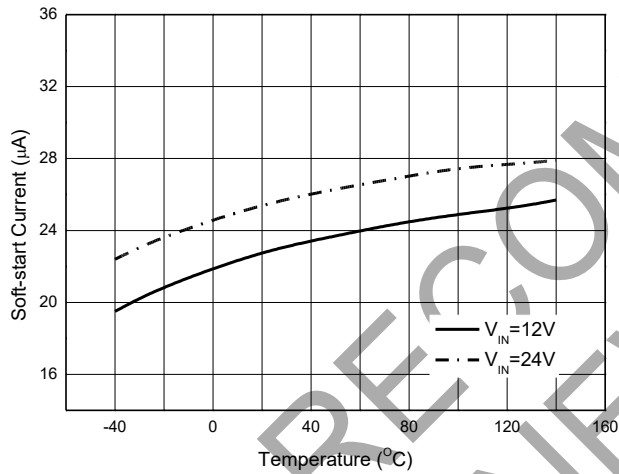

CT Charge Current vs. Temperature

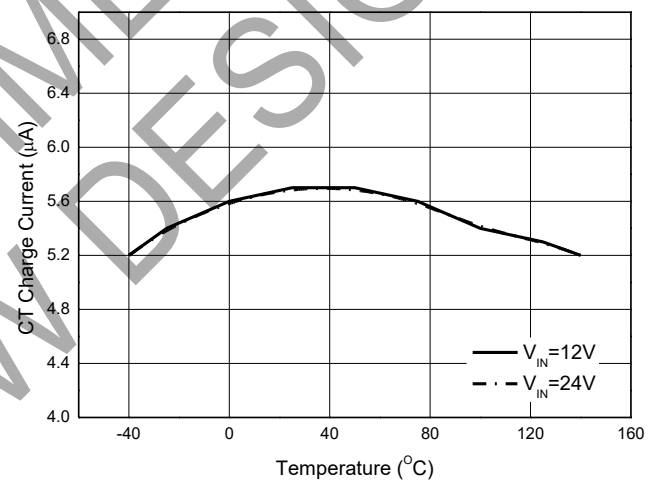


Ordering Information (Note 5)

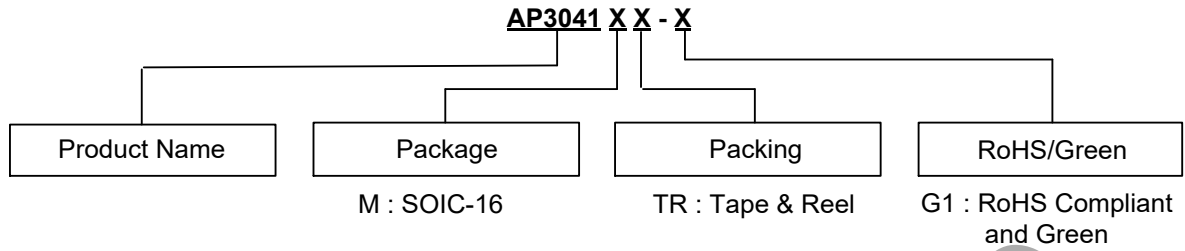

Orderable Part Number	Package	Temperature Range	Marking ID	Packing	
				Qty.	Carrier
AP3041MTR-G1	SOIC-16	-40 to +85°C	AP3041M-G1	4,000	13" Tape & Reel


Note: 5. For packaging details, go to our website at <https://www.diodes.com/design/support/packaging/diodes-packaging/>.

Marking Information

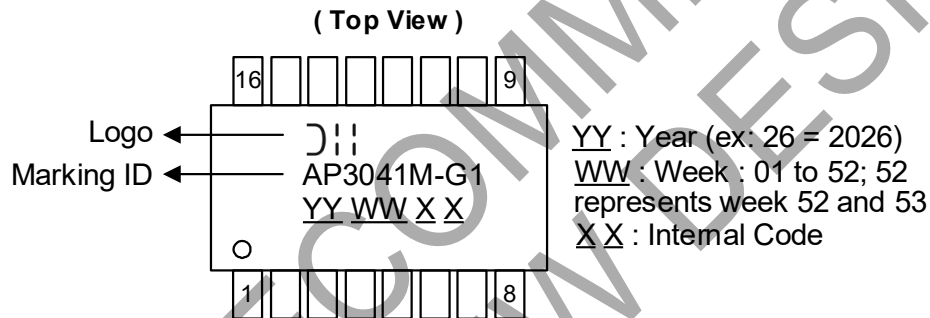

Package Outline Dimensions (All dimensions in mm(inch).)

 Please see <http://www.diodes.com/package-outlines.html> for the latest version.

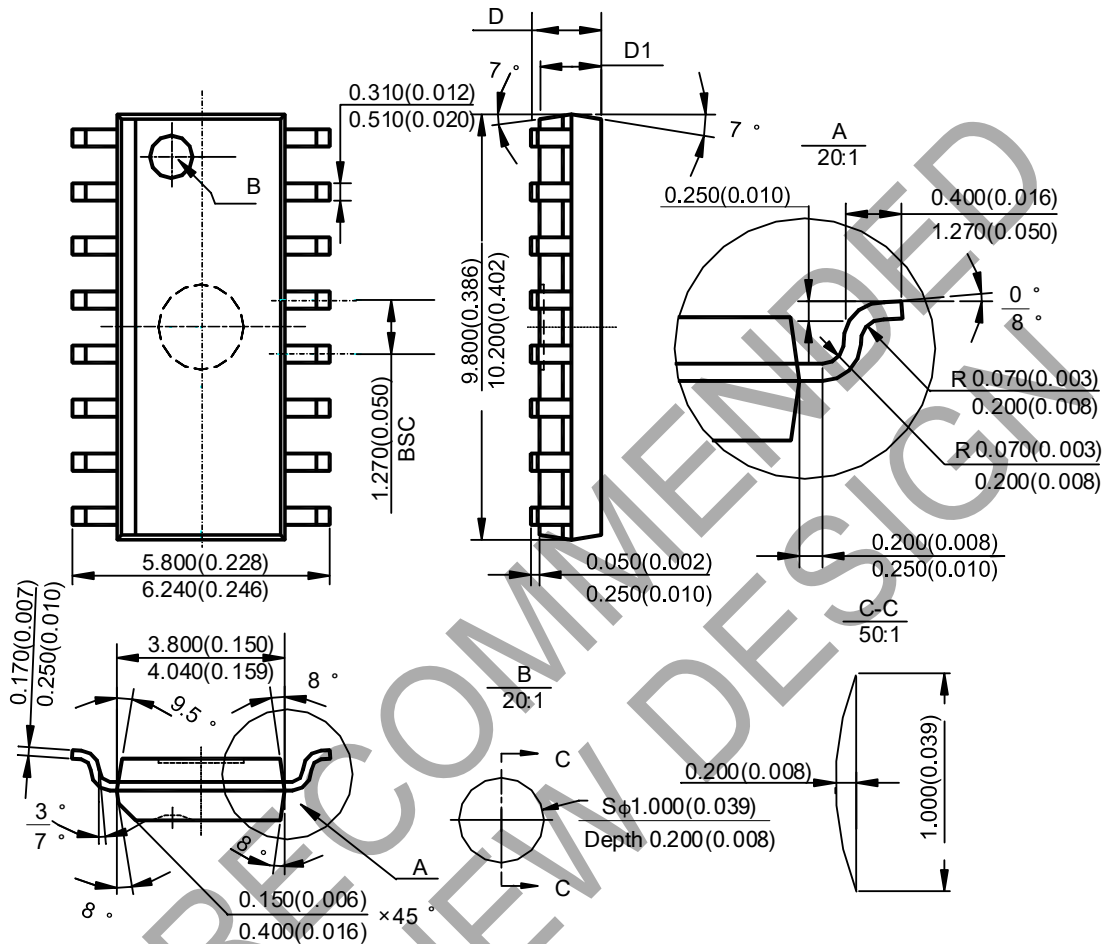(1) Package Type: SOIC-16


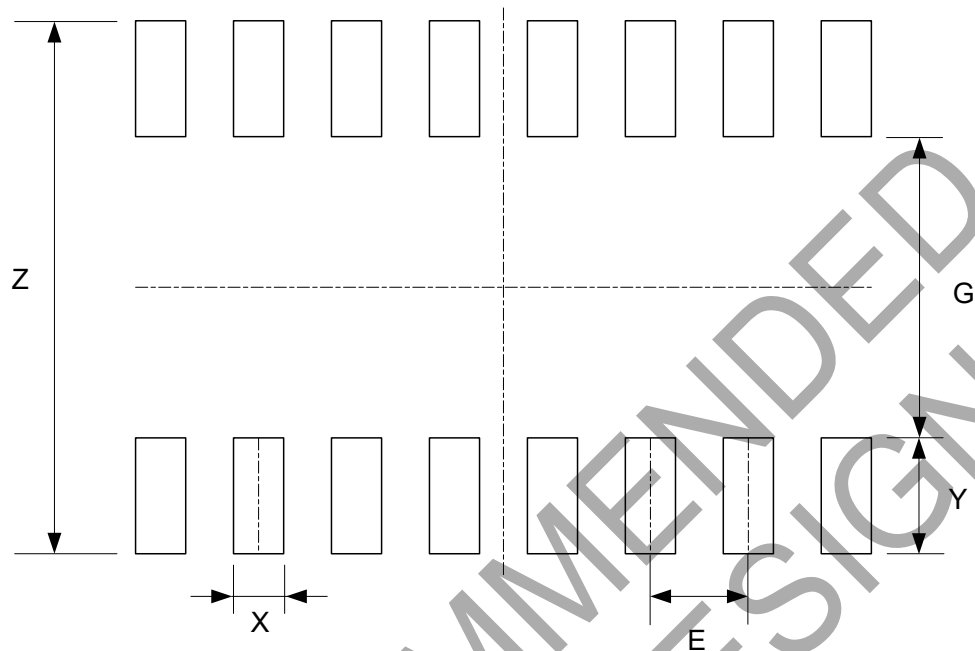
Note: Eject hole, oriented hole and mold mark is optional.

Symbol	D				D1			
	min(mm)	max(mm)	min(inch)	max(inch)	min(mm)	max(mm)	min(inch)	max(inch)
Option1	1.350	1.750	0.053	0.069	1.250	1.650	0.049	0.065
Option2	-	1.260	-	0.050	1.020	-	0.040	-

Suggested Pad Layout

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

(1) Package Type: SOIC-16



Dimensions	Z (mm)/(inch)	G (mm)/(inch)	X (mm)/(inch)	Y (mm)/(inch)	E (mm)/(inch)
Value	6.900/0.272	3.900/0.154	0.650/0.026	1.500/0.059	1.270/0.050

IMPORTANT NOTICE

1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (<https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.
9. This Notice may be periodically updated with the most recent version available at <https://www.diodes.com/about/company/terms-and-conditions/important-notice>

The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries.
All other trademarks are the property of their respective owners.
© 2026 Diodes Incorporated. All Rights Reserved.

www.diodes.com